


Configuration A



Figure 1. Dimensions and configurations.

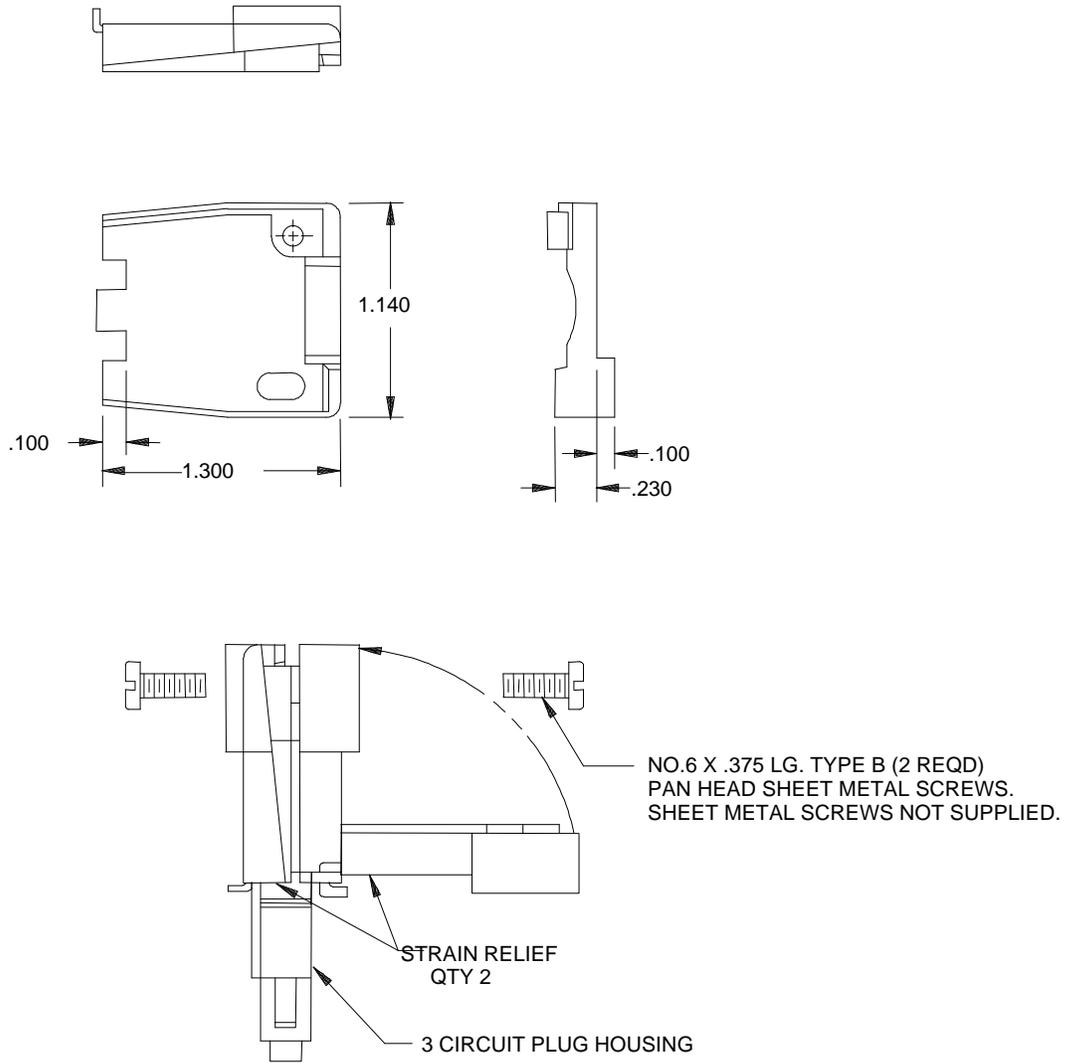

ASSEMBLY DETAILS


Configuration B

Figure 1. Dimensions and configurations - Continued.

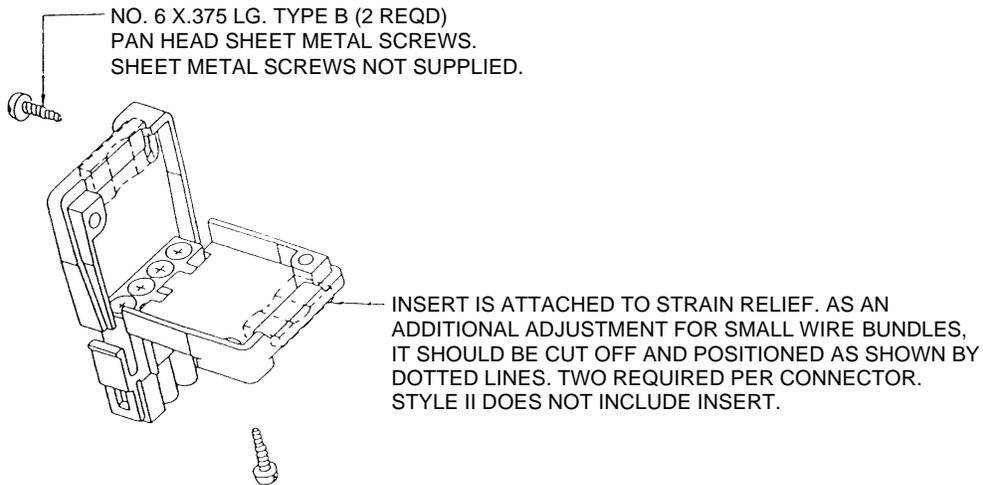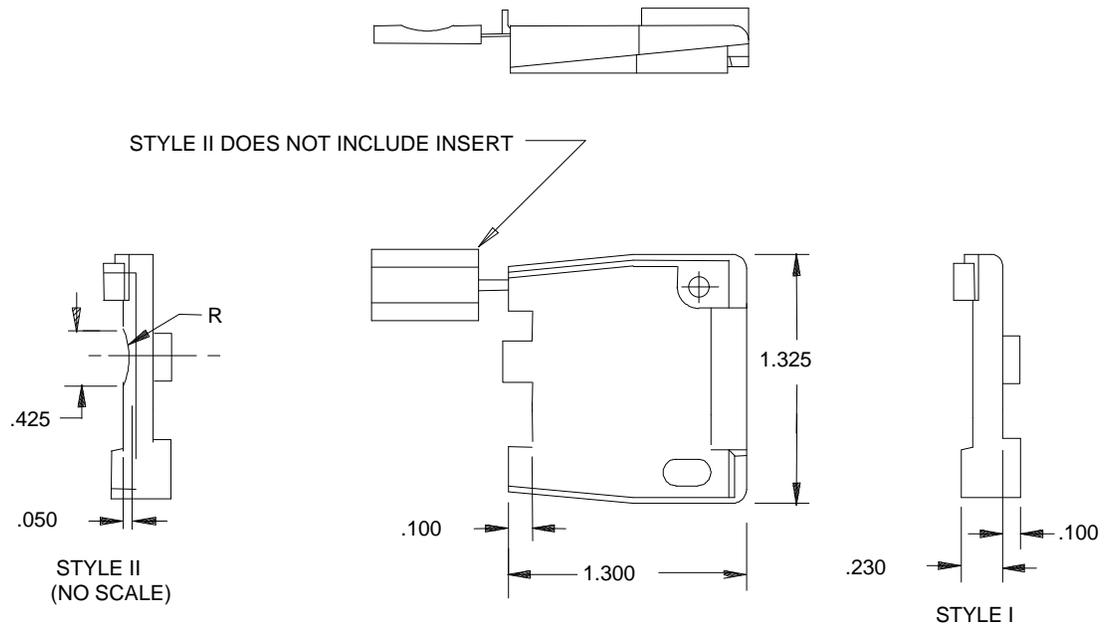

Configuration C




Figure 1. Dimensions and configurations - Continued.

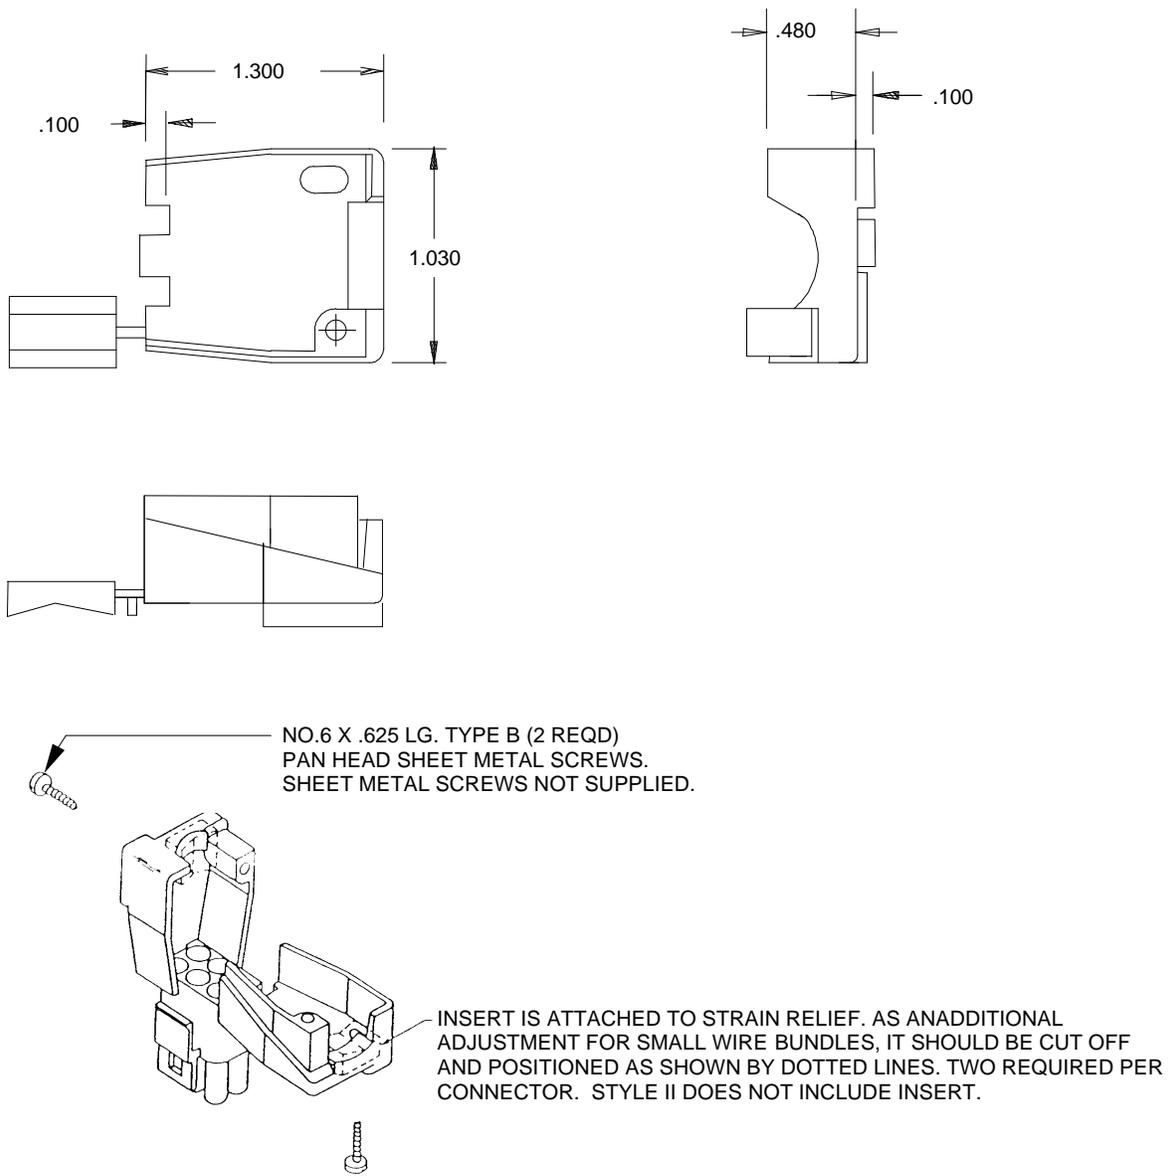


Configuration D

Figure 1. Dimensions and configurations - Continued.

A-A-55465A

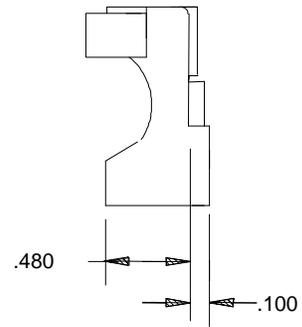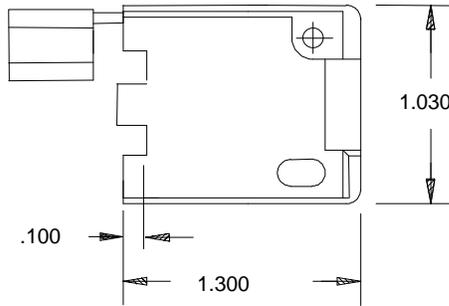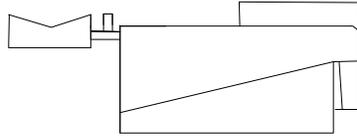




NO. 6 X .625 LG. TYPE B (2 REQD)  
PAN HEAD SHEET METAL SCREWS.  
SHEET METAL SCREWS NOT SUPPLIED.

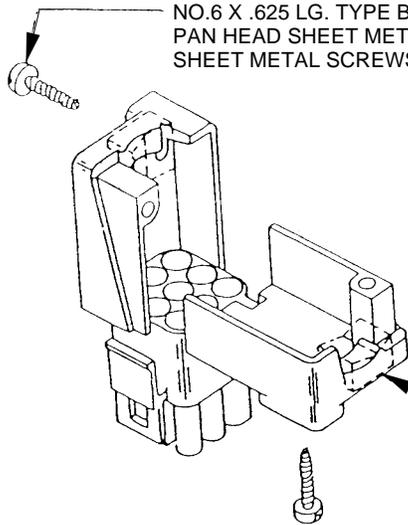


INSERT IS ATTACHED TO STRAIN RELIEF. AS AN  
ADDITIONAL ADJUSTMENT FOR SMALL WIRE BUNDLES,  
IT SHOULD BE CUT OFF AND POSITIONED AS SHOWN BY  
DOTTED LINES. TWO REQUIRED PER CONNECTOR.  
STYLE II DOES NOT INCLUDE INSERT.

Configuration E

Figure 1. Dimensions and configurations - Continued.

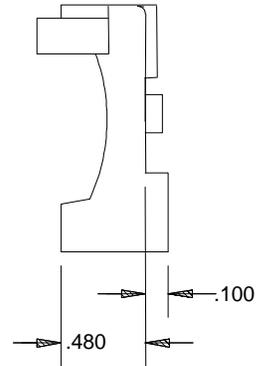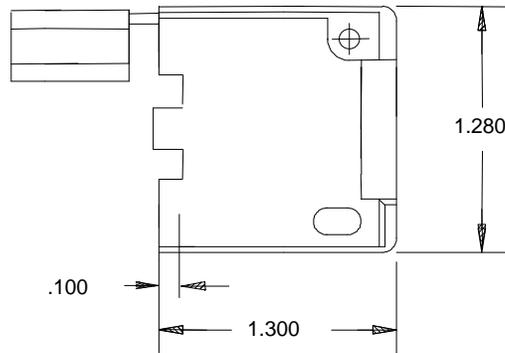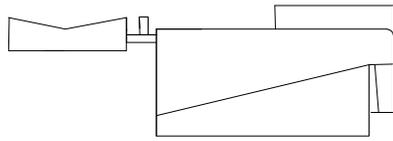

NO.6 X .625 LG. TYPE B (2 REQD)  
PAN HEAD SHEET METAL SCREWS.  
SHEET METAL SCREWS NOT SUPPLIED.



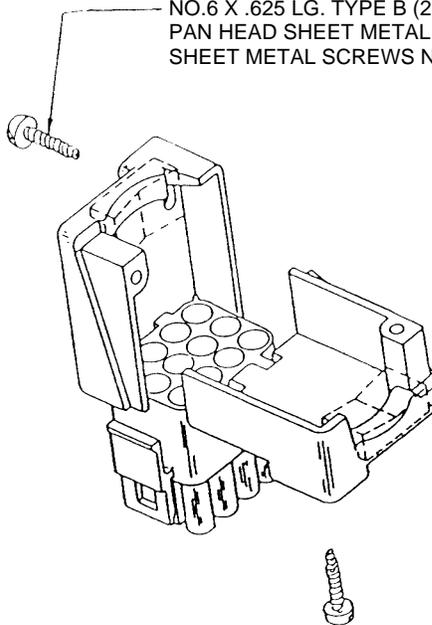


INSERT IS ATTACHED TO STRAIN RELIEF. AS AN  
ADDITIONAL ADJUSTMENT FOR SMALL WIRE BUNDLES,  
IT SHOULD BE CUT OFF AND POSITIONED AS SHOWN  
BY DOTTED LINES.


Configuration F

Figure 1. Dimensions and configurations - Continued.

A-A-55465A

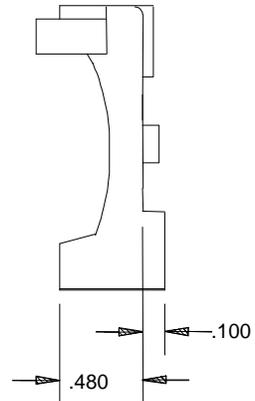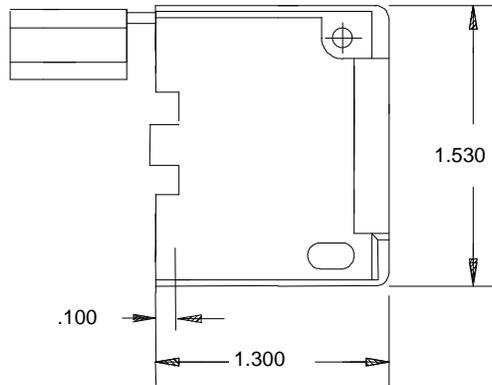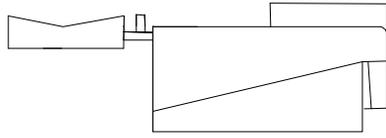

NO.6 X .625 LG. TYPE B (2 REQD)  
PAN HEAD SHEET METAL SCREWS.  
SHEET METAL SCREWS NOT SUPPLIED.

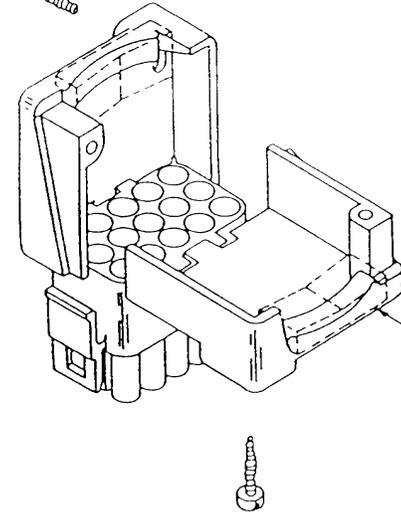

INSERT IS ATTACHED TO STRAIN RELIEF. AS AN  
ADDITIONAL ADJUSTMENT FOR SMALL WIRE BUNDLES,  
IT SHOULD BE CUT OFF AND POSITIONED AS SHOWN  
BY DOTTED LINES.

Configuration G

Figure 1. Dimensions and configurations - Continued.

mm	Inches
1.27	.050
2.54	.100
5.84	.230
9.53	.375
10.80	.425
12.19	.480
15.88	.625
24.38	.960
26.16	1.030
28.96	1.140
32.51	1.280
33.02	1.300
33.66	1.325
38.86	1.530

## NOTES:

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Unless otherwise specified tolerances shall be  $\pm 0.015$  inch (0.38 mm).
4. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.
5. The insert is attached to the strain relief and is used to provide additional adjustment for small wire bundles or it is discarded.
6. Pictorial representations are for reference purposes only.
7. Two pan head sheet metal screws are required for assembly, no. 6 x .375 long, not supplied.
8. Detachable insert may separate from strain relief body during shipping.
9. Two strain reliefs are required per connector.

Figure 1. Dimensions and configurations - Continued.

A-A-55465A

Regulatory requirements. This section is not applicable to this CID.

Quality assurance provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Contractor certification statement. The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurance practices, and is the same as the product provided as a bid sample. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Certificate of compliance. A certificate of compliance must be supplied with all parts supplied to this ID.

Packaging.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, labeling, and marking shall be as specified in the contract or purchase order.

Notes. This section contains relevant information which is useful to buyers, users and suppliers in the process of procuring the item, but is not mandatory.

Ordering data (see table II). Acquisition documents should specify the following:

- a. CID document number and revision and CID PIN.
- b. Quality assurance provisions.
- c. Packaging requirements.
- d. Color (if applicable).

Comments. Comments on this CID should be directed to Defense Electronics Supply Center, 1507 Wilmington Pike, ATTN: DESC-ELDI, Dayton, OH 45444-5270, or telephone (513) 296-5391.

Sources of supply. A suggested source of supply is listed in table II. Additional sources will be added as they become available.

TABLE II. Ordering data.

Suggested sources of supply				
CID PIN A-A-55465- 1/	Vendor commercial PIN	CID PIN A-A-55465- 1/	Vendor commercial PIN	Vendor CAGE number
Style I		Style II (no insert)		
01	640713-1	07	640713-2	00779
--	---	08	641945-1	00779
02	641776-1	09	641776-2	00779
03	640715-1	---	---	00779
04	640716-1	---	---	00779
05	640717-1	---	---	00779
06	640718-1	---	---	00779

1/ Two PIN's are required for one connector.

Vendor CAGE  
number

00779

Vendor name  
and address

AMP, Incorporated  
P. O. Box 3608  
Harrisburg, PA 17105-3608

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5935-D522)