


COMMERCIAL ITEM DESCRIPTION

COIL, RF, CHIP, FIXED, HIGH FREQUENCY, MINIATURE, SURFACE MOUNT

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. **SCOPE.** This CID covers the general requirements for a radio frequency coil. Coils covered by this CID are intended for commercial/industrial applications.
2. **CLASSIFICATION.** This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

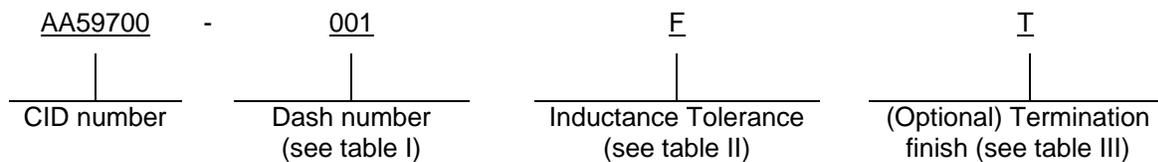


3. SALIENT CHARACTERISTICS.

- 3.1 Interface and physical dimensions. Coils supplied to this CID shall be as specified herein. (see figure 1).
- 3.2 Electrical characteristics. The electrical characteristics shall be as specified in table I.
- 3.3 Weight. The weight shall be no greater than 0.5 gram maximum.
- 3.4 Operating temperature range. The operating temperature range is -40°C to $+125^{\circ}\text{C}$.
- 3.5 Temperature rise. DC current rating for a 15°C rise.
- 3.6 Altitude. The maximum altitude is 70,000 feet.
- 3.7 Marking. Inductors supplied to this CID shall be marked with the manufacturer's standard commercial PIN.
- 3.8 Pure tin. The use of pure tin, as an underplate or final finish is prohibited both internally and externally. Tin content of transformer components and solder shall not exceed 97 percent, by mass. Tin shall be alloyed with a minimum of 3 percent lead, by mass.
- 3.9 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

Beneficial comments recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be addressed to: DLA Land and Maritime, Columbus, ATTN: VAT, P.O. Box 3990, Columbus OH 43218-3990, or email (transformers@dla.mil). Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at <https://assist.dla.mil>.

3.10 Workmanship. Coils shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

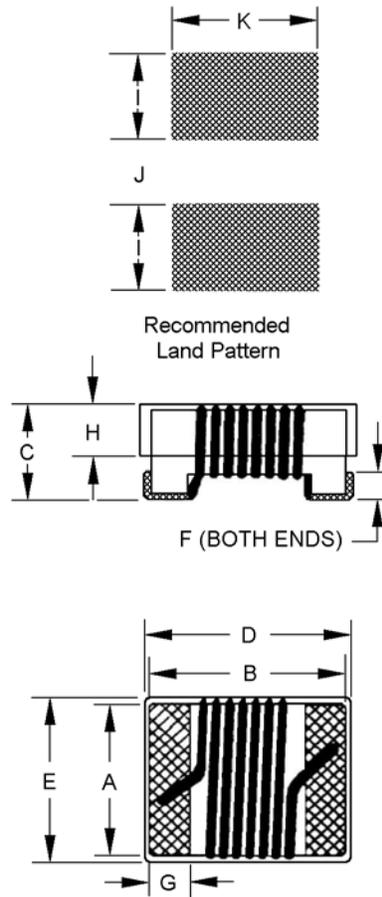

Dimension	INCHES	MM
A Ref	.047 - .053	1.19 - 1.35
B Ref	.075 - .085	2.41 - 2.67
C	.060 Max.	1.52 Max.
D	.095 Max.	2.41 Max.
E	.070 Max.	1.78 Max.
F Ref	.010 - .025	0.25 - 0.64
G Ref	.017 - .023	0.43 - 0.58
H	.020 Ref.	0.508 Ref.
I	.040	1.02
J	.030	0.76
K	.070	1.78

NOTES:

1. Dimensions are in Inches.
2. Metric equivalents are listed for general information only.

FIGURE 1. Configuration and dimensions.

TABLE I. Electrical characteristics.

CID dash number AA59700-	Inductance(nH)	Tolerance (±%)	Q Min	SRF Min (MHz)	DCR Max (OHMS)	$\frac{1}{I_{DC}MAX}$ (mA)
001**	2.8 @ 250 MHz	5	80 @ 1500 MHz	12200	.06	800
002**	3.0 @ 250 MHz	5	65 @ 1500 MHz	12200	.06	800
003**	3.3 @ 250 MHz	5	50 @ 1500 MHz	12200	.08	600
004**	5.6 @ 250 MHz	5	65 @ 1000 MHz	5900	.08	600
005**	6.8 @ 250 MHz	5	50 @ 1000 MHz	5600	.11	600
006**	7.5 @ 250 MHz	5	50 @ 1000 MHz	4800	.14	600
007**	8.2 @ 250 MHz	5, 2	50 @ 1000 MHz	4400	.12	600
008**	10 @ 250 MHz	5, 2	60 @ 500 MHz	4300	.10	600
009**	12 @ 250 MHz	5, 2	50 @ 500 MHz	4000	.15	600
010**	15 @ 250 MHz	5, 2	50 @ 500 MHz	3200	.17	600
011**	18 @ 250 MHz	5, 2	50 @ 500 MHz	3100	.20	600
012**	22 @ 250 MHz	5, 2	55 @ 500 MHz	2600	.22	500
013**	24 @ 250 MHz	5, 2	50 @ 500 MHz	2400	.22	500
014**	27 @ 250 MHz	5, 2	55 @ 500 MHz	2580	.25	500
015**	33 @ 250 MHz	5, 2, 1	60 @ 500 MHz	2150	.27	500
016**	36 @ 250 MHz	5, 2, 1	55 @ 500 MHz	1900	.27	500
017**	39 @ 250 MHz	5, 2, 1	60 @ 500 MHz	2000	.29	500
018**	43 @ 200 MHz	5, 2, 1	60 @ 500 MHz	1800	.34	500
019**	47 @ 200 MHz	5, 2, 1	60 @ 500 MHz	1700	.31	500
020**	56 @ 200 MHz	5, 2, 1	60 @ 500 MHz	1600	.34	500
021**	68 @ 200 MHz	5, 2, 1	60 @ 500 MHz	1500	.38	500
022**	82 @ 150 MHz	5, 2, 1	65 @ 500 MHz	1330	.42	400
023**	91 @ 150 MHz	5, 2, 1	65 @ 500 MHz	1330	.48	400
024**	100 @ 150 MHz	5, 2, 1	65 @ 500 MHz	1250	.46	400
025**	110 @ 150 MHz	5, 2	50 @ 250 MHz	1100	.48	400

TABLE I. Electrical characteristics. - continued

CID dash number AA59700-	Inductance(nH)	Tolerance ($\pm\%$)	Q Min	SRF Min (MHz)	DCR Max (OHMS)	$\frac{1}{I_{DCMAX}}$ (mA)
026**	120 @ 150 MHz	5, 2, 1	50 @ 250 MHz	1100	.51	400
027**	150 @ 100 MHz	5, 2, 1	50 @ 250 MHz	920	.56	400
028**	180 @ 100 MHz	5, 2, 1	50 @ 250 MHz	920	.64	400
029**	220 @ 100 MHz	5, 2	50 @ 250 MHz	820	.70	400
030**	240 @ 100 MHz	5, 2	44 @ 250 MHz	770	1.0	350
031**	270 @ 100 MHz	5, 2	48 @ 250 MHz	730	1.0	350
032**	330 @ 100 MHz	5, 2	48 @ 250 MHz	650	1.4	310
033**	390 @ 100 MHz	5, 2	48 @ 250 MHz	600	1.5	290
034**	470 @ 50 MHz	5, 2	33 @ 100 MHz	375	1.76	250
035**	560 @ 25 MHz	5, 2	23 @ 50 MHz	330	1.90	230
036**	680 @ 25 MHz	5, 2	23 @ 50 MHz	310	2.20	190
037**	820 @ 25 MHz	5, 2	23 @ 50 MHz	310	2.35	180

TABLE II. Inductance tolerances

Code	Tolerance (percentage)
F	± 1
G	± 2
J	± 5

TABLE III. Termination finish.

Code	Termination finish
Leave blank	Tin-lead
L	RoHS compliant, silver-palladium-platinum-glass-frit
T	RoHS, tin-silver-copper (95.5/4/0.5)

4. **REGULATORY REQUIREMENTS.** The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. **PRODUCT CONFORMANCE PROVISIONS**

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

- a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.
- b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 2 years.

6. **PACKAGING.** Preservation, packing, and marking shall be as specified in the contract or order.

7. **NOTES.**

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Environmentally preferable material. Environmentally preferable materials should be used to the maximum extent possible to meet the requirements of this specification. As of the dating of this document, the U.S. Environmental Protection Agency (EPA) is focusing efforts on reducing 31 priority chemicals. The list of chemicals is available on their website at <http://www.epa.gov/epaoswer/hazwaste/minimize/chemlist.htm>. Further information is available at the following EPA site: <http://www.epa.gov/epaoswer/hazwaste/minimize/>. Included in the EPA list of 31 priority chemicals are cadmium, lead, and mercury. Use of the materials on the list should be minimized or eliminated unless needed to meet the requirements specified herein (see Section 3).

7.3 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these inductors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.4 Source of documents.

FEDERAL REGULATIONS

FAR - Federal Acquisition Regulations (FAR)

(Copies of these documents are available online at www.acquisition.gov/comp/far/index.html or from the U.S. Government Printing Office, 732 North Capital Street, NW, Washington D.C. 20401.)

7.5 Tin whisker growth. The use of alloys with tin content greater than 97 percent, by mass, may exhibit tin whisker growth problems after manufacture. Tin whiskers may occur anytime from a day to years after manufacture and can develop under typical operating conditions, on products that use such materials. Conformal coatings applied over top of a whisker-prone surface will not prevent the formation of tin whiskers. Alloys of 3 percent lead, by mass, have shown to inhibit the growth of tin whiskers. For additional information on this matter, refer to ASTM-B545 (Standard Specification for Electrodeposited Coatings of Tin)

7.6 Ordering data. The contract or order should specify the following:

- a. CID document number, revision, and CID PIN.
- b. Product conformance provisions.
- c. Packaging requirements.

7.7 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

<u>MFR's CAGE</u>	<u>MFR's name and address</u>
02113	Coilcraft Inc 1102 Silver Lake Road Cary, Illinois 60013-1658 Phone number (847) 639-2361 Uniform Resource Locator (URL): www.coilcraft.com

7.8 Part number (P/N) supersession data. This CID supersedes the following manufacturers' P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE II. P/N supersession data. 1/

CID dash number (see table I) AA59700-	Vendor commercial PIN CAGE 02113 2/	CID dash number (see table I) AA59700-	Vendor commercial PIN CAGE 02113 2/
001**	0805CS-020XJL*	020**	0805CS-560X*L*
002**	0805CS-3N0XJL*	021**	0805CS-680X*L*
003**	0805CS-030XJL*	022**	0805CS-820X*L*
004**	0805CS-050XJL*	023**	0805CS-910X*L*
005**	0805CS-060XJL*	024**	0805CS-101X*L*
006**	0805CS-070XJL*	025**	0805CS-111X*L*
007**	0805CS-080X*L*	026**	0805CS-121X*L*
008**	0805CS-100X*L*	027**	0805CS-151X*L*
009**	0805CS-120X*L*	028**	0805CS-181X*L*
010**	0805CS-150X*L*	029**	0805CS-221X*L*
011**	0805CS-180X*L*	030**	0805CS-241X*L*
012**	0805CS-220X*L*	031**	0805CS-271X*L*
013**	0805CS-240X*L*	032**	0805CS-331X*L*
014**	0805CS-270X*L*	033**	0805CS-391X*L*
015**	0805CS-330X*L*	034**	0805CS-471X*L*
016**	0805CS-360X*L*	035**	0805CS-561X*L*
017**	0805CS-390X*L*	036**	0805CS-681X*L*
018**	0805CS-430X*L*	037**	0805CS-821X*L*
019**	0805CS-470X*L*		

1/ When "*" is used for coded values, it's the contractors responsibility to select those options allowed by the CID.

2/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

7.9 Government users. To acquire information on obtaining these coils from the Government inventory system, contact DLA Land and Maritime, ATTN: FMTC, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-7727.

7.10 Changes from previous issue. The margins of this CID are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA - CC

Project 5950-2013-015

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.