

MILITARY SPECIFICATION SHEET
BATTERY, DRY, BA-65

INACTIVE FOR NEW DESIGN AFTER
6 FEBRUARY 2002 AND IS NO LONGER USED,
EXCEPT FOR REPLACEMENT PURPOSES.

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and [MIL-B-18](#).

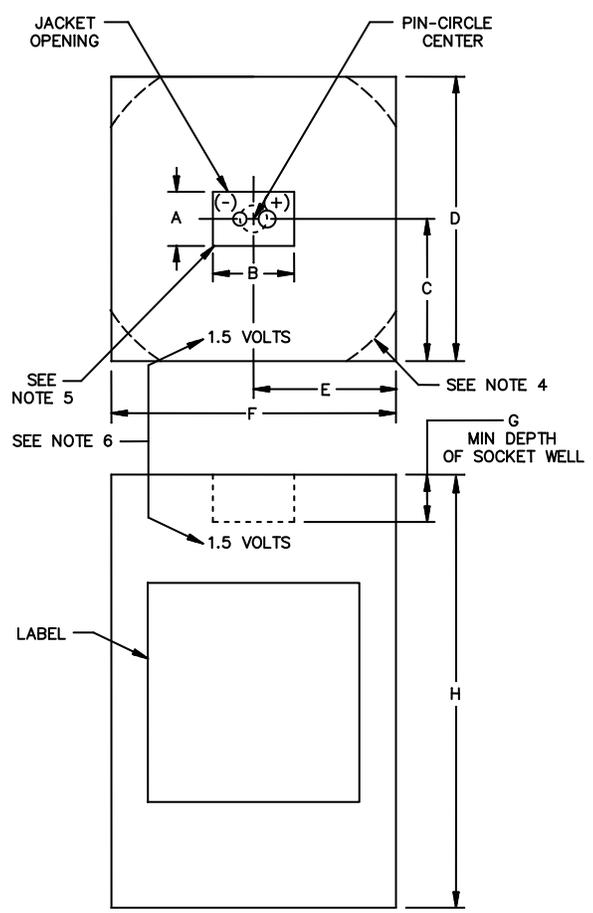


FIGURE 1. Battery dimensions.

MIL-B-18/31E

Ltr	Inches		mm	
	Min	Max	Min	Max
A	.495	.505	12.57	12.83
B	.745	.755	18.92	19.18
C	1.308	1.318	33.22	33.48
D	2.620	2.630	66.55	66.80
E	1.308	1.318	33.22	33.48
F	2.620	2.630	66.55	66.80
G	.433	.443	11.00	11.25
H	3.688	4.313	93.68	109.47

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.005 (0.13 mm) for three place decimals and ± 0.02 (0.5 mm) for two place decimals.
4. Square, diagonal, or round corners are optional.
5. Socket type I is required. (see MIL-B-18 for details.)
6. Voltage markings may be placed either on the top or front face of the battery.
7. Marking to be in accordance with MIL-B-18.

FIGURE 1. Battery dimensions - Continued.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Nominal voltage: 1.5 volts.

Usual number and type of cells: 4 "F" cells

Usual cell connection: Parallel.

Terminals: 2-hole socket.

Weight (maximum): 1 pound, 8 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

MIL-B-18/31E

First article inspection in accordance with MIL-B-18:

- Visual and mechanical (external).
- Battery voltage.
- Vibration test.
- Mechanical-shock test in accordance with MIL-STD-202, method 213, test condition I.
- Insulation resistance test in accordance with MIL-STD-202, method 302, test condition B, tolerance ± 20 volts.
- Capacity, D (without storage).
- Jacket integrity test.

Conformance inspection in accordance with MIL-B-18:

- Visual and mechanical (external).
- Battery voltage.
- Insulation-resistance test in accordance with MIL-STD-202, method 302, test condition B, tolerance ± 20 volts.
- Vibration test.
- Mechanical-shock test in accordance with MIL-STD-202, method 213, test condition I.
- Jacket integrity test.
- Electrolyte leakage.
- Capacity, D and T.

Method of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage:	Test	Period
	D	12 months
	T	90 days

Discharge: The battery shall be discharged through 5 ohms for 2 periods or 1 hour each daily. The intervals between discharge periods shall be 6 hours and 16 hours, respectively. This cycle shall be repeated continuously to a test-end voltage of 0.9 volt.

Closed circuit voltage: Use TS-183 ()/U test per special marking or, with minimum permissible voltage as specified for TS-183 ()/U, use a load resistance value of 1.998 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ()/U:	
USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
1	1.40

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Part or Identifying Number (PIN): BA-65, see 1.2 of MIL-B-18.

MIL-B-18/31E

Reference documents. In addition to [MIL-B-18](#), this document references the following:

[MIL-STD-202](#)

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 6135-2010-051)

Review activities:
Army - MI
Navy - MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil>.