

INCH-POUND  
MIL-DTL-12520/10B  
31 March 2005  
SUPERSEDING  
MIL-C-12520/10A (EL)  
5 November 1965

DETAIL SPECIFICATION SHEET  
CONNECTORS, RECEPTACLE, ELECTRICAL WATERPROOF  
(SHELL SIZE 26, MALE INSERTS)

Inactive for new design after 24 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-12520.


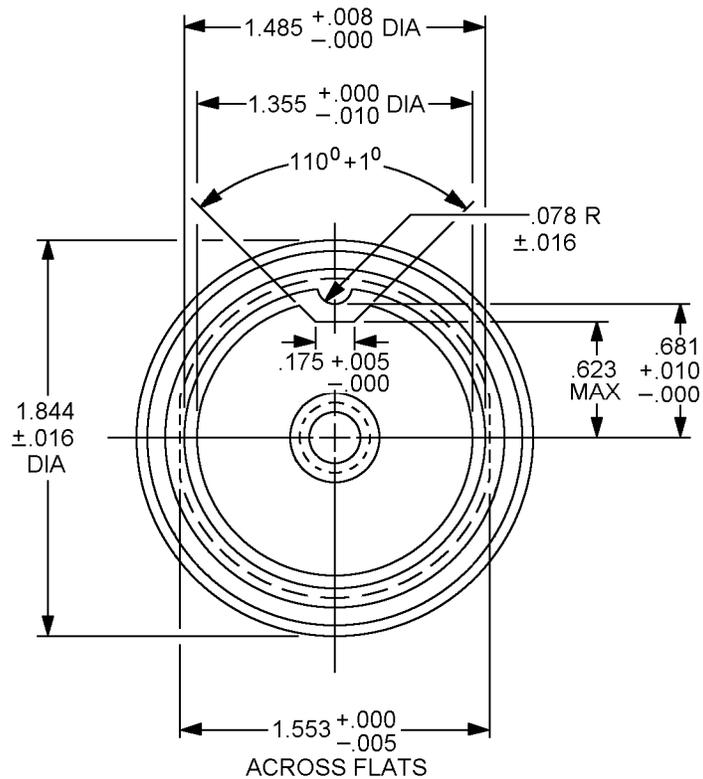


FIGURE 1. Receptacle shell and insert dimensions.

MIL-DTL-12520/10B

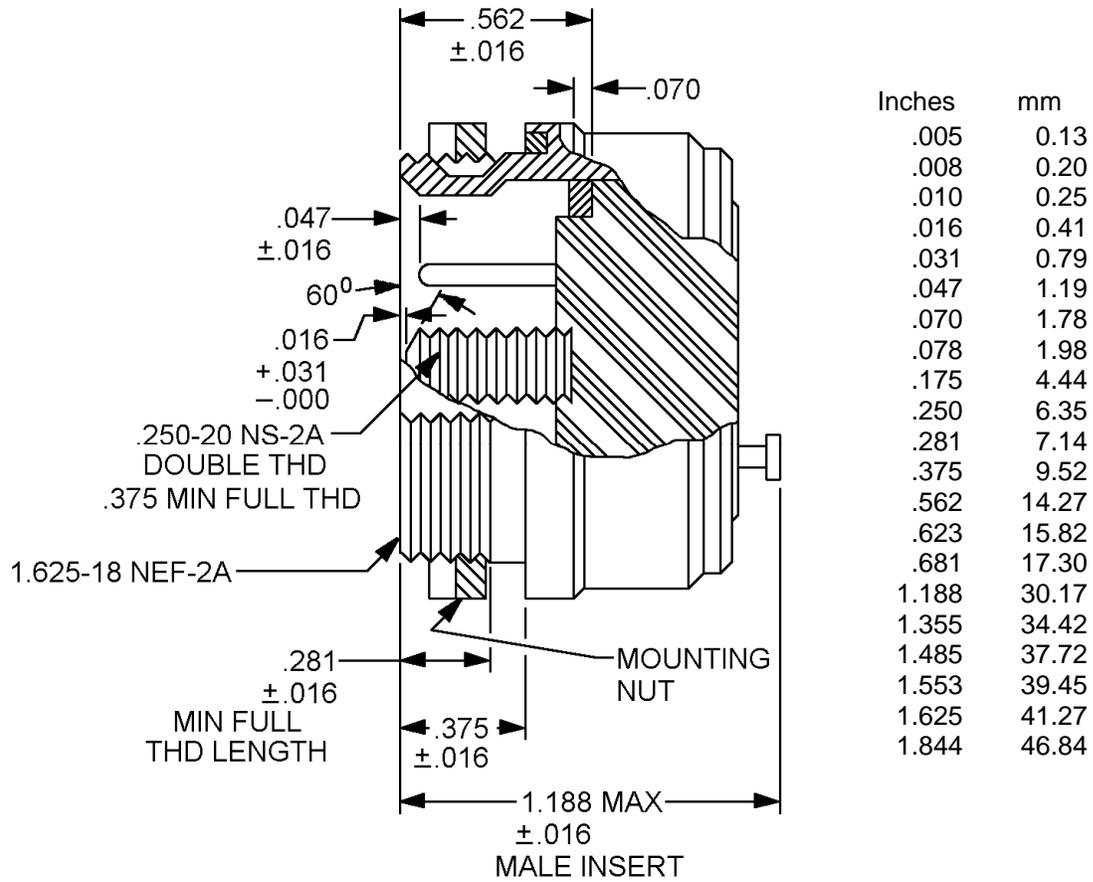


NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are  $\pm .005$  (0.13 mm).

FIGURE 1. Receptacle shell and insert dimensions – Continued.

MIL-DTL-12520/10B

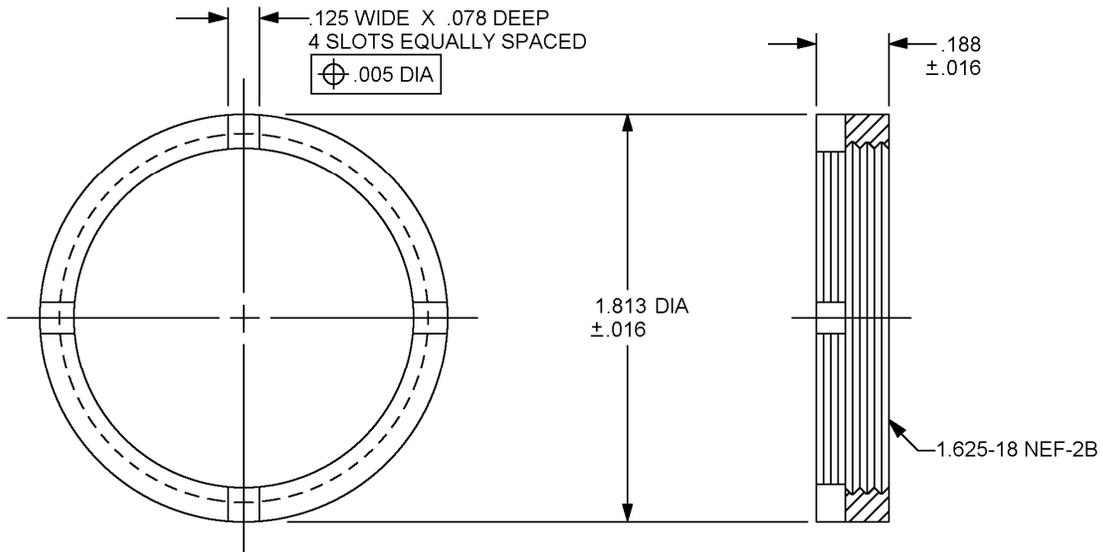

Inches	mm
.005	0.13
.016	0.41
.078	1.98
.125	3.17
.188	4.77
1.625	41.27
1.812	46.02

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are  $\pm .005$  (0.13 mm).

FIGURE 2. Mounting nut dimensions.

MIL-DTL-12520/10B

REQUIREMENTS

Connectors covered by this specification shall have the electrical ratings specified in table I.

TABLE I. Electrical ratings.

Connector type	Limiting operating voltage (sea level)		Nominal current
	AC	DC	Amperes
UW2026MC00	900	1,250	22
UW2026MD00	500	700	22
UW2026ME00	500	700	11
UW2026MF00	500	700	11
UW2026MG00	900	1,250	73

Dimensions and configurations: See figures 1 and 2.

Design and construction: Connectors shall be of the design, construction, and physical dimensions specified on figure 1.

Mounting nut: The mounting nut shall be as specified on figure 2. Material shall be brass conforming to ASTM-B36 and ASTM-B121, and shall be cadmium plated in accordance with class 1, type II, of SAE-AMS-QQ-P-416. The resulting finish shall be olive drab in color.

This receptacle connector mates with MIL-C-12520/3.

Dielectric withstanding voltage: Test in accordance with MIL-DTL-12520, except that the connectors with insert arrangements C and G are subjected to a test potential of 2,800 V rms. Connectors with insert arrangements D, E, and F shall be subject to a test potential of 2,800 V rms.

Cover and chain assemblies: Cover and chain assemblies are in accordance with style 1N in MIL-C-12520/13.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Reference documents. In addition to MIL-DTL-12520, this document references the following:

- ASTM-B36
- ASTM-B121
- MIL-C-12520/3
- MIL-C-12520/13
- SAE-AMS-QQ-P-416

MIL-DTL-12520/10B

CONCLUDING MATERIAL

Custodians:

Army - CR  
Navy - AS  
Air Force - 11  
DLA - CC

Preparing activity:  
DLA - CC

(Project 5935-4726-003)

Review activities:

Navy - MC  
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.