

MILITARY SPECIFICATION

CONNECTORS, PLUG, ELECTRICAL, WATERPROOF
(ROUND SHAPE, SHELL SIZE 26, MALE INSERTS, BELLOWS
CLAMP)

1. SCOPE

1.1 Scope.- This specification covers the detail requirements for the following field-serviceable, shell size 26, round shape, bellows clamp, waterproof, electrical plug with male inserts.

1.2 Ratings.- Connectors covered by this specification shall have the electrical ratings specified in Table 1.

Table 1 - Electrical ratings

Connector type	Limiting operating voltage (sea level)		Nominal current
	AC	DC	Amperes
UW1126MCOO	900	1,250	22

2. APPLICABLE DOCUMENTS

2.1 The following specifications, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

MILITARY

MIL-C-12520	Connectors, Plug and Receptacle (Electrical, Waterproof); and Accessories; General Specification for.
MIL-C-12520/11A	Connectors, Receptacle, Electrical, Waterproof (Shell Size 26, Female Inserts).

3. REQUIREMENTS

3.1 Requirements.- Requirements shall be in accordance with Specification MIL-C-12520, and as specified herein.

3.2 Design and construction.- Connectors shall be of the design, construction, and physical dimensions specified on figure 1.

3.2.1 Assembly.- Connectors shall be capable of being disassembled to allow access to the contact terminals without the use of special tools.

3.3 Contacts.- Contacts shall be gold plated.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection.- Sampling and inspection shall be in accordance with Specification MIL-C-12520, and as specified herein.

4.2 Test and mating receptacles.- The test and mating receptacles shall be in accordance with the applicable type covered by Specification MIL-C-12520/11A.

4.3 Dielectric withstanding voltage.- Connectors with insert-arrangements C and G shall be subjected to a test potential of 2,800 volts root mean square (rms). Connectors with insert-arrangements D, E, and F shall be subjected to a test potential of 2,000 volts rms.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL-C-12520.


6. NOTES

6.1 Notes.- In addition to the notes specified herein, the notes specified in Specification MIL-C-12520 are applicable to this specification.

6.2 Intended use.- Connectors covered by this specification are intended for use where field-serviceable, waterproof, electrical connectors are required.

6.2.1 Mating receptacle connectors.- Mating receptacle connectors are in accordance with Specification MIL-C-12520/11A.

6.2.2 Cover and chain assemblies.- Cover and chain assemblies are in accordance with style 1N of Specification MIL-C-12520/13A "Cover and Chain Assemblies (Internal Threads, for Use on Waterproof Connectors)".

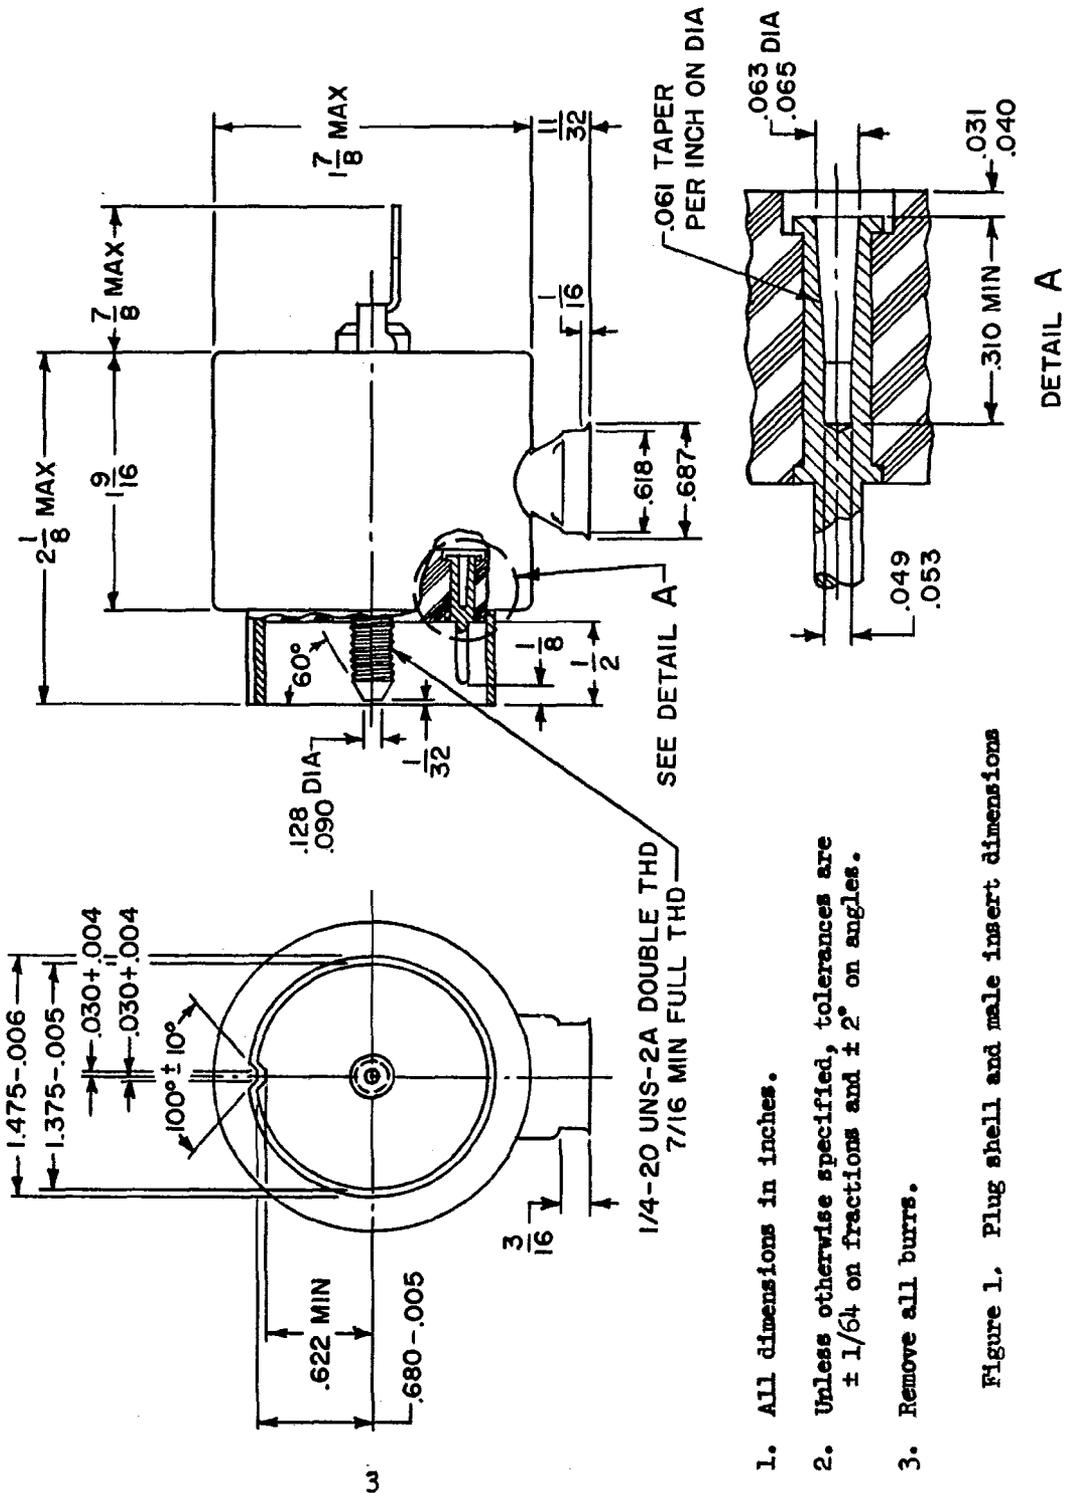

1. All dimensions in inches.
2. Unless otherwise specified, tolerances are $\pm 1/64$ on fractions and $\pm 2^\circ$ on angles.
3. Remove all burrs.

Figure 1. Plug shell and male insert dimensions

MIL-C-12520/15(EL)

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIAN

EL

Preparing activity

EL

Project Nr. 5935-A147