

DETAIL SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, FLEXIBLE, COAXIAL,
93 OHMS, M17/30-RG062

Inactive for new design after 13 August 1993. For new design use MIL-C-17/185.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-17.

NOTE: This cable uses PVC material and is not to be used in enclosed environments or shipboard applications. The replacements that are to be used in enclosed areas or shipboard applications are referenced in the following table.

The Air Force has restricted use of PVC in aerospace and ground support applications.

Cables listed on the current QPL may continue to be manufactured and supplied for existing enclosed applications only for a period not to exceed 3 years from the date of this specification.

TABLE I. Cross-reference data.

Canceled Part or Identifying Number (PIN)	Replacement PIN
M17/30-RG062	M17/185-00001

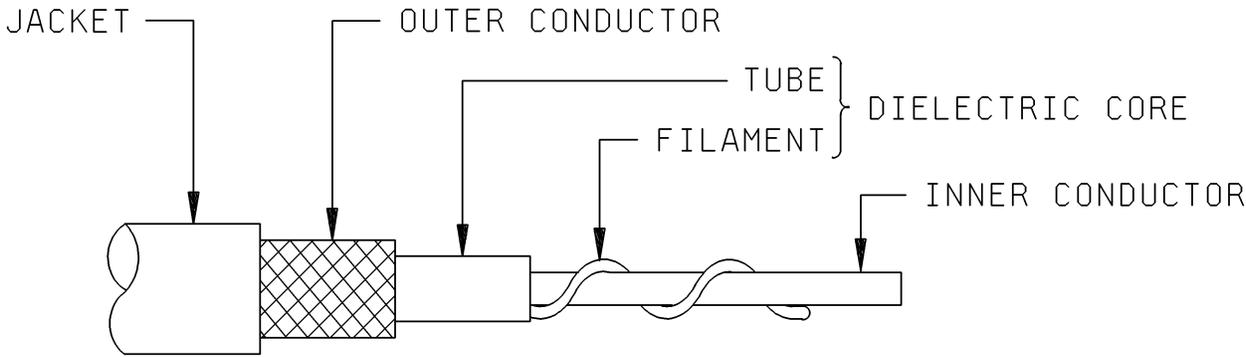


FIGURE 1. Configuration.

MIL-DTL-17/30D
w/AMENDMENT 1

TABLE II. Description.

Components	Construction details
Inner conductor	Solid, copper-covered, steel wire. Overall diameter: 0.0253 inch \pm 0.0010.
Dielectric core	Type A-3: Air spaced polyethylene. A monofilament thread, .035 inch approximate diameter, with a lay of .5 inch approximate, under an extruded tube. Diameter: 0.146 inch \pm 0.005.
Outer conductor	Single braid of AWG #34, bare copper wire. Diameter: 0.191 inch maximum. <u>Alternate</u> Coverage: 94.3% nominal 96.5% nominal Carriers: 16 24 Ends: 7 5 Picks/inch: 8.2 \pm 10% 12.3 \pm 10%
Jacket	Type IIa: PVC. Diameter: 0.242 inch \pm 0.007.

ENGINEERING INFORMATION

Continuous working voltage: 750 V rms, maximum.

Operating frequency: 1 GHz, maximum.

Velocity of propagation: 83 percent, nominal.

Power rating: See figure 2.

Operating temperature range: -40°C to +80°C.

Inner conductor properties:

DC resistance (maximum at 20°C): 4.4 ohms per 100 feet.

Elongation: 1 percent, minimum.

Tensile strength: 110klb_f/inch², minimum.

Engineering notes: This cable useful in general purpose low capacitance, medium low temperature applications. (See connector series "TNC" and "BNC" in accordance with MIL-PRF-39012).

REQUIREMENTS

Dimensions, configuration, and descriptions: See figure 1 and table II.

Environmental and mechanical:

MIL-DTL-17/30D
w/AMENDMENT 1

Visual and mechanical examination:
Out-of-roundness: Not applicable.

Eccentricity: 10 percent, maximum.

Adhesion of conductors: Not applicable.

Aging stability: $+98^{\circ}\text{C} \pm 2^{\circ}\text{C}$.

Stress crack resistance: Not applicable.

Outer conductor integrity: Not applicable.

Cold bend: $-55^{\circ}\text{C} \pm 2^{\circ}\text{C}$.

Dimensional stability: Not applicable.

Contamination: Applicable.

Bendability: Not applicable.

Flammability: Not applicable.

Weight: 0.038 pounds per foot, nominal.

ELECTRICAL:

Continuity: Applicable.

Spark test: 5,000 V rms, +10%, -0%.

Voltage withstanding: 3,000 V rms, +10%, -0%.

Insulation resistance: Not applicable.

Corona extinction voltage: Not applicable.

Characteristic impedance: 93 ohms ± 5 .

Attenuation: 8.0 dB at 400 MHz and 13 dB at 1 GHz.

Structural return loss: Not applicable.

Capacitance: 14.5 pF per foot, maximum.

Capacitance stability: $\pm 1.5\%$, maximum.

Capacitance unbalance: Not applicable.

Transmission unbalance: Not applicable.

MIL-DTL-17/30D
w/AMENDMENT 1

Mechanically induced noise voltage: Not applicable.

Time delay: Not applicable.


PIN: M17/30-RG062 (NATO preferred type NWR-12). See table I.

Supersession data: See table III.

TABLE III. Cross reference of PIN.

PIN	Superseded PIN or Type designation
M17/30-RG062	RG-62A/U

MIL-DTL-17/30D
w/AMENDMENT 1

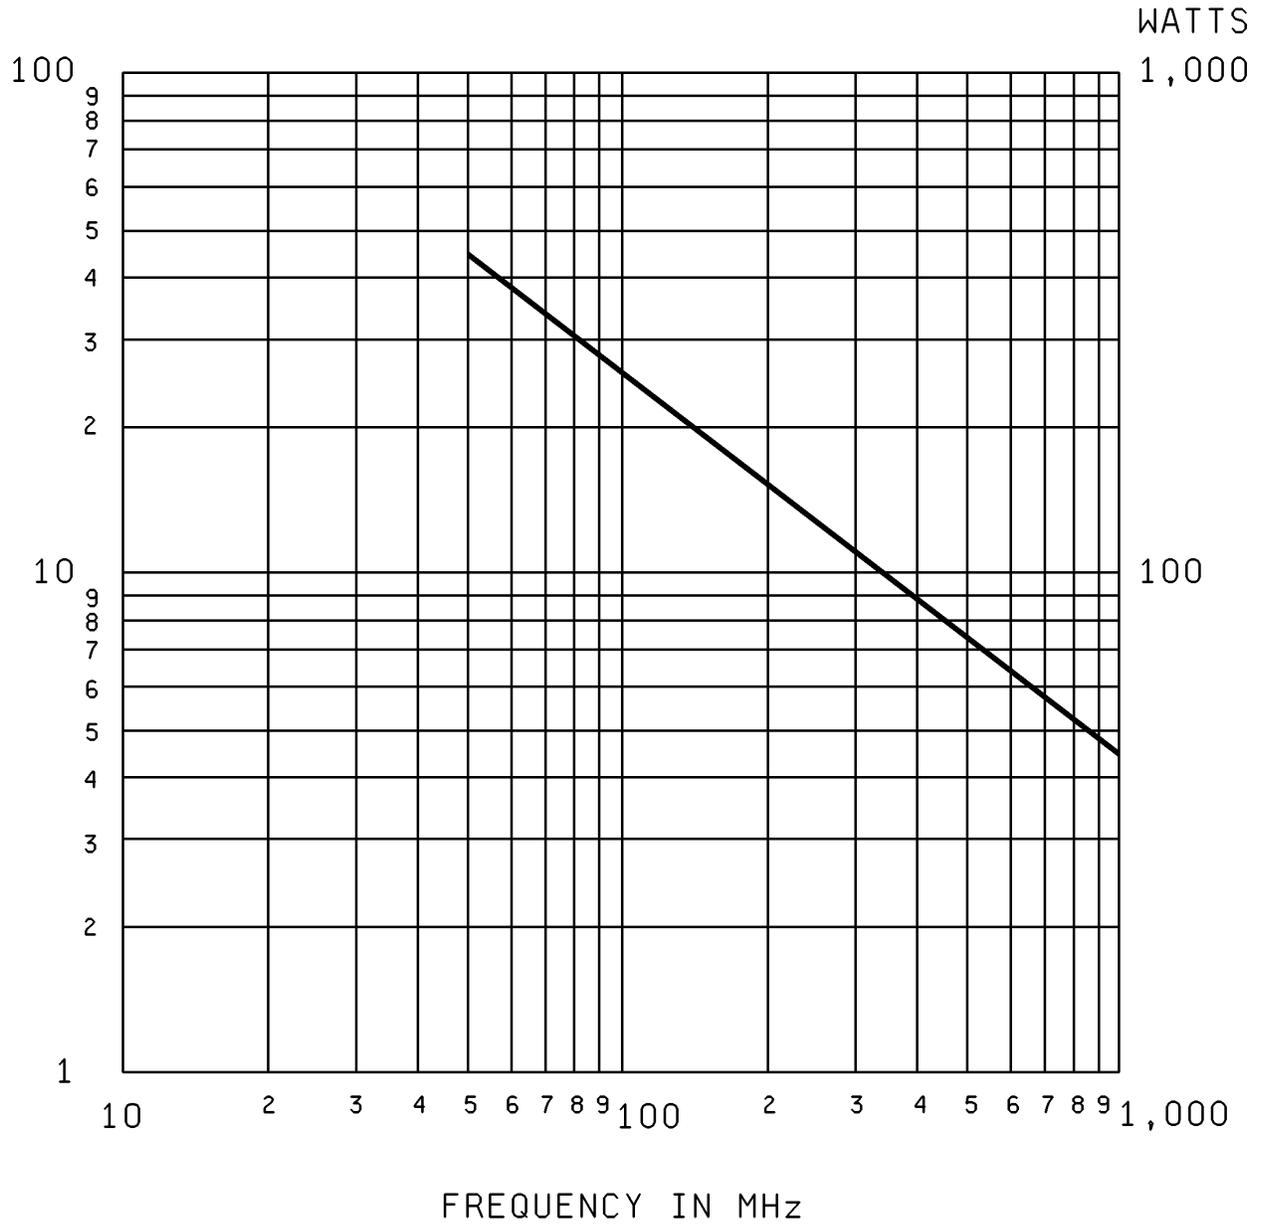

MAXIMUM POWER _____
AT 25°C SEA LEVEL

FIGURE 2. Power rating.

MIL-DTL-17/30D
w/AMENDMENT 1

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-17, this document references the following:

MIL-PRF-39012
MIL-C-17/185

CONCLUDING MATERIAL

Custodians:

Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 6145-2010-024)

Review activities:

Army – AT, CR4, MI
Navy – AS, MC, OS, SH, TD
Air Force – 19, 99
DLA - IS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil>