

INCH-POUND

MS18062D
12 March 2013
SUPERSEDING
MS18062C
25 October 2005

DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, DUMMY STOWAGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22992.

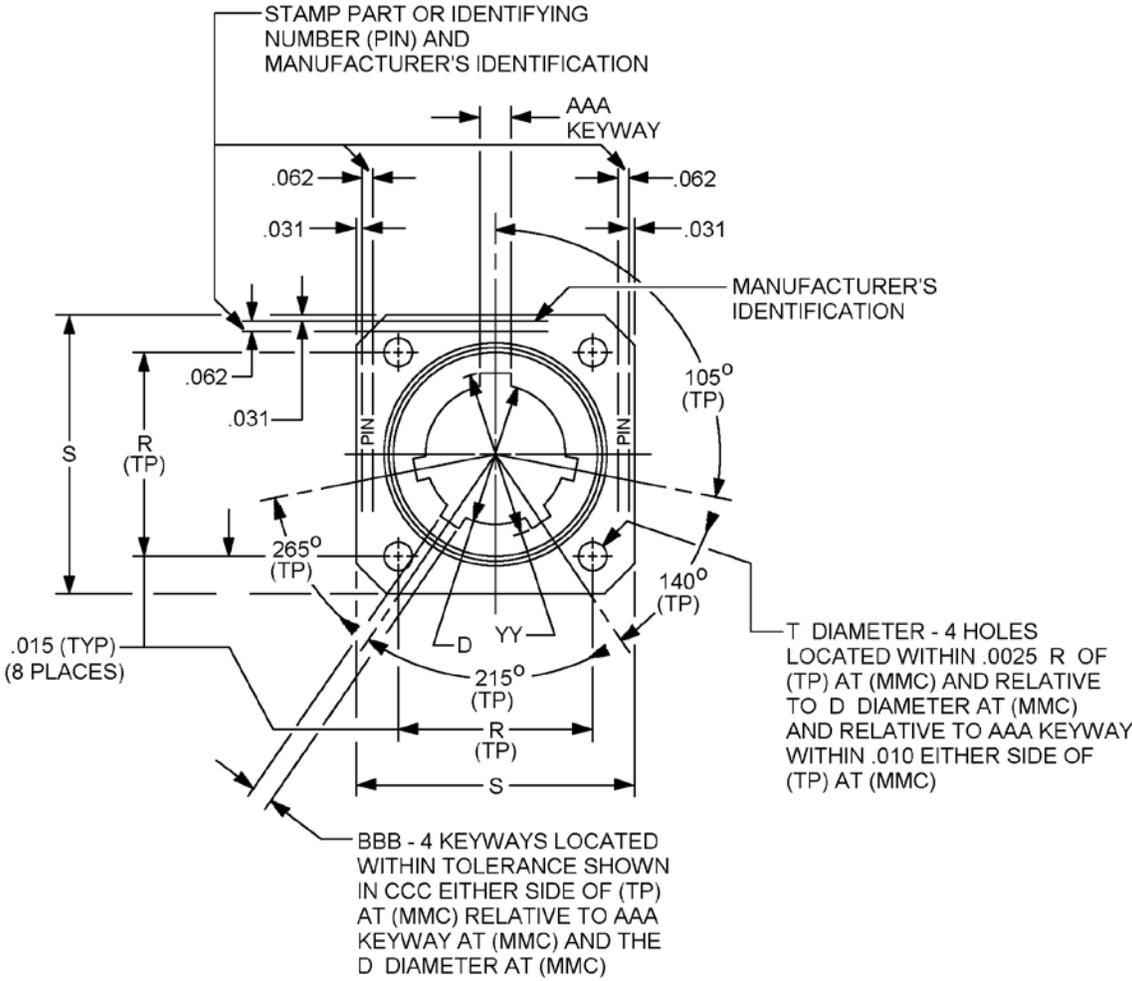


FIGURE 1. Dimensions and configuration.

MS18062D

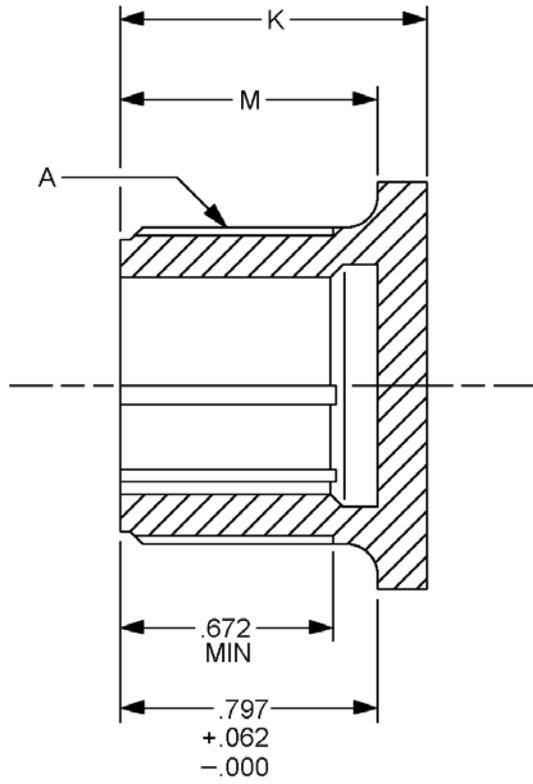


FIGURE 1. Dimensions and configuration - Continued.

MS18062D

Shell size	A Thread (plated) class 2A	D dia + .005 - .010	K + .021 - .010	M + .010 - .000	R (TP)
12	.8750-0.1P-0.2L-DS	.567	.938	.797	.906
14	1.0000-0.1P-0.2L-DS	.692			.969
16	1.1250-0.1P-0.2L-DS	.817			1.062
18	1.2500-0.1P-0.2L-DS	.942	.953		1.156
20	1.3750-0.1P-0.2L-DS	1.068			1.250
22	1.5000-0.1P-0.2L-DS	1.192			1.375
24	1.7500-0.1P-0.2L-DS	1.317	1.047	.859	1.562
28	2.0000-0.1P-0.2L-DS	1.536			1.750
32	2.2500-0.1P-0.2L-DS	1.786	1.110	.922	1.938
36	2.5000-0.1P-0.2L-DS	2.005			2.188
40	2.7500-0.1P-0.2L-DS	2.255			2.375

Shell size	S + .021 - .020	T dia ± .005	YY dia + .010 - .006	AAA	BBB	CCC
12	1.188	.150	.647	.126 +0.007 / -.001	.063 +0.007 / -.001	.0035
14	1.281		.772			
16	1.375		.897			
18	1.500	.177	1.022	.182 +0.010 / -.001	.108 +0.010 / -.001	.0070
20	1.625		1.148			
22	1.750		1.272			
24	2.000		1.473			
28	2.250	1.692	.260 +0.010 / -.001	.155 +0.010 / -.001		
32	2.500	1.942				
36	2.750	2.161				
40	3.000	.209	2.411			

FIGURE 1. Dimensions and configuration - Continued.

MS18062D

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.0254	.692	17.577	1.156	29.362	2.005	50.93
.0035	0.089	.772	19.609	1.188	30.175	2.161	54.89
.005	0.127	.797	20.244	1.192	30.277	2.188	55.575
.006	0.152	.817	20.752	1.250	31.75	2.250	57.15
.0070	0.178	.859	21.819	1.272	32.309	2.255	57.277
.010	0.254	.8750	22.225	1.281	32.537	2.375	60.325
.016	0.406	.897	22.784	1.317	33.452	2.411	61.239
.020	0.508	.906	23.012	1.375	34.925	2.500	63.50
.021	0.533	.922	23.419	1.473	37.414	2.750	69.85
.031	0.787	.938	23.825	1.500	38.10	3.000	76.20
.062	1.575	.942	23.927	1.536	39.014		
.063	1.600	.953	24.206	1.562	39.675		
.108	2.743	.969	24.613	1.625	41.275		
.126	3.200	1.0000	25.4	1.692	42.977		
.150	3.81	1.022	25.959	1.750	44.45		
.155	3.94	1.047	26.594	1.786	45.364		
.177	4.496	1.062	26.975	1.938	49.225		
.182	4.623	1.068	27.127	1.942	49.327		
.209	5.31	1.110	28.194	2.000	50.80		
.260	6.604	1.1250	28.575				
.567	14.402	1.148	29.159				
.647	16.434						
.672	17.069						

NOTES:

1. All dimensions are in inches. Metric equivalents are given for information only.
2. Unless otherwise specified, tolerances are $\pm .016$ inch (0.41 mm).

FIGURE 1. Dimensions and configuration - Continued.

MS18062D


REQUIREMENTS:

Design and construction: See figure 1.

This dummy receptacle mates with plugs shown on MS17344.

Shell finish: See MIL-DTL-22922.

Part or Identifying Number (PIN) example:

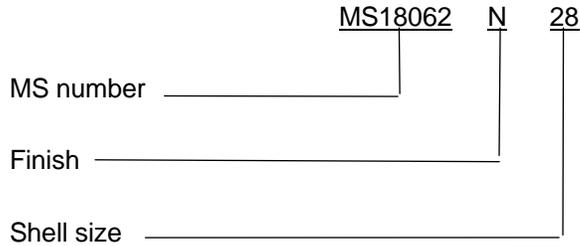

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-22992, this document references the following:

MS17344

CONCLUDING MATERIAL

Custodians:

- Army – CR
- Navy – EC
- Air Force - 85
- DLA – CC

Preparing activity:

DLA – CC

Review activities:

- Army – AV, MI
- Navy – AS, CG, MC, OS, SH
- Air Force - 19

(Project 5935–2012-187)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.