



DEFENSE LOGISTICS AGENCY  
LAND AND MARITIME  
P.O. BOX 3990  
COLUMBUS, OHIO 43218-3990

November 10, 2016

MEMORANDUM FOR MILITARY/INDUSTRY DISTRIBUTION

SUBJECT: Initial Draft(s) of: MIL-DTL-24308/1, /2, /3, /4  
Project Number(s): 5935-2017-027, -028, -029, -030

These initial draft(s) for these subject document(s), are now available for viewing and downloading from the DLA Land and Maritime-VA Web site:

<https://landandmaritimeapps.dla.mil/programs/milspec/default.aspx>

Major changes to these document(s) include: add passivated stainless steel as an optional shell finish.

Concurrence or comments are required at this Center within 45 days from the date of this letter. Late comments will be held for the next coordination of the document. Comments from military departments must be identified as either "Essential" or "Suggested". Essential comments must be justified with supporting data. Military review activities should forward comments to their custodians of this office, as applicable, in sufficient time to allow for consolidating the department reply. Lack of response to this draft will be construed as concurrence. **Since Navy-EC is the custodian for this document, all Navy review activities should forward their comments directly to this Center.**

If these document(s) are of interest to you, please provide your comments or suggested changes. The point of contact for this document is Mr. Wypasek, phone number 614-692-0530, facsimile transmission, 614-692-6939, e-mail [edmund.wypasek@dla.mil](mailto:edmund.wypasek@dla.mil), or may be mailed via the US Postal Service to DLA LAND AND MARITIME, ATTN: VAI (Attention: Ed Wypasek), P.O. Box 3990, Columbus, OH 43218-3990.

Sincerely,

*/ SIGNED /*

ABDONASSER M. ABDOUNI  
Chief,  
Interconnection Branch

cc:  
FMVA (Dave Barman)  
DSCC.Standardization@dla.mil

Note: This draft dated 10 November 2016, prepared by DLA Land and Maritime-VAI has not been approved and is subject to modification. DO NOT USE PRIOR TO APPROVAL. (Project 5935-2017-027)

INCH-POUND  
MIL-DTL-24308/1K  
w/AMENDMENT3  
DRAFT  
SUPERSEDING  
MIL-DTL-24308/1K  
w/AMENDMENT2  
1 April 2015

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE,  
POLARIZED SHELL, RACK AND PANEL, RECEPTACLE, SOCKET CONTACTS,  
GENERAL PURPOSE, CLASS D AND G, SOLDER TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24308.

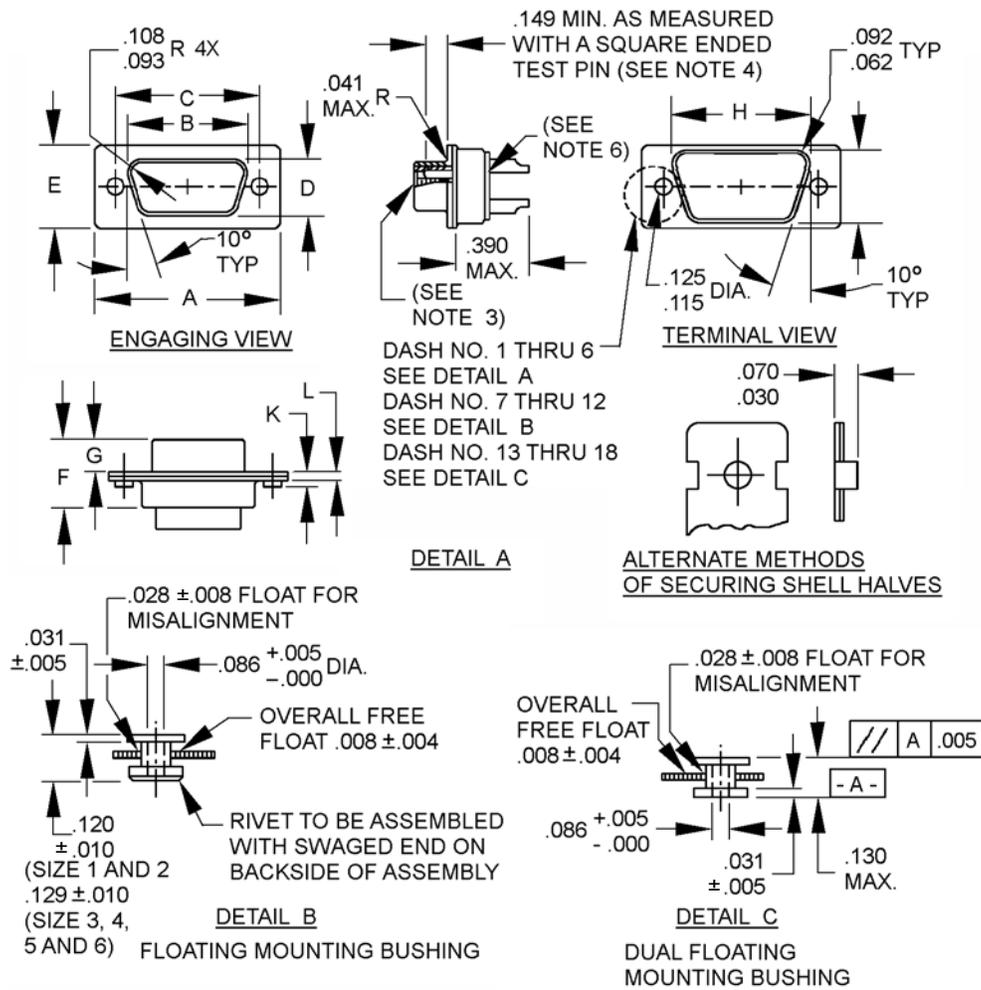


FIGURE 1. Shell, receptacle.



MIL-DTL-24308/1K  
w/AMENDMENT 3  
DRAFT DATED 10 NOVEMBER 2016

Detail (See note 7)	Shell size	Dimensions											
		A	B	C	D	E	F	G	H	J	K	L	
A	1	1.228	.648	.989	.316	.509	.439	.248	.769	.432	.060	.040	
		(31.19)	(16.46)	(25.12)	( 8.03)	(12.93)	(11.15)	(6.30)	(19.53)	(10.97)	(1.52)	(1.02)	
		1.198	.638	.979	.302	.479	.419	.238	.749	.412	.035	.020	
	2	(30.43)	(16.21)	(24.87)	( 7.67)	(12.17)	(10.64)	(6.05)	(19.02)	(10.46)	(.89)	(.51)	
		1.556	.976	1.317	.316	.509	.439	.248	1.093	.432	.060	.040	
		(39.52)	(24.79)	(33.45)	( 8.03)	(12.93)	(11.15)	(6.30)	(27.76)	(10.97)	(1.52)	(1.02)	
	3	1.526	.966	1.307	.302	.479	.419	.238	1.073	.412	.035	.020	
		(38.76)	(24.53)	(33.20)	( 7.67)	(12.17)	(10.64)	(6.05)	(27.25)	(10.46)	(.89)	(.51)	
		2.103	1.516	1.857	.316	.509	.439	.248	1.635	.432	.060	.040	
	4	(53.42)	(38.51)	(47.17)	( 8.03)	(12.93)	(11.15)	(6.30)	(41.53)	(10.97)	(1.52)	(1.02)	
		2.073	1.506	1.847	.302	.479	.419	.238	1.615	.412	.035	.020	
		(52.65)	(38.25)	(46.91)	( 7.67)	(12.17)	(10.64)	(6.05)	(41.02)	(10.46)	(.89)	(.51)	
	5	2.744	2.164	2.505	.316	.509	.439	.248	2.282	.432	.060	.040	
		(69.70)	(54.97)	(63.63)	( 8.03)	(12.93)	(11.15)	(6.30)	(57.96)	(10.97)	(1.52)	(1.02)	
		2.714	2.154	2.495	.302	.479	.419	.238	2.262	.412	.035	.020	
B (See note 8)	1	(68.94)	(54.71)	(63.37)	( 7.67)	(12.17)	(10.64)	(6.05)	57.45	(10.46)	(.89)	(.51)	
		2.650	2.069	2.411	.428	.620	.439	.248	2.188	.544	.060	.040	
		(67.31)	(52.55)	(61.24)	(10.87)	(15.75)	(11.15)	(6.30)	(55.58)	(13.82)	(1.52)	(1.02)	
C	1	2.620	2.059	2.401	.418	.590	.419	.238	2.168	.524	.035	.020	
		(66.55)	(52.30)	(60.99)	(10.62)	(14.99)	(10.64)	(6.05)	(55.07)	(13.31)	(.89)	(.51)	
		2	Same as -1 except per detail B										
		3	Same as -3 except per detail B										
		4	Same as -4 except per detail B										
5	Same as -5 except per detail B												
C	1	Same as -1 except per detail C											
		2	Same as -2 except per detail C										
		3	Same as -3 except per detail C										
		4	Same as -4 except per detail C										
		5	Same as -5 except per detail C										

FIGURE 1. Shell, receptacle - Continued.

MIL-DTL-24308/1K  
w/AMENDMENT 3  
DRAFT DATED 10 NOVEMBER 2016

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Accommodates a .040 (1.02mm) diameter pin.
4. Use .041/.039 (1.04/.99mm) diameter pin.
5. Copyright notice. All information disclosed in this military specification sheet which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the express permission of the copyright owner.
6. Indentation on the ends of the termination side of the shell, for the purpose of securing the insulator in the shell, is permitted. This may result in the "F" dimension being undersized in these areas. However, the "F" dimension shall be maintained for the remainder of the connector.
7. See table II for supersession data.
8. Detail B is inactive for new design, use detail C.

Inches	mm
.004	.10
.005	.13
.008	.20
.010	.25
.030	.76
.031	.79
.041	1.04
.062	1.57
.070	1.78
.086	2.18
.092	2.34
.097	2.46
.103	2.62
.115	2.92
.120	3.05
.125	3.18
.129	3.28
.149	3.78
.390	9.91

FIGURE 1. Shell, receptacle - Continued.

MIL-DTL-24308/1K  
w/AMENDMENT 3  
DRAFT DATED 10 NOVEMBER 2016

REQUIREMENTS:

The connectors shall conform to figure 1 of this specification and Appendix A and B of MIL-DTL-24308 as indicated in table I.

TABLE I. Design standards. <sup>1/</sup>

Part or Identifying Number (PIN) Class G	PIN Class D	Shell size	Shell detail (see figure 1)	Insert arrangement reference number <sup>3/</sup>	Contact Figure no. <sup>4/</sup>
M24308/1-1	M24308/1-34	1	A	A-1-1	B1
M24308/1-2	M24308/1-35	2	A	A-2-1	B1
M24308/1-3	M24308/1-36	3	A	A-3-1	B1
M24308/1-4	M24308/1-37	4	A	A-4-1	B1
M24308/1-5	M24308/1-38	5	A	A-5-1	B1
M24308/1-12 <sup>2/</sup>	M24308/1-45	1	B	A-1-1	B1
M24308/1-13 <sup>2/</sup>	M24308/1-46	2	B	A-2-1	B1
M24308/1-14 <sup>2/</sup>	M24308/1-47	3	B	A-3-1	B1
M24308/1-15 <sup>2/</sup>	M24308/1-48	4	B	A-4-1	B1
M24308/1-16 <sup>2/</sup>	M24308/1-49	5	B	A-5-1	B1
M24308/1-23	M24308/1-56	1	C	A-1-1	B1
M24308/1-24	M24308/1-57	2	C	A-2-1	B1
M24308/1-25	M24308/1-58	3	C	A-3-1	B1
M24308/1-26	M24308/1-59	4	C	A-4-1	B1
M24308/1-27	M24308/1-60	5	C	A-5-1	B1


<sup>1/</sup> These connectors mate with connectors specified in MIL-DTL-24308/3, MIL-DTL-24308/4, MIL-DTL-24308/9, and MIL-DTL-24308/24.

<sup>2/</sup> PINs M24308/1-12 through M24308/1-16 and M24308/1-45 through M24308/1-49 are inactive for new design, use M24308/1-23 through M24308/1-27 and M24308/1-56 through M24308/1-60.

<sup>3/</sup> For insert arrangement see MIL-DTL-24308, Appendix A.

<sup>4/</sup> For contact see MIL-DTL-24308, Appendix B.

PIN: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled from the code.

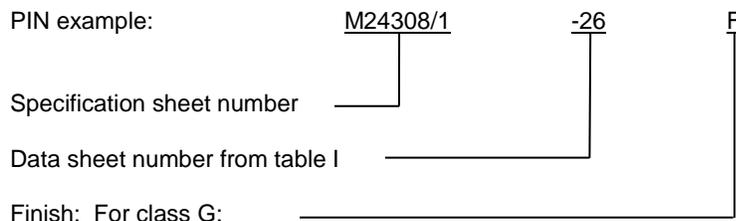

- A = Pure electrodeposited aluminum
- F = Cadmium
- K = Zinc nickel
- P = Passivated stainless steel**
- T = Nickel Fluorocarbon Polymer
- Z = Zinc

For class D: Class D connectors have a nickel finish, no suffix is required.

MIL-DTL-24308/1K  
w/AMENDMENT 3  
DRAFT DATED 10 NOVEMBER 2016

Supersession data: See table II.

TABLE II. Shell supersession data.

Shell detail (see figure 1)	Superseded MS sheet
Detail A	MS18269-1 through -5
Detail B	MS18269-7 through -11
Detail C	MS18269-13 through -17

Amendment notations. The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-24308, this document references the following:

MIL-DTL-24308/3  
MIL-DTL-24308/4  
MIL-DTL-24308/9  
MIL-DTL-24308/24

CONCLUDING MATERIAL

Custodians:  
Army - CR  
Navy - EC  
Air Force - 85  
NASA - NA  
DLA - CC

Preparing activity:  
DLA - CC  
  
(Project: 5935-2017-027)

Review activities:  
Army - AT, CR4, MI  
Navy - AS, CG, MC, SH  
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.