

INCH-POUND

MS3442C  
1 March 2007  
SUPERSEDING  
MS3442B  
31 July 1978


DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, WIDE FLANGE MOUNT,  
BAYONET COUPLING, SOLDER PIN CONTACT, CLASS H, SERIES 2

Inactive for new design after 15 December 1998.

This specification is approved for use by all Departments and  
Agencies of the Department of Defense.



The requirements for acquiring the product described herein  
shall consist of this specification sheet and MIL-DTL-26482.

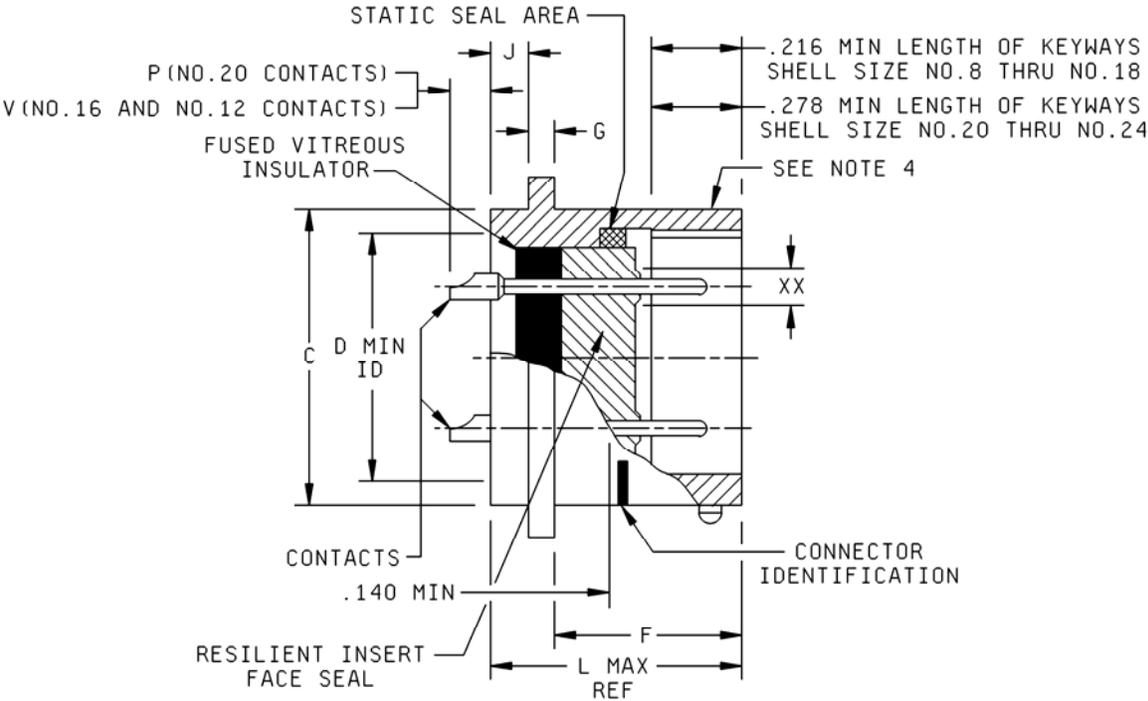

NOTE: For "XX", see note 5 and table I for contact cavities requiring reduced dimensions.

FIGURE 1. Receptacle, class H, dimensions and configurations.



MS3442C

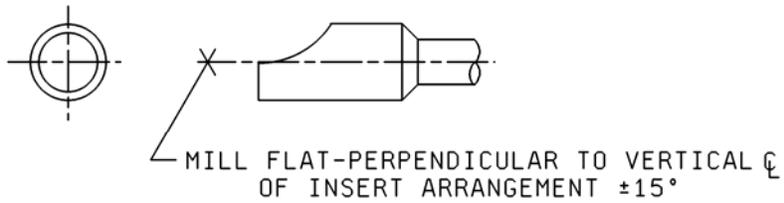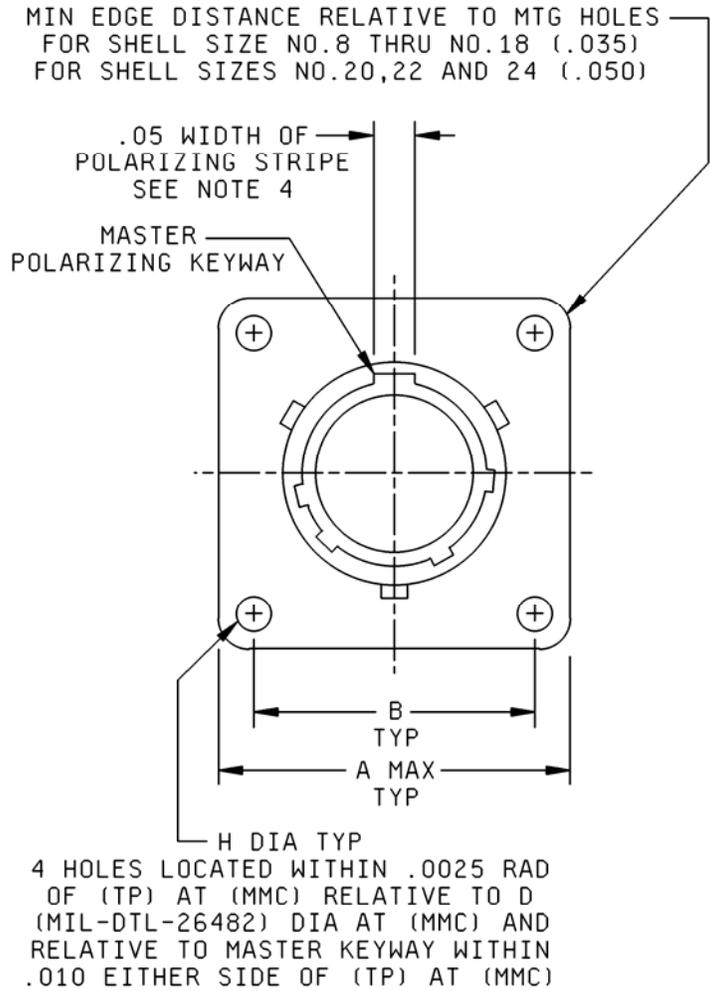


SOLDER POT ORIENTATION

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.


MS3442C

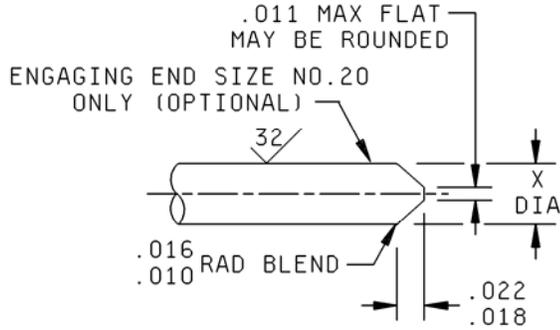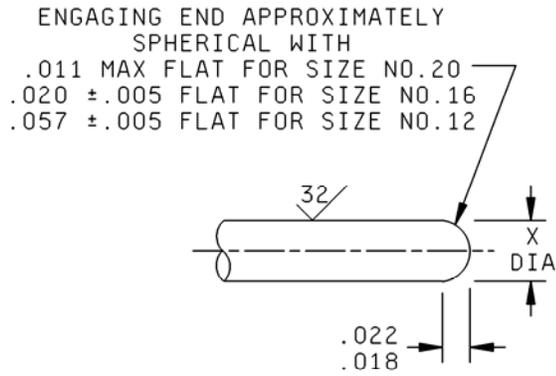

ENGAGING END OF CONTACT

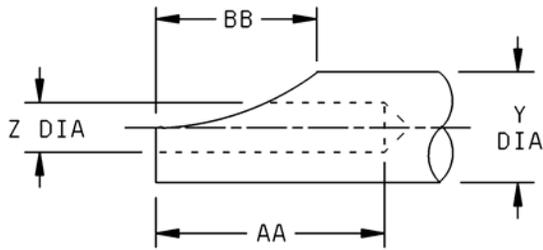

TERMINATION END OF CONTACTS

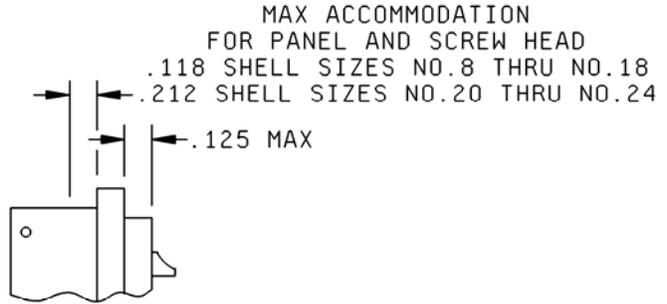

MAX PANEL THICKNESS (TYP)

Contact size	X	Y	Z	AA	BB
20	.041 (1.04)	.088 (2.24)	.048 (1.22)	.188 (4.78)	.110 (2.79)
	.039 (0.99)	.061 (1.55)	.042 (1.07)	.109 (2.77)	.068 (1.73)
16	.0635 (1.61)	.116 (2.95)	.075 (1.91)	.251 (6.38)	.141 (3.58)
	.0615 (1.56)	.096 (2.44)	.069 (1.75)	.172 (4.37)	.109 (2.77)
12	.095 (2.41)	.150 (3.81)	.122 (3.10)	.251 (6.38)	.141 (3.58)
	.093 (2.36)	.130 (3.30)	.112 (2.84)	.172 (4.37)	.109 (2.77)

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

## MS3442C

Shell size	A	B	C	D	F	G
8	1.065 (27.05)	.734 (18.64)	.563 (14.30) .557 (14.15)	.403 (10.24)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
10	1.141 (28.98)	.812 (20.62)	.673 (17.09) .667 (16.94)	.515 (13.08)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
12	1.266 (32.16)	.938 (23.83)	.782 (19.86) .776 (19.71)	.630 (16.00)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
14	1.360 (34.54)	1.031 (26.19)	.907 (23.04) .901 (22.89)	.755 (19.18)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
16	1.453 (36.91)	1.125 (28.58)	1.032 (26.21) 1.026 (26.06)	.880 (22.35)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
18	1.532 (38.91)	1.203 (30.56)	1.157 (29.39) 1.151 (29.24)	.980 (24.89)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
20	1.688 (42.88)	1.297 (32.94)	1.251 (31.78) 1.245 (31.62)	1.105 (28.07)	.660 (16.76) .640 (16.26)	.110 (2.79) .078 (1.98)
22	1.766 (44.86)	1.375 (34.93)	1.376 (34.95) 1.370 (34.80)	1.230 (31.24)	.660 (16.76) .640 (16.26)	.110 (2.79) .078 (1.98)
24	1.891 (48.03)	1.500 (38.10)	1.501 (38.13) 1.495 (37.97)	1.385 (35.18)	.660 (16.76) .640 (16.26)	.110 (2.79) .078 (1.98)

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

MS3442C

Shell size	H	J	L	P	V	Panel cutout dia
8	.150 (3.81)	.125 (3.18) .105 (2.67)	.801 (20.35)	.178 (4.52) .118 (3.00)	.248 (6.30) .188 (4.78)	.570 (14.48)
10						.680 (17.27)
12						.789 (20.04)
14						.914 (23.22)
16						1.039 (26.39)
18						1.164 (29.57)
20		.093 (2.36) .073 (1.85)	.863 (21.92)			1.258 (31.95)
22		.125 (3.18) .105 (2.67)	.895 (22.73)	.146 (3.71) .086 (2.18)	.216 (5.49) .156 (3.96)	1.383 (35.13)
24		1.508 (38.30)				

	Inches	mm	Inches	mm
	.0025	0.064	.116	2.95
	.005	0.13	.125	3.17
	.010	0.25	.216	5.49
	.011	0.28	.248	6.30
	.016	0.41		
	.018	0.46		
	.020	0.51		
	.022	0.56		
	.057	1.45		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Dimensional tolerances are .XX ± .01, .XXX ± .005. Angular tolerances are X° ± 1°.
4. Polarizing stripes, color optional.
5. Insert arrangements requiring reduced diameters for raised seal barrier on outer row of contact cavities as indicated.
6. True position (TP) tolerances specified are in accordance with ASME Y14.5M.

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

MS3442C

TABLE I. Contact cavities requiring reduced diameters (XX) for pins and sockets in outer row of contact cavities. <sup>1/</sup>

Shell size	Insert arrangement	Contact cavities
8	-33 & -98	A, B, C.
12	-10	C, G.
14	-12	A, B, C, D, E, F, G, H.
14	-18	A, C, E, G, J, L.
14	-19	B, D, F, H, K, M.
16	-26	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R.
18	-32	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T.
22	-41	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y.

<sup>1/</sup> The reduced diameter "XX" refers to the diameters of the raised seal barriers (pin barrier rings) or lead-in chamfers (socket entry holes) to ensure proper sealing of pin and socket after mating. See MIL-DTL-26482, connector intermateability control dimensions (series 1 and series 2) figure for reduced diameter "XX" for contact size 20 only.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Connector mating: This connector mates with MS3475 and MS3476.

For insert arrangement: See MIL-STD-1669.

Intermateability dimensions are in accordance with MIL-DTL-26482.

Material:

Shell types A and B, 300 series stainless steel in accordance with ASTM A582 and ASTM A276.

Shell type C, cold rolled steel in accordance with ASTM A108.


Finish:

Shell types A and B, passivated in accordance with ASTM A967.

Shell type C, .0001 inch (2.54 µm) tin minimum in accordance with ASTM B545 or ASTM B339 over nickel in accordance with SAE AMS-QQ-N-290.

MS3442C

Part or Identifying Number (PIN) example:

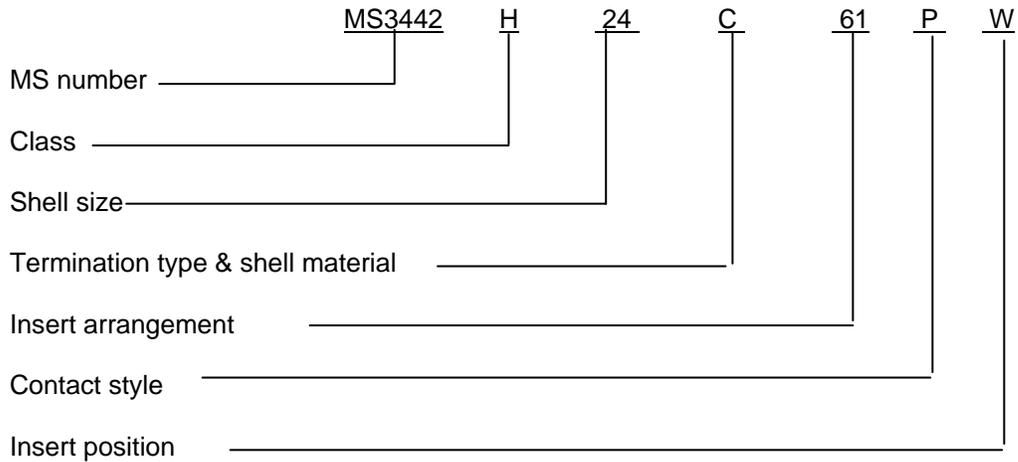

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

- MS3475
- MS3476
- MIL-STD-1669
- ASME Y14.5M
- ASTM A108
- ASTM B339
- ASTM B545
- SAE AMS-QQ-N-290

CONCLUDING MATERIAL

Custodians:  
Army – CR  
Navy – AS  
Air Force – 11  
DLA – CC

Preparing activity:  
DLA – CC  
(Project 5935-4656-009)

Review activities:  
Army – AV  
Navy – EC, SH  
Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.