

INCH-POUND  
MIL-DTL-2726/58B  
31 August 2005  
SUPERSEDING  
MIL-R-2726/58A(SH)  
3 July 1986

DETAIL SPECIFICATION SHEET

RECEPTACLE, ELECTRICAL, 4-PIN GROUNDED, 10-AMPERE,  
450-VOLT, 60-HERTZ, ALTERNATING CURRENT (SYMBOL NO. 1263)

Inactive for new design after 28 June 1999.

This specification is approved for use by all  
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this  
specification sheet and MIL-DTL-2726.


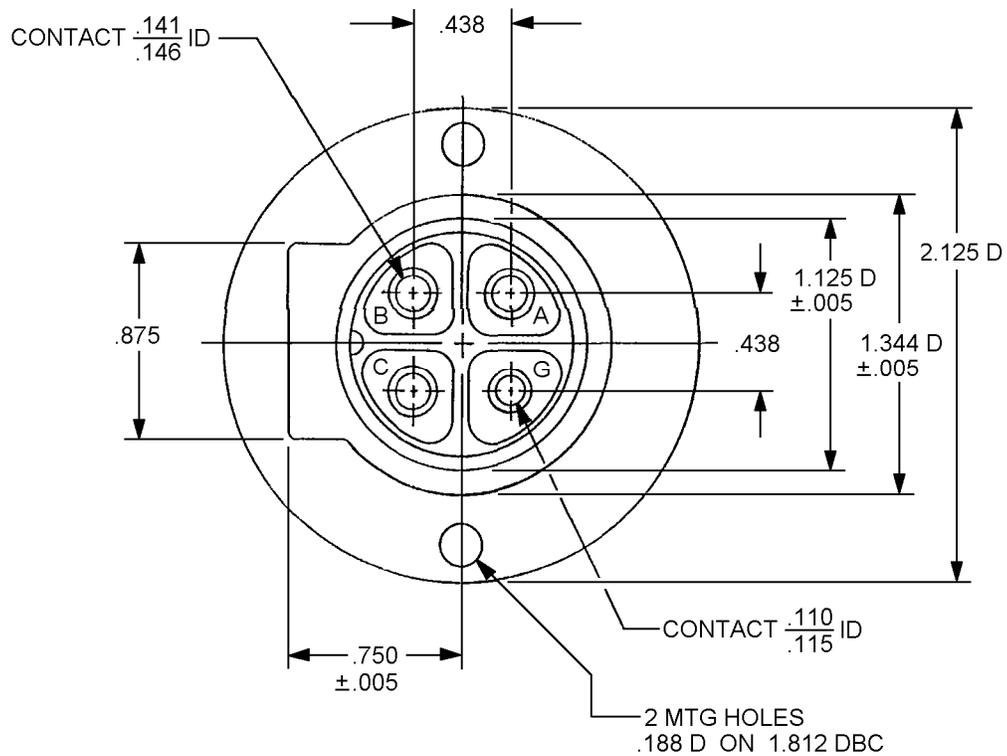


FIGURE 1. Dimensions and configurations.

MIL-DTL-2726/58B

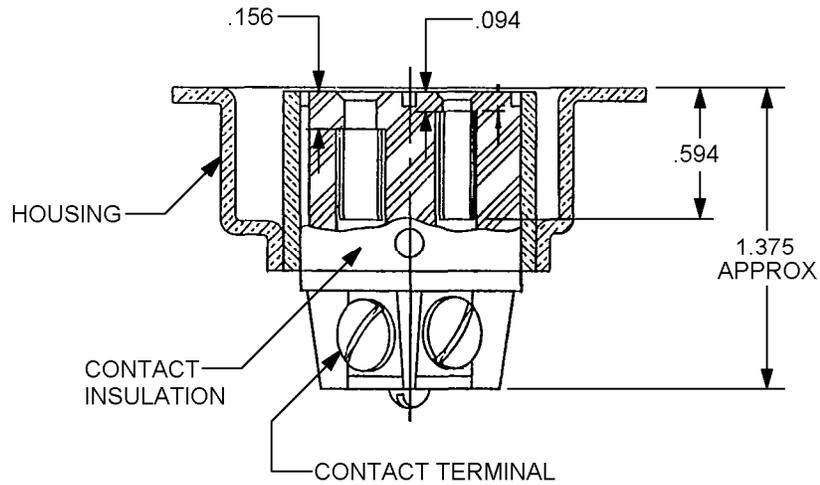

Inches	mm
.005	0.13
.094	2.39
.110	2.79
.115	2.92
.141	3.58
.146	3.71
.156	3.96
.188	4.78
.438	11.13
.594	15.09
.750	19.05
.875	22.23
1.125	28.56
1.344	34.14
1.375	34.93
1.812	46.02
2.125	53.98

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are  $\pm .016$  (0.41mm) and  $\pm 0^{\circ}30'$  on angles.

FIGURE 1. Dimensions and configurations - Continued.

MIL-DTL-2726/58B

REQUIREMENTS

Dimensions and configurations: See figure 1.

Effectiveness of enclosure: Watertight in accordance with MIL-STD-108 when mounted in a suitable enclosure.

Material: Housing – optional – polyimide (nylon) or metal.  
Contact insulation – in accordance with type MAI-60 of ASTM-D5948

Contact hardness: Minimum of Rockwell 80F.

Mating Plug: MIL-DTL-2726/53, Part or Identifying Number (PIN): M2726/53-001 (not furnished).

Design: Plastic housing and insulation may be a one-piece molded unit.

PIN: M2726/58-001.

Electrical rating: 10-ampere, 450-volt, alternating current, 60-hertz.

VERIFICATION

Verification shall be as specified in MIL-DTL-2726 and table I herein. The first article and conformance inspections shall consist of the inspections as specified in table I, in the order shown.

TABLE I. First article and conformance inspection.

Inspection	First article	Conformance
Examination	X	X
Insulation resistance	X	X
Dielectric withstanding voltage	X	X
Contact resistance	X	X
Endurance	X	
Salt spray	X	
Contact resistance	X	
Current load	X	
Vibration	X	
Shock	X	
Effectiveness of enclosure	X	X
Dielectric withstanding voltage	X	
Rockwell hardness	X	

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MIL-DTL-2726/58B

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

ASTM-D5948  
MIL-DTL-2726/53  
MIL-STD-108

CONCLUDING MATERIAL

Custodians:  
Army - CR  
DLA - CC  
Navy - SH

Preparing activity:  
DLA - CC

(Project 5935-4752-000)

Review activities:  
Army - AV, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.