


DETAIL SPECIFICATION SHEET

FITTING, ADAPTER, 45° ELBOW, HYDRAULIC AND PNEUMATIC,  
37° FLARE, MALE TO ORFS BULKHEAD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-32460.

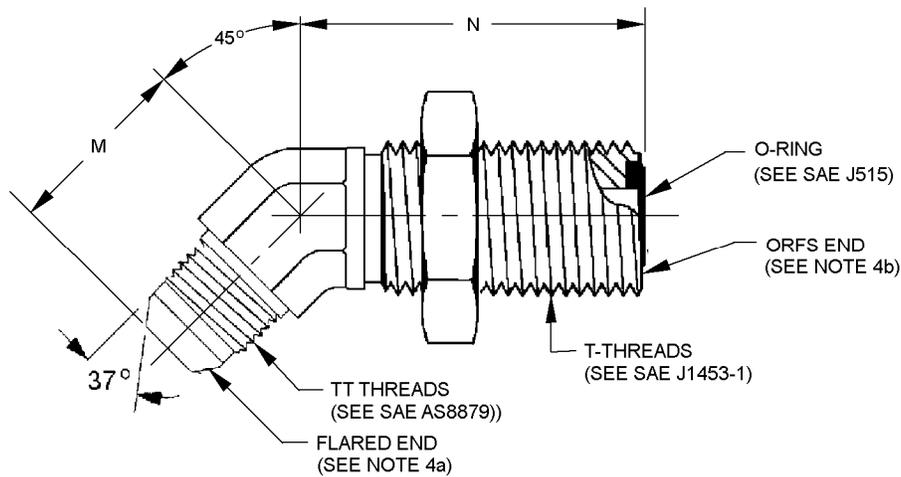

Dash size	Tube OD nom. inches (mm)	T ORFS SAE J1453-1	TT 37° flared SAE AS8879	M inches (mm) ±.04 (1.0)	N inches (mm) ±.04 (1.0)
-4	.2500 (6.350)	0.5625-18UNF-2A	.4375-20 UNJF-3A	.720 (18.29)	1.732 (44.00)
-6	.3750 (9.525)	0.6875-16UN-2A	.5000-20 UNJF-3A	.830 (21.08)	1.909 (48.50)
-8	.5000 (12.700)	0.8125-16UN-2A	.7500-16 UNJF-3A	.980 (24.89)	2.008 (51.00)
-10	.6250 (15.875)	1.0000-14UN-2A	.8750-14 UNJF-3A	1.110 (28.19)	2.224 (56.50)
-12	.7500 (19.050)	1.1875-12UN-2A	1.0625-12 UNJ-3A	1.280 (32.51)	2.382 (60.50)
-16	1.0000 (25.400)	1.4375-12UN-2A	1.3125-12 UNJ-3A	1.470 (37.34)	2.559 (65.00)
-20	1.2500 (31.750)	1.6875-12UN-2A	1.6250-12 UNJ-3A	1.590 (40.39)	2.638 (67.00)
-24	1.5000 (38.100)	2.0000-12UN-2A	1.8750-12 UNJ-3A	1.780 (45.21)	2.638 (67.00)

FIGURE 1. 45° elbow, 37° flared to bulkhead ORFS adapter.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Break all sharp edges and remove all burrs and slivers.
4. Dimensions and tolerances not shown shall be in accordance with the following:
  - a. SAE AS4395 style G for flared end.
  - b. SAE J1453-3\*520801\* for ORFS bulkhead.
  - c. SAE J514\*070302\* for body.

FIGURE 1. 45° elbow, 37° flared to bulkhead ORFS adapter - Continued.

REQUIREMENTS:

Fittings shall be as specified on figure 1 and in table I.

Materials and finishes shall be in accordance with MIL-DTL-32460.

Material and finish designators. Material and finish designators shall be as specified in table I. All platings shall be capable of meeting a minimum of 96 hours salt spray test in accordance with ASTM B117. The fittings shall show no evidence of corrosion after 96 hours of salt spray. Fluid passages, other openings, and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.

TABLE I. Material and chemical finish identification codes and chemical finish reference specifications. <sup>1/</sup>

Part or Identifying Number (PIN) code material/plating finish	Material	Plating finish
Blank		Cadmium plating in accordance with SAE AMS-C-81562, type II, class 3 or SAE AMS-QQ-P-416, type II, class 2. <sup>2/</sup>
CN	Steel	Cadmium plating in accordance with SAE AMS-C-81562, type II, class 3 or SAE AMS-QQ-P-416, type II, class 2 with NAVAIR trivalent chromium pretreatment (TCP) in accordance with MIL-DTL-81706, type II, class 1A.
E		NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A.
F	Steel	Zinc plate (finish J, P, or R) with NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A.
H	Steel	Aluminum-nickel in accordance with ASTM F1136/F1136M, grade 3, NC.
J	Steel	Zinc-nickel in accordance with SAE AMS2417, type 2, grade B.
M	Nickel-copper alloy UNS N04400	No additional finish.
N	High-chromium nickel alloy UNS N06690	No additional finish.
P	Steel	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 1.
R	Steel	Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 5. <sup>3/</sup>
S	Corrosion resistant steel	No additional finish. Passivation in accordance with SAE AMS2700, type 6 or 7.
T	Titanium <sup>4/</sup>	Anodize in accordance with SAE AMS2488 type 2.
TF		Fluoride phosphate in accordance with SAE AMS2486.
Z	Steel	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 5, or ASTM B695, type II, class 5.
ZN	Steel	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 5, or ASTM B695, type II, class 5 with NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A.

<sup>1/</sup> Materials and finishes shall be in accordance with MIL-DTL-32460.

<sup>2/</sup> Hydrogen embrittlement relief test need not be run.

<sup>3/</sup> Hexavalent chromium free.

<sup>4/</sup> Titanium shall not be used in oxygen systems.


Trivalent wrenchability. When the finish has been damaged due to poor wrenchability, the surface of the connector shall be touched up using the brush plating process below. The term "trivalent wrenchability" is used to evaluate the ability of the finish to withstand abrasion from an excessive amount of wrenching.

- a. Brush plating of hard chromium by electrodeposition shall be in accordance with SAE AMS2451/5.
- b. Brush plating of medium-hardness, low stress nickel by electrodeposition shall be in accordance with SAE AMS2451/9.
- c. Brush plating of NAVAIR TCP shall be in accordance with MIL-DTL-81706, type II, class 1A, material form 1 through 6, application method B. Example of a PIN: M817062A6B.

Maximum operating pressure. Maximum operating pressure shall be in accordance with MIL-DTL-32460.

MIL-DTL-32460/5

PIN: The PIN consists of the letter M, the basic specification number, the specification sheet number, a number for fitting size, and a letter for the material finish designator.

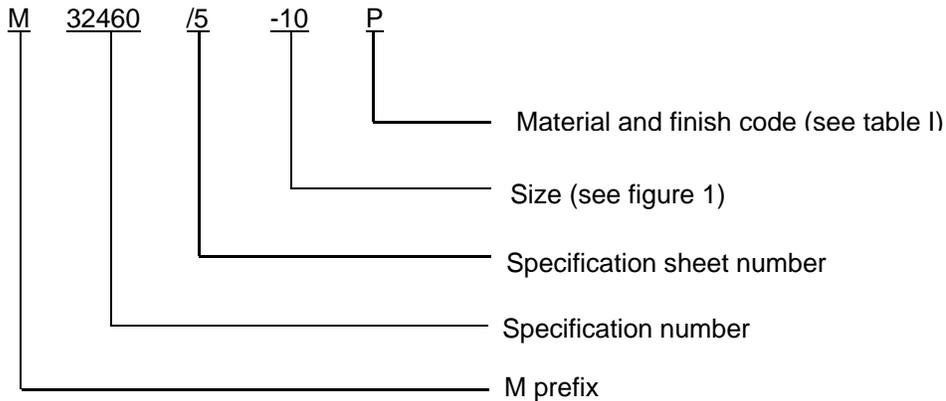

PIN example: M32460/5-10P indicates a 45°, male, adapter, .6250 inch (.1588 mm), steel with zinc phosphate finish.

O-ring is not supplied. Order separately, see SAE J515.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Referenced documents. In addition to MIL-DTL-32460, this document references the following:

MIL-DTL-16232	SAE AMS-QQ-P-416	SAE AS4395
MIL-DTL-81706	SAE AMS2417	SAE AS8879
ASTM B117	SAE AMS2451/5	SAE J515
ASTM B633	SAE AMS2451/9	SAE J1453-1
ASTM B695	SAE AMS2486	
ASTM F1136/F1136M	SAE AMS2488	
SAE AMS-C-81562	SAE AMS2700	

CONCLUDING MATERIAL

Custodians:

Army - AT  
Navy - AS  
Air Force - 99  
DLA - CC

Preparing activity:  
DLA - CC

(Project 4730-2012-060)

Review activities:

Army - AR  
Navy - CG, MC, SA, SH  
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.