

INCH POUND

MIL-DTL-3655/16B
w/AMENDMENT 2
18 March 2008
SUPERSEDING
AMENDMENT 1
1 November 1999

DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, CLASS I
(COAXIAL, SERIES TWIN, TWBNC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3655.

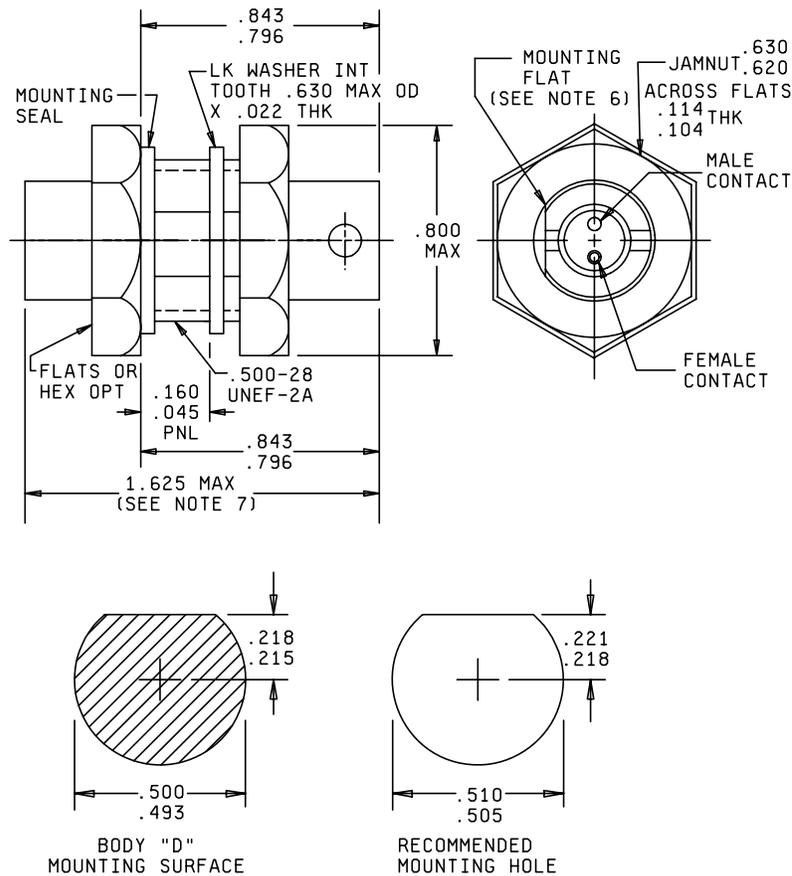


FIGURE 1. Type TWBNC, electrical receptacle connector.

MIL-DTL-3655/16B
w/AMENDMENT 2

Inches	mm	Inches	mm
.022	0.56	.505	12.83
.045	1.14	.510	12.95
.104	4.06	.620	15.75
.114	2.90	.630	16.00
.160	4.06	.796	20.22
.215	5.46	.800	20.32
.493	12.52	.843	21.41
.500	12.70	1.625	41.28

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Dimension .800 is the largest overall diameter of the connector.
4. Wrench flats are to accommodate standard wrench openings in accordance with FED-STD-H28 appendix 10.
5. All undimensioned pictorial configurations are for reference purpose only.
6. Dimensions define the maximum length of the connector when assembled to the appropriate cable.
7. Orientation of the body hex flats, mounting flats, bayonet stubs, contacts, and insulator shall be within $\pm 3^\circ$ of the orientation shown.

FIGURE 1. Type TWBNC, electrical receptacle connector – Continued.

ENGINEERING DATA

Nominal impedance: 78 ohms.

Frequency range: DC to 500 MHz, maximum.

Voltage rating: 500 V rms, maximum.

Mating connector: See MIL-DTL-3655/15.

Captive contact retention: 6 pounds, axial.

Intended use: Type MIL-DTL-3655/16 electrical connectors are intended for use with various types of twin axial radio frequency cables.

MIL-DTL-3655/16B
w/AMENDMENT 2

REQUIREMENTS:

Dimensions and construction: See figure 1 and MIL-STD-348.

Force to engage/disengage:

Torque: 2.5 inch-pounds, maximum.

Longitudinal force: 3 pounds, maximum.

Coupling proof torque: Not applicable.

Mating characteristics (see figure 1 and MIL-STD-348 for dimensions):

Inner contacts (sockets):

Oversize test pin: 0.042 inch diameter, minimum (nonclosed entry contacts only).

Test pin finish: 16 microinches.

Insertion depth: .093 inch, minimum.

Number of insertions: One.

Insertion force test:

Steel test pin diameter: .039 inch, minimum.

Test pin finish: 16 microinches.

Insertion depth: .093 inch, minimum.

Insertion force: 2 pounds, maximum.

Withdrawal force test:

Steel test pin diameter: .037 inch, maximum.

Test pin finish: 16 microinches.

Insertion depth: .093 inch, minimum.

Withdrawal force: 2 ounces, minimum.

Permeability: Applicable.

Hermetic seal: Not applicable.

Leakage: Not applicable.

Insulation resistance: 5×10^9 ohms, minimum.

Contact insulator captivation: Applicable; torque shall be 1 inch-pound.

Salt spray (corrosion): Applicable.

MIL-DTL-3655/16B
w/AMENDMENT 2

Connector durability: Applicable.

Contact resistance (milliohms, maximum):

	<u>Initial</u>	<u>After environment</u>
Inner conductor contacts:	3.0	4.2
Outer conductor contacts:	.4	Not applicable
Braid to body:	.2	Not applicable

Dielectric withstanding voltage: 1,500 V rms, minimum, at sea level.

Vibration, high frequency: Applicable.

Shock (specified pulse): Applicable.

Temperature cycling: Applicable.

Humidity: Applicable, but no measurement shall be made at high humidity. Insulation resistance shall be at least 2×10^8 ohms within 5 minutes after removal from the humidity chamber.

Cable retention force: 25 pounds, minimum.

Coupling nut retention: Applicable.

Part or Identifying Number (PIN): M3655/16 (See table I for dash numbers).

Connector PIN	Cable accommodation <u>1/</u>
M3655/16-0001	M17/45-RG108 and M17/186-00001
M3655/16-0002	M17/182-00001
M3655/16-0003	M17/182-00002

1/ The latest version of each cable shall apply.

MIL-DTL-3655/16B
w/AMENDMENT 2

First article shall apply as follows: First article test inspection shall be performed in accordance with the requirements outlined in the latest revision of MIL-DTL-3655.

Amendment notations. The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-3655, this document references the following:

MIL-STD-348
FED-STD-H28
MIL-DTL-3655/15

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-2007-027)

Review activities:

Army – AT, AV, MI
Navy – AS, MC, OS, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.