

INCH-POUND


MIL-DTL-39024/14C
 22 September 2008
 SUPERSEDING
 MIL-DTL-39024/14B
 3 February 2003

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE;
 SINGLE TEST POINT SUBMINIATURE (PUSH-IN), LOW VOLTAGE, .080

This specification is approved for use by all Departments
 and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
 shall consist of this specification sheet and MIL-DTL-39024.

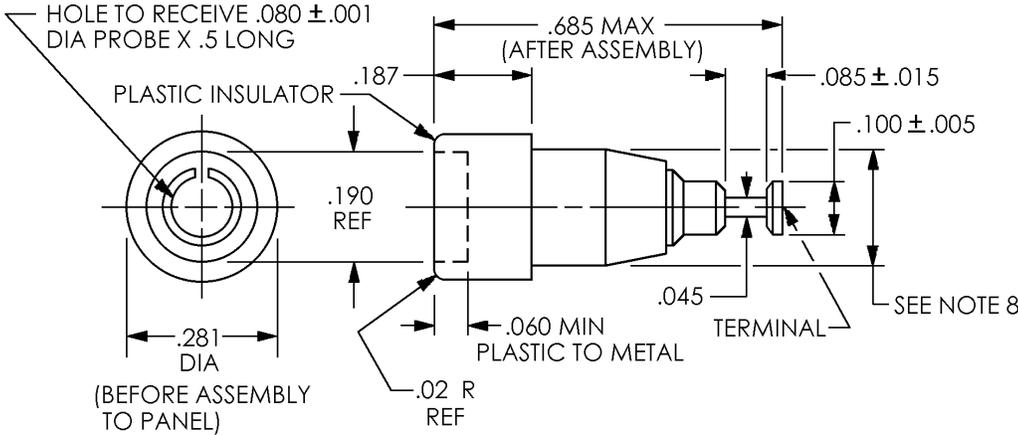

Inches	mm	Inches	mm
.001	0.03	.085	2.16
.005	0.13	.100	2.54
.015	0.38	.187	4.75
.02	0.5	.190	4.83
.045	1.14	.218	5.54
.060	1.52	.281	7.14
.080	2.03	.500	12.70
		.685	17.40

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only, and are based on 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ± .010 (0.25 mm).
4. Recommended mounting hole diameter $.218 \pm .001$ (5.54 ± 0.03 mm).
5. Range of acceptable panel thickness: .031 - .093 (0.79 – 2.36 mm).
6. Parts supplied unassembled.
7. All undimensioned pictorial configurations are for reference purpose only.
8. When unassembled, this dimension shall be $.218 \pm .005$ (5.54 ± 0.13 mm). When the terminal assembly and insulator are assembled, this dimension shall be .220 (5.59 mm) minimum.

FIGURE 1. Configuration and dimensions.

MIL-DTL-39024/14C

TABLE I. Design and identification data.

Dash number	Insulation		
	Material	Color	Number in accordance with FED-STD-595/
-01	L-P-410 or ASTM D4066	White	17875
-02		Red	11105
-03		Black	17038
-04		Brown	10075
-05		Green	14110
-06		Orange	12246
-07		Blue	15123
-08		Yellow	13655
-09		Gray	16187
-10		Purple	27144
-11		Natural	----
-12	ASTM D1710	White	17875
-13		Red	11105
-14		Black	17038
-15		Brown	10075
-16		Green	14110
-17		Orange	12246
-18		Blue	15123
-19		Yellow	13655
-20		Gray	16187
-21		Purple	27144
-22		Natural	----

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Insulation: Material shall be as specified in table I.

Socket contact and terminals: Material shall be as specified in MIL-DTL-39024.

Flammability: Dielectric materials shall be self-extinguishing in accordance with ASTM D635.

Terminals: Shall be capable of being wired with two no. 20 AWG wires. Configuration shall be specified on figure 1.

Test probe: 0.080 ± 0.001 inch in diameter and $\frac{1}{2}$ -inch (min) length. Test probe shall be engaged for a minimum of $\frac{1}{2}$ inch.

Contact current rating: 5 amperes (max).

Contact resistance: A test probe in accordance with MIL-DTL-39024 shall be fully inserted in the connector. With a current of 5 amperes, potential drop shall be measured between the connector terminal and the extreme end of the solder cup on the test probe. Measured values shall be within the limits specified in table II.

MIL-DTL-39024/14C

TABLE II. Potential drop (max) with 5 amperes of current.

Test	Before test	After test
Durability	6 mV	8 mV
Vibration	8 mV	10 mV
Salt spray (corrosion)	10 mV	15 mV

Dielectric withstanding voltage (at sea level):

Test voltage: 3,000 volts rms, 60 hertz, shall be applied to the insulating material for period of 15 seconds.

Insertion and withdrawal forces:

Insertion force: 5.0 pounds (max).
Withdrawal force: 0.4 pound (min).

Identification marking:

Part or Identifying Number (PIN): M39024/14-(dash number from table I).

Operating conditions:

Operating voltage: 2,000 volts rms, 60 hertz at sea level; 350 volts rms, 60 hertz at 80,000 feet.

The thickness of the panel on which these connectors may be used ranges from 0.031 to 0.093 inch; the diameter of the mounting hole is 0.218 ± 0.001 inch.

Qualification: Not applicable.

Conformance inspection. Groups A and B tests in accordance with MIL-DTL-39024 shall be applicable.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-39024, this document references the following:

ASTM D635	FED-STD-595/14110
ASTM D1710	FED-STD-595/15123
ASTM D4066	FED-STD-595/16187
FED-STD-595/10075	FED-STD-595/17038
FED-STD-595/11105	FED-STD-595/17875
FED-STD-595/12246	FED-STD-595/27144
FED-STD-595/13655	L-P-410

MIL-DTL-39024/14C

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-2008-047)

Review activities:

Army - AR, CR4, MI
Navy - AS, CG, MC, OS
Air Force – 19

NOTE: The activities listed above were interested in this document as of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.