

INCH-POUND

MS27229C
21 July 2015
SUPERSEDING
MS27229B
14 May 2007

DETAIL SPECIFICATION SHEET

FLANGE NIPPLE ASSEMBLY 45°, ADAPTER, HOSE TO TUBE,
REUSABLE, HYDRAULIC, FUEL AND OIL LINES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5070.

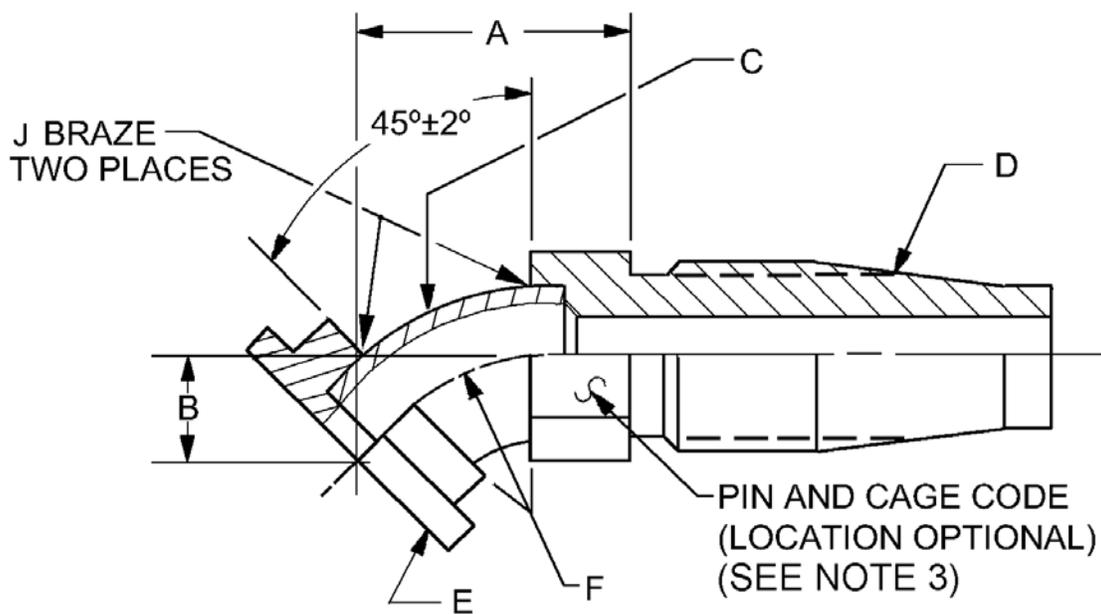


FIGURE 1. 45° flange nipple assembly dimensions and configuration.



MS27229C

| Dash number | A ±.035 inches (mm) | B ±.035 inches (mm) | C Elbow PIN | D Nipple PIN | E Shoulder PIN | F (ref) inches (mm) |
|-------------|------------------------------|------------------------------|-------------------|--------------------|----------------------|------------------------------|
| | | | MS27235 | MS27239 | MS27237 | |
| -8 | .921 (23.39) | .338 (8.59) | -8 | -8 | -8 | .50 (12.70) |
| -10 | 1.009 (25.63) | .375 (9.53) | -10 | -10 | -10 | .62 (15.75) |
| -12 | 1.194 (30.33) | .468 (11.89) | -12 | -12 | -12 | .84 (21.34) |
| -16 | 1.282 (32.56) | .505 (12.83) | -16 | -16 | -16 | .97 (24.64) |
| -20 | 1.561 (39.65) | .569 (14.45) | -20 | -20 | -20 | 1.19 (30.23) |
| -24 | 1.756 (44.60) | .624 (15.85) | -24 | -24 | -24 | 1.38 (35.05) |
| -32 | 2.084 (52.93) | .734 (18.64) | -32 | -32 | -32 | 1.75 (44.45) |
| -40 | 2.430 (61.72) | .825 (20.96) | -40 | -40 | -40 | 2.06 (52.32) |
| -48 | 2.732 (69.39) | .898 (22.81) | -48 | -48 | -48 | 2.31 (58.67) |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Part or Identifying Number (PIN).

FIGURE 1. 45° flange nipple assembly dimensions and configuration - Continued.

REQUIREMENTS:

Dimensions and configurations: The design, construction, and physical dimensions shall be in accordance with MIL-DTL-5070 and figure 1 in case of conflict between this drawing and MIL-DTL-5070, this drawing shall govern.

Intended use: This part is a component of MS27230.

Material: Aluminum shall be in accordance with MIL-DTL-5070.

Braze: Braze along joint J (see figure 1) in accordance with SAE-AMS2672.


Heat treatment: Heat treat in accordance with SAE-AMS2770, condition T6, after braze.

Finish: Finish in accordance with MIL-DTL-5070

Color identification: Color identification shall be in accordance with MIL-DTL-5070.

MS27229C

PIN example:

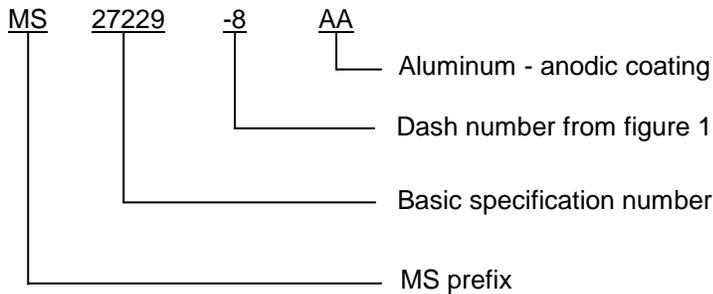

Identification of product. The PIN and the manufacturer's Commercial and Government Entity (CAGE) Code or trademark shall be permanently marked on the assembly, see figure 1, or on a removable tag securely attached to the assembly.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-5070, this document references the following:

- MS27230 SAE-AMS2770
- MS27235 SAE-AMS2672
- MS27237
- MS27239

CONCLUDING MATERIAL

Custodians:

- Army - AT
- Navy - AS
- Air Force - 99
- DLA - CC

Preparing activity:

DLA - CC

(Project 4730-2015-036)

Review activities:

- Army - AV
- Navy - MC, SA
- Air Force - 11, 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.