

INCH-POUND

MIL-DTL-83725/12B

6 September 2016

SUPERSEDING

MIL-R-83725/12A (USAF)

26 November 1986

DETAIL SPECIFICATION SHEET

RELAYS, VACUUM, SPDT, 12 AMPERES DC OR
60 Hz RMS, 3.6 KILOVOLTS PEAK

This specification is approved for use by the Department of Defense.

The complete requirements for acquiring the relays described
herein shall consist of this specification and [MIL-DTL-83725](#).


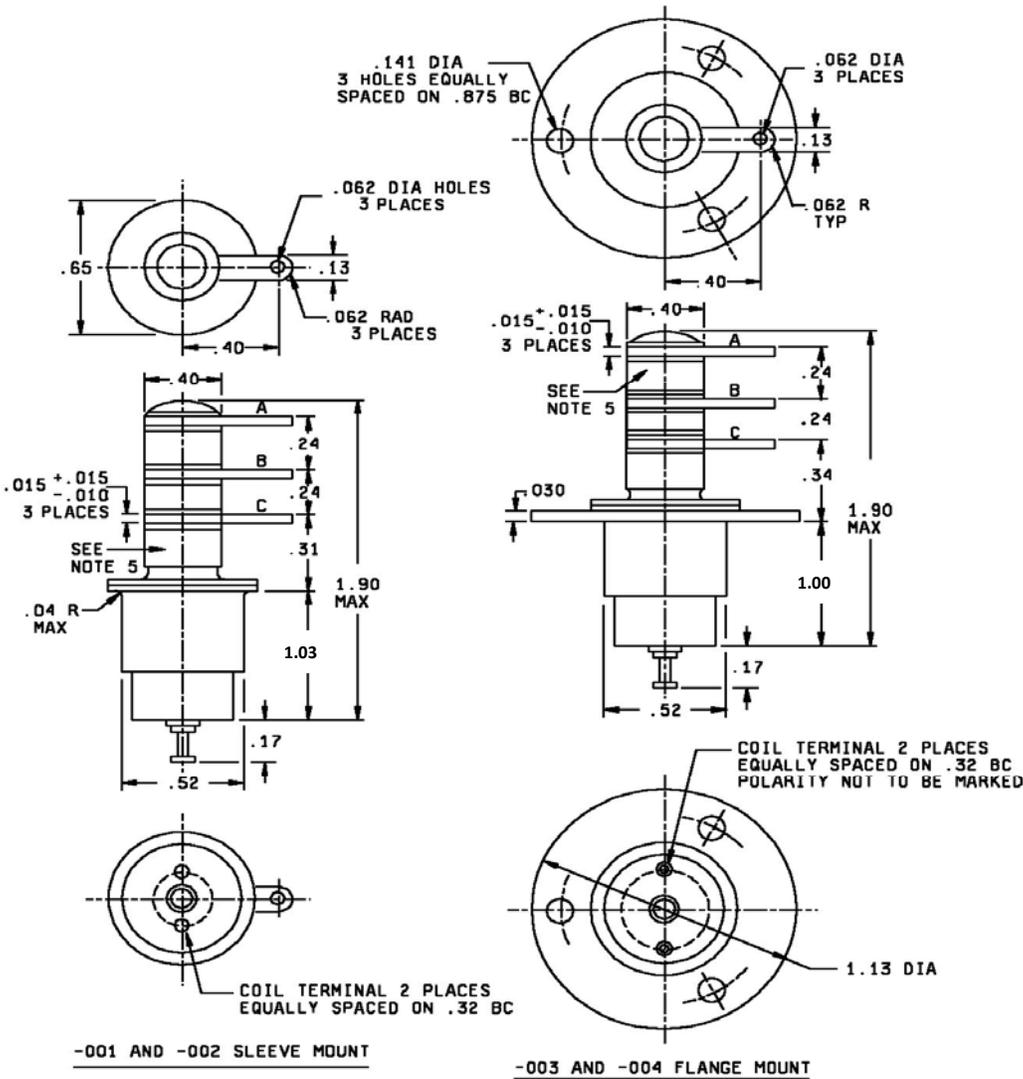


FIGURE 1. Relay, dimensions and configurations.



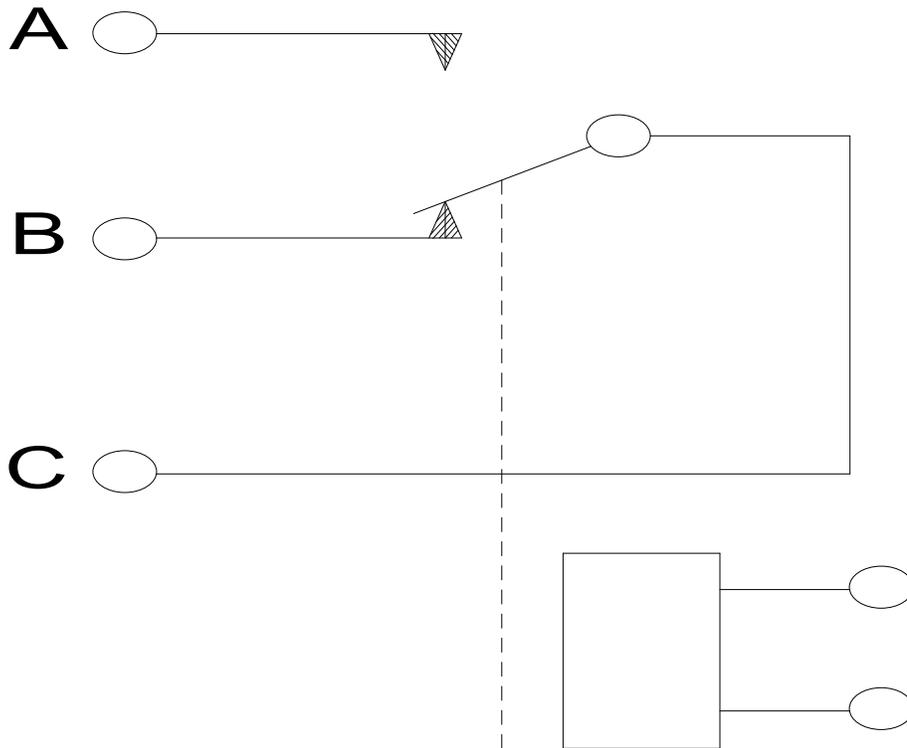

CIRCUIT DIAGRAM

Inches	mm	Inches	mm	Inches	mm
0.030	0.76	0.24	6.10	0.65	16.5
0.04	1.02	0.31	7.87	0.875	22.2
0.062	1.57	0.32	8.13	1.00	25.4
0.13	3.30	0.34	8.64	1.03	26.2
0.141	3.58	0.40	10.2	1.13	28.7
0.17	4.32	0.52	13.2	1.90	48.3

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.010 (0.25 mm) for three-place decimals and ± 0.03 (0.8 mm) for two-place decimals.
4. Shape of coil lug (solder) terminals optional; however, they must accommodate two no. 22 AWG wires.
5. Glazed finish on ceramic insulators is optional.
6. M83725/12-001 mounted by 0.52 inch (13.2 mm) diameter of body of coil housing or by 0.65 inch (16.5 mm) diameter lip in center of relay.

FIGURE 1. Relay, dimensions and configurations - Continued.

MIL-DTL-83725/12B

REQUIREMENTS:

Contact data:

Configuration: SPDT, ground isolated.

Arrangement: 1 form C.

Load ratings:

Resistive (carry only):

12 amperes dc or 60 Hz rms.

10 amperes rms, 2.5 MHz.

6 amperes rms, 16 MHz.

Rated operating voltage:

3.6 kilovolts peak, 60 Hz or dc.

3.6 kilovolts peak, 2.5 MHz.

3.2 kilovolts peak, 16 MHz.

Contact resistance:

Rated Life:

Before: .020 ohm, maximum.

During: .100 ohm, maximum.

After: .100 ohm, maximum.

Contact bounce: Not applicable.

Capacitance:

1.6 picofarads, maximum across open contacts.

1.6 picofarads, maximum between open contacts and ground.

Coil data:

Duty rating: Continuous.

Operate and release time: 10 milliseconds.

Nominal voltage:	12 V dc	<u>1/</u>	26.5 V dc	<u>2/</u>
Maximum voltage:	16 V dc	<u>1/</u>	32 V dc	<u>2/</u>
Pickup voltage:	11 V dc	<u>1/</u>	22 V dc	<u>2/</u>
Dropout voltage:	1 V dc	<u>1/</u>	1 V dc	<u>2/</u>
Coil resistance:	48 ohms ±10%	<u>1/</u>	290 ohms ±10%	<u>2/</u>

1/ Applicable to -001 and -003.

2/ Applicable to -002 and -004.

Electrical data:

Insulation resistance: 1,000 megohms, minimum, except the resistance between coil and housing at high temperature shall be 500 megohms or greater.

MIL-DTL-83725/12B

Dielectric withstanding voltage:

At atmospheric pressure: 60 Hz.

Between all mated contacts in the open position: 4 kV peak.

Between high voltage terminals and housing: 4 kV peak.

Between coil and housing: 500 V rms, 60 Hz.

Ground isolated: Ground isolated relays have operating elements insulated from the ground plane to provide absolute voltage isolation between the frame and the high voltage contacts.

Environmental data:

Temperature range: -55°C to +125°C.

Vibration: [MIL-STD-202-204](#), test condition C (10-55 Hz, .06 inch DA/55-2000 Hz, 10 g).

Shock: [MIL-STD-202-213](#), test condition J, 30 g, 11 milliseconds, half sine.

Physical:

Terminal strength: 5 pounds pull.

Dimensions and configuration: See [figure 1](#).

Termination: Solder terminal.

Weight: 1 ounce, maximum.

Life test requirements:

Mechanical cycling: 1,000,000 cycles. Two sample units (cycling rate, 36,000 per hour maximum; contact current shall not exceed 10 milliamperes).

Verification:

Dielectric withstanding voltage:

Tests to be conducted at atmospheric pressure rating only.

Duration of application: 5-10 seconds at a 10 percent increase in the dielectric withstanding voltage.

Part number: See [table I](#).

TABLE I. Part number and characteristics.

Military part number	Mount	Coil voltage
M83725/12-001	Sleeve	12 V dc
M83725/12-002	Sleeve	26.5 V dc
M83725/12-003	Flange	12 V dc
M83725/12-004	Flange	26.5 V dc

MIL-DTL-83725/12B

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to [MIL-DTL-83725](#), this document references the following:

[MIL-STD-202-204](#) [MIL-STD-202-213](#)

Custodians:
Army – CR
Navy – AS
Air Force - 85

Preparing activity:
DLA-CC

Review activities:
Air Force - 99
Navy-OS

(Project 5945-2016-031)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil/>.