

INCH POUND
MIL-PRF-1/592C
30 September 2009
SUPERSEDING
MIL-PRF-1/592B
9 February 1999

PERFORMANCE SPECIFICATION SHEET
ELECTRON TUBE, CATHODE RAY
TYPES 5BP1A AND 5HP1A

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein
shall consist of this document and the latest issue of MIL-PRF-1.

DESCRIPTION: Electrostatic deflection and focus.

DIMENSIONS AND PIN CONNECTIONS: See figure 1.

ABSOLUTE RATINGS:

Parameter:	Ef	Ec1	ed	Eb1	Eb2	Light output	Rg	Zd	Alt
Unit:	V	V dc	v	V dc	V dc	fL	MegΩ	MegΩ	ft
Maximum:	6.9	0	500	1,100	2,200	---	1.5	1.0	10,000
Minimum:	5.7	-125	---	---	1,500	2.0	---	---	---
Test conditions:	6.3	Adj	---	Focus	1,500	---	---	---	---

GENERAL:

Qualification - Required

MIL-PRF-1/592C

TABLE I. Testing and inspection.

Inspection	Method MIL-STD-1311	Notes	Conditions	Symbol	Limits Min	Limits Max	Units
<u>Qualification inspection</u>							
Neck and bulb alignment (electrostatic types)	5101	---		Diam	---	1.87	Inches
Cathode illumination	5216	---		---	---	---	---
Base material insulating quality	1216	---	Zone 5 (minimum)	---	---	---	---
Deflection factor uniformity	5248	---					
Direct-interelectrode capacitance	1331	---	Control grid to all	Cg1	---	12	pF
			D1 to D2	C1D2	---	3	pF
			D3 to D4	C3D4	---	3	pF
			D1 to all	CD1	---	15	pF
			D3 to all	CD3	---	15	pF
			D1 to all except D2	CD1	---	13	pF
			D2 to all except D1	CD2	---	13	pF
			D3 to all except D4	CD3	---	13	pF
D4 to all except D3	CD4	---	12	pF			
Pressure (implosion)	1141	---		---	---	---	---
Vibration	5111	---		Width	---	1.0	mm
<u>Conformance inspection, part 1</u>							
Voltage breakdown	5201	---		---	---	---	---
Voltage breakdown (electrostatic types)	5201	---		---	---	---	---
Gas "cross"	5206	1	Light = 2 fL	---	---	---	---
Bulb, screen and faceplate quality	5106	---		---	---	---	---
Light output	5221	1		Light	2.0	---	fL
Modulation	5223	---	Light = 2 fL	ΔE_c	---	35	V dc
Spot position (electrostatic deflection)	5231	---		---	---	15	mm
Spot displacement (leakage)	5231	---		Displ	---	10	mm
Grid cutoff voltage	5241			Ec1	-15	-45	V dc
Grid No. 1 leakage current	5251			---	---	---	---
Anode No. 2 leakage current	5251			---	---	---	---

See footnotes at end of table.

MIL-PRF-1/592C


TABLE I. Testing and inspection. -Continued

Inspection	Method MIL-STD-1311	Notes	Conditions	Symbol	Limits Min	Limits Max	Units
<u>Conformance inspection, part 2</u>							
Heater current	1301	---		If	540	660	mA
Electrode current (anode No. 1)	5201	---	Ec1 = 0	Ib1	-50	10	μA dc
Electrode current (cathode)	5201	---	Light = 2 fL	Ik	---	1,000	μA dc
Base alignment (electrostatic types)	5101	---	+3D4, pin No. 1	---	---	---	---
Angle between traces	5101	---		---	---	---	---
Neck and base alignment (electrostatic types)	5101	---		---	---	---	---
Stray light emission (conventional types)	5216	---	Eb2 = 2,200 V dc	---	---	---	---
Line width "A"	5226	2	Light = 2 fL	Width	---	0.65	mm
Line width "B"	5226	3	Light = 2 fL	Width	---	0.65	mm
Focusing voltage at cutoff	5246	---		Eb1	265	400	V dc
Focusing voltage (zero bias)	5246	---		Eb1	255	420	V dc
Deflection factor	5248	---	1D2	DF	53	72	V dc/in.
Deflection factor	5248	---	3D4	DF	48	66	V dc/in.
Secureness of base, cap or insert	1101	---		---	---	---	---
Base pin solder depth	1111	---		---	---	---	---
Permanence of marking	1105	---		---	---	---	---
<u>Conformance inspection, part 3</u>							
Life test	---	---	Group C; Light = 2 fL; Eb2 = 2,200 V dc; t = 500 hours (minimum)	---	---	---	---
Life-test end points:	---	---					
Line width "A"	5226	---		Width	---	0.70	mm
Line width "B"	5226	---		Width	---	1.0	mm
Modulation	5223	---		ΔEc	---	35	V dc

See footnotes at end of Table.

NOTES:

1. This test to be performed at the conclusion of the holding period.
2. The deflecting plates shall be returned to anode No. 2 through a minimum of 2.5 megohm resistors. The light output shall be set at 2 fL. The high frequency scanning shall be applied to the deflecting plates nearest the screen and the amplitude shall be adjusted to give a line length of approximately 90 percent of the maximum tube diameter. The low frequency scanning amplitude shall be expanded to approximately 90 percent of the maximum tube diameter in the direction perpendicular to the direction of high frequency scanning. Readjustment may be made for best overall focus.
 - (a) The tubes shall be observed for deflection defocusing, astigmatism or spot ellipticity observable to the eye as evidenced by fuzziness due to lack of sharpness of trace (usually around edges) bow-tying (irregular widths of any single line when observed at different points) bowing of trace other than that normally caused by curvature of bulb. This test for focus is to be made in addition to the line width measurements.
3. The same conditions shall be set up as described in note 2 except that the connection of deflecting elements to the low and high frequency scanning supplies shall be interchanged and the amplitudes adjusted to 90 percent of the maximum tube diameter in both directions without any adjustment of focus from note 2 conditions. An examination for defocusing, astigmatism or spot ellipticity shall be made as in note 2.

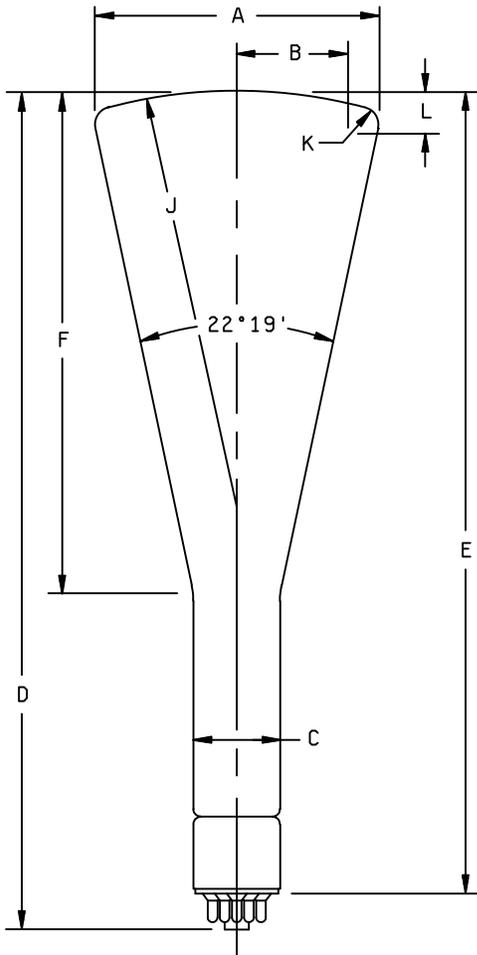

Ltr	Dimensions			
	Inches		Millimeter	
	Min	Max	Min	Max
Conformance inspection, part 2				
A	5.188	5.312	131.78	134.92
B	See note a			
C	1.562	1.688	39.67	42.88
D	16.375	17.125	415.93	434.98
Reference dimensions (see note 4)				
E	16.188		411.18	
F	10.250		260.35	
J	8.000 R		203.20 R	
K	.500 R		12.70 R	
L	.808		20.52	

NOTES:

1. The minimum useful screen radius shall not be less than 2.25 inches (57.15 mm).
2. The base for 5BP1A shall be a large wafer magnal 11-pin with medium straight sleeve (B11-35) type, or medium magnal 11-pin shell type (B11-66). The base for the 5HP1A shall be a large micanol-wafer magnal 11-pin with medium straight sleeve (B11-35) type, or medium magnal 11-pin low-loss shell type(B11-66).
3. The bulb shall be a J42C type.
4. Reference dimensions are for information only and are not required for inspection purposes.

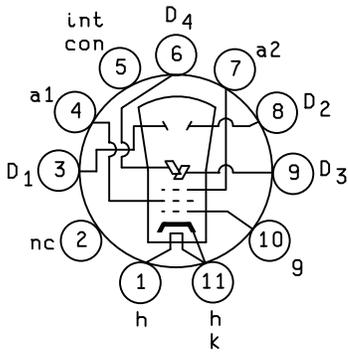


FIGURE 1. Outline drawing for electron tube types 5BP1A and 5BHP1A.

Referenced documents. In addition to MIL-PRF-1, this document references the following:
MIL-STD-1311

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:

DLA - CC

(Project 5960-2009-035)

Review activities:

Navy - AS, CG, MC, OS, SH
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil/>.