

INCH-POUND

MIL-PRF-10304/5G
w/AMENDMENT 2
28 August 2013
SUPERSEDING
MIL-PRF-10304/5G
w/AMENDMENT 1
18 January 2008

PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED:
AMMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 2.5 INCH), STYLE 26

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and
MIL-PRF-10304.

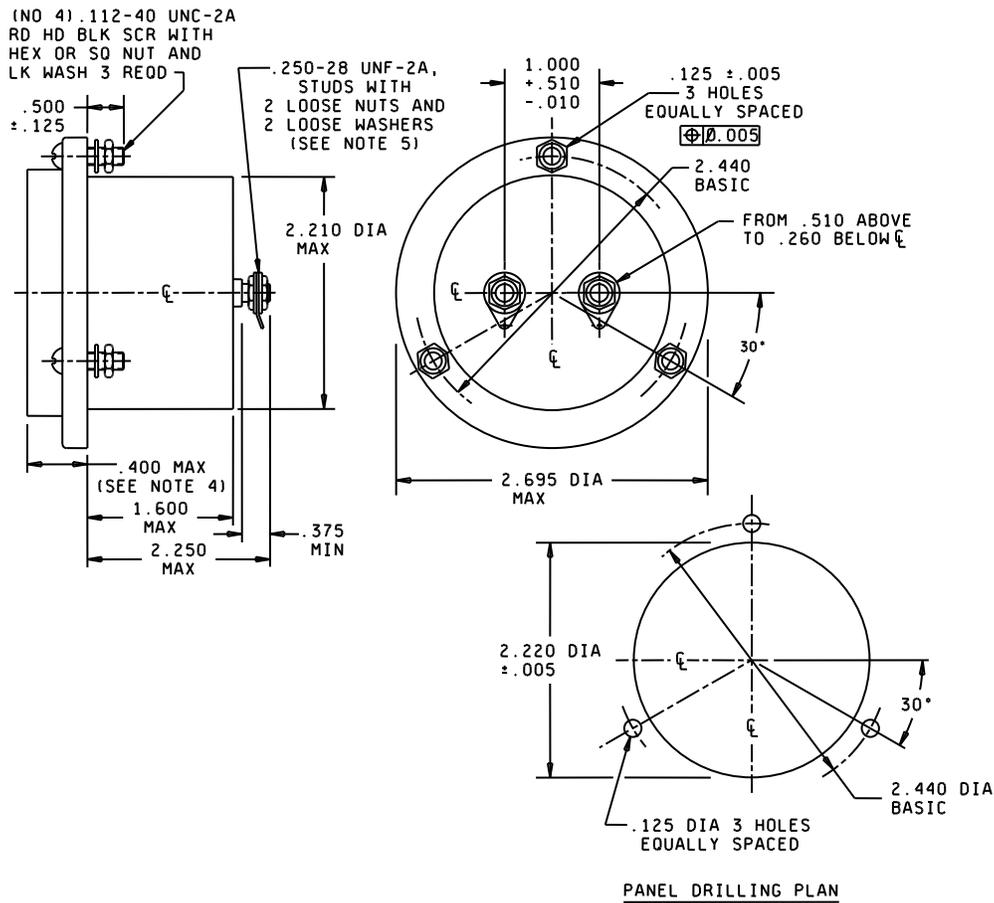


FIGURE 1. Meter, panel type.

MIL-PRF-10304/5G
w/AMENDMENT 2

Inches	mm	Inches	mm	Inches	mm
.005	.13	.375	9.53	2.210	56.13
.010	.25	.400	10.16	2.220	56.39
.112	2.84	.500	12.70	2.250	57.15
.125	3.18	.510	12.95	2.440	61.98
.250	6.35	1.000	25.40	2.695	68.45
.260	6.60	1.600	40.64		

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances are $\pm .015$ inch for two place (.XX), and $\pm .005$ inch for three place (.XXX) dimensions.
2. Tolerance is ± 0.5 ($\frac{1}{2}$) degree on angles.
3. Metric equivalents are given for general information only.
4. Maximum projection from front panel including mounting gaskets (if used).
5. Other forms of terminals, as specified in MIL-PRF-10304, are permitted. The specified minimum length applies to stud-type terminals only. Terminals shall be equally spaced, from each side of vertical centerline.

FIGURE 1. Meter, panel type – Continued.

REQUIREMENTS:

(Readings expressed as percent of full-scale value.)

Dimensions and configuration: See figure 1.

Full-scale ranges: See table I.

Scale:

Length: 1.5 inches minimum.

Pointer deflection: 10 degrees minimum.

Position influence: ± 2 percent change for 60 degrees rotation from normal operating position.

Accuracy: ± 2 percent.

Overshoot: 40 percent maximum.

Response time: 2 seconds maximum.

Power consumption (loss) (at end scale deflection):

Microammeters and milliammeters: 150 mV maximum.

Ammeters (self-contained): 75 mV maximum.

Ammeters (external shunt): 50 mV ± 2 percent with leads of 0.065 ± 0.010 ohms resistance.

High temperature cycling:

± 4 percent

± 2 percent permanent change.

Temperature influence: ± 1 percent change.

Exposure to extreme temperatures: ± 3 percent permanent change.

Overload capacity:

Momentary overload: ± 2 percent change.

Sustained overload:

± 1 percent temporary zero shift.

± 1 percent permanent zero shift.

MIL-PRF-10304/5G
w/AMENDMENT 2

± 2 percent permanent change.

Dielectric withstanding voltage: 3,000 volts rms.

Vibration, random drop, and shock: Repeatability not applicable for microammeters below 100 µA ranges.

TABLE I. Full-scale ranges.

Microamperes		Milliamperes		Amperes		Kiloamperes
Zero left	Zero center	Zero left	Zero center	Zero left	Zero center	
10	30-0-30	1	1-0-1	1	1-0-1	^{1/} 1.0
20	50-0-50	5	5-0-5	2	5-0-5	^{1/} 1.2
30	100-0-100	10	10-0-10	5	10-0-10	
50	300-0-300	50	50-0-50	10	^{1/} 10-0-30	
100	500-0-500	100	100-0-100	20	^{1/} 20-0-20	
200		200	500-0-500	30	^{1/} 30-0-30	
300		300		^{1/} 50		
500		500		^{1/} 100		
				^{1/} 200		
				^{1/} 300		
				^{1/} 500		

^{1/} Used with external shunt.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. This document references MIL-PRF-10304.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 99
DLA – CC

Preparing activity:
DLA – CC
(Project 6625-2013-004)

Review activities:
Army – AR, AT, AV, CR4, EA, MI
Navy – MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.