

INCH-POUND

MIL-PRF-15733/57D  
23 April 2009  
SUPERSEDING  
MIL-PRF-15733/57C  
28 May 2003

PERFORMANCE SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE,  
HERMETICALLY SEALED, STYLE FL62

Inactive for new design after 23 April 2009. Used for replacement purposes only. For new design use [MIL-PRF-28861/5](#); PIN M28861/05-005TB.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification sheet and [MIL-PRF-15733](#).

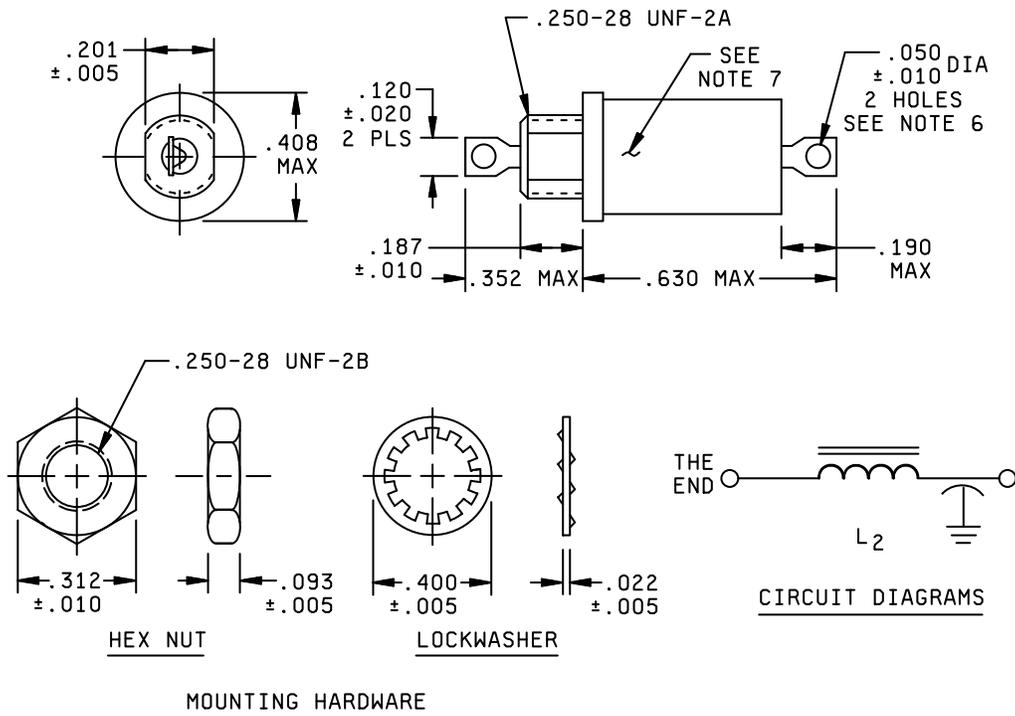


FIGURE 1. Case dimensions and circuit diagram.

MIL-PRF-15733/57D

Inches	mm
.005	0.13
.010	0.25
.020	0.51
.022	0.56
.050	1.27
.070	1.78
.093	2.36
.120	3.05
.187	4.75
.190	4.83
.201	5.11
.250	6.35
.312	7.92
.352	8.94
.400	10.16
.408	10.36
.630	16.00

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.
4. All filters shall be supplied with mounting hardware.
5. Use of style FL62 with or without shoulder is optional
6. Optional terminal hole  $.070 \pm .010$  inches or terminal slot  $.050 \pm .010 \times .070 \pm .010$  inches may be supplied.
7. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter with the symbol "L".

FIGURE 1. Case dimensions and circuit diagram - Continued.

MIL-PRF-15733/57D

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

\* Case and mounting hardware finish: In accordance with MIL-PRF-15733. Pure tin finish is prohibited as specified in MIL-PRF-15733.

Terminals: Solder lug.

Operating temperature range: -55°C to +125°C.

Rated voltage: 150 V dc at 125°C; 125 V ac, 400 hertz at 125°C.

Rated current: See table I.

Insertion loss: In accordance with MIL-PRF-15733 and table I.

TABLE I. Electrical characteristics.

Dash number	Maximum rated current (ampere)	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/													
		At +25°C							At -55°C and +125°C						
		100 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz	100 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0001	0.5	18	24	28	58	60	60	60	16	22	26	56	60	60	60

1/ Insertion loss measurements shall be made under full load over the frequency range of 100 kHz to 10 MHz. Insertion loss measurements above this frequency range shall be under no-load.

Seal: In accordance with MIL-PRF-15733.

Temperature rise: In accordance with MIL-PRF-15733; 25°C, maximum.

Dielectric withstanding voltage: In accordance with MIL-PRF-15733. The following exceptions shall apply:

Test temperature: 25°C.

Test voltage: 2.0 times the rated dc voltage applied between each terminal and ground, for a period of 1 to 5 seconds.

Barometric pressure (reduced): In accordance with MIL-PRF-15733 and method 105, MIL-STD-202; test condition C (70,000 ft). The following details apply:

Dielectric withstanding voltage: 125 percent of the rated dc voltage for 60 seconds.

Insulation resistance: In accordance with MIL-PRF-15733. The following details and exceptions shall apply:

Test temperature: 25°C.

Test potential: Rated dc voltage.

Maximum charging current: 150 milliamperes for 2 minutes.

Insulation resistance: Shall be not less than 1,000 megohms.

MIL-PRF-15733/57D

Voltage drop: .18 volt, maximum.

Overload: In accordance with [MIL-PRF-15733](#). After the filter has returned to room temperature, the insulation resistance and voltage drop measurements shall meet initial requirements.

Terminal strength: In accordance with [MIL-PRF-15733](#) and [method 211, MIL-STD-202](#); test condition A (pull).

Force: 5 pounds.

Salt atmosphere (corrosion): In accordance with [MIL-PRF-15733](#) and [method 101, MIL-STD-202](#); test condition A.

Shock (specified pulse): In accordance with [MIL-PRF-15733](#) and [method 213, MIL-STD-202](#); test condition I.

Vibration, high frequency: In accordance with [MIL-PRF-15733](#) and [method 204, MIL-STD-202](#); test condition B (15 g).

Life: In accordance with [MIL-PRF-15733](#) and [method 108, MIL-STD-202](#); test condition B (250 hours).

Part or Identifying Number (PIN): M15733/57-0001.

NOTES:

- \* Referenced documents: In addition to [MIL-PRF-15733](#), this specification sheet references the following documents:

- [MIL-PRF-28861/5](#)
  - [MIL-STD-202](#)
  - [MIL-STD-220](#)

- \* Changes from previous issue: The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations relationship to the last previous issue.

Custodians:  
Navy - EC  
Air Force - 85  
DLA - CC

Preparing activity:  
DLA - CC  
(Project 5915-2009-002)

- \* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.