


INCH-POUND

MIL-PRF-15733/66B  
4 June 2015  
SUPERSEDING  
MIL-PRF-15733/66A  
26 September 2003

PERFORMANCE SPECIFICATION SHEET  
FILTERS, RADIO FREQUENCY INTERFERENCE,  
STYLE FL50

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the filters described herein shall consist of this specification sheet and [MIL-PRF-15733](#).

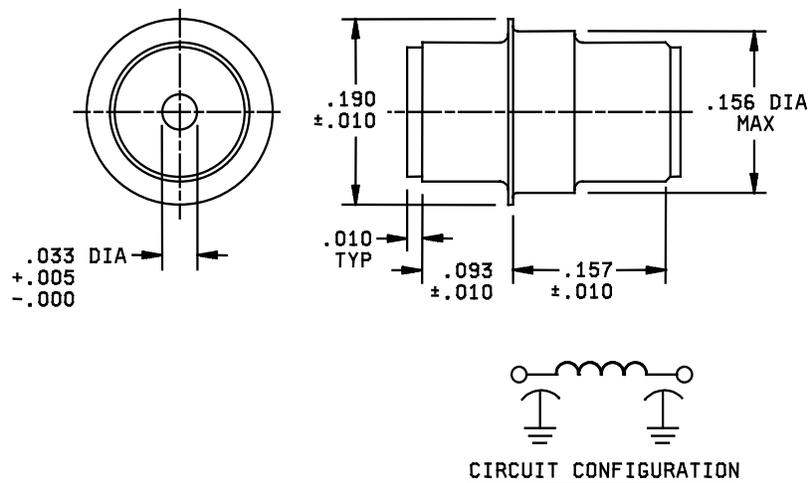

Inches	mm
.005	.13
.010	.25
.033	.84
.093	2.36
.156	3.96
.157	3.99
.190	4.83

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.
4. Suggested mounting hole is .160 (4.06 mm) diameter.

FIGURE 1. Case and circuit configuration.

AMSC N/A

FSC 5915



REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Not applicable (metallic mounting eyelet termination). Pure tin finish is prohibited.

Mounting termination: Solderable. Pure tin finish is prohibited.

Operating temperature range: -55°C to +125°C.

Rated voltage: 125 V dc over the operating temperature range.

Rated current: 10 amperes, dc.

Insertion loss: In accordance with MIL-PRF-15733 and table I.

TABLE I. Insertion loss requirements.

Minimum no load insertion loss at 25°C			
10 MHz	100 MHz	1 GHz	10 GHz
5	35	50	50

Seal: Not applicable.

Capacitance to ground: In accordance with [MIL-PRF-15733](#). The measured capacitance shall be 1750 pF minimum.

Dielectric withstanding voltage: In accordance with [MIL-PRF-15733](#). The following exception shall apply:

The test voltage shall be 2.5 x rated dc voltage and shall be applied for 5 ±1 seconds.

Insulation resistance: In accordance with [MIL-PRF-15733](#). Insulation resistance at +25°C shall be at least 1,000 megohms.

Voltage drop: Not applicable.

Overload: In accordance with [MIL-PRF-15733](#). The following exception shall apply:

After the test, insulation resistance only shall be measured at +25°C and shall meet initial requirements.

Terminal strength: Not applicable.

Resistance to solvents: Not applicable.

Salt atmosphere (corrosion): Not applicable.

Vibration (high frequency): In accordance with [MIL-PRF-15733](#) and [method 204, MIL-STD-202](#); test condition D (20 g).

Moisture resistance: Not applicable.

MIL-PRF-15733/66B

Life: In accordance with [MIL-PRF-15733](#) and [method 108, MIL-STD-202](#); test condition D.

Measurements after test shall be as specified except:

Insulation resistance shall not be less than 50 percent of the initial requirement.

Part or Identifying Number (PIN): M15733/66-0001.

Marking: Filters shall not be marked. Full marking, in accordance with [MIL-PRF-15733](#), shall be marked on the unit package.

Referenced documents. In addition to [MIL-PRF-15733](#), this specification sheet references the following documents.

[MIL-STD-202](#)

This specification is marked with vertical lines to indicate where changes from the previous revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:  
Navy - EC  
DLA - CC

Preparing activity:  
DLA - CC  
(Project 5915-2015-018)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil/>.