

INCH-POUND


MIL-PRF-28776/4H
4 June 2015
SUPERSEDING
MIL-PRF-28776/4G
23 June 2003

PERFORMANCE SPECIFICATION SHEET

RELAYS, HYBRID, ESTABLISHED RELIABILITY, SPDT,
LOW-LEVEL TO 1.0 AMPERE (SENSITIVE COIL OPERATE POWER AT 25°C)
(TRANSISTOR DRIVEN) (ELECTROMECHANICAL OUTPUT) WITH DIODE COIL SUPPRESSION

This specification sheet is approved for use by all Departments
and Agencies of the Department of Defense.

The complete requirements for acquiring the product described herein shall
consist of this specification sheet and the latest issue of [MIL-PRF-28776](#).

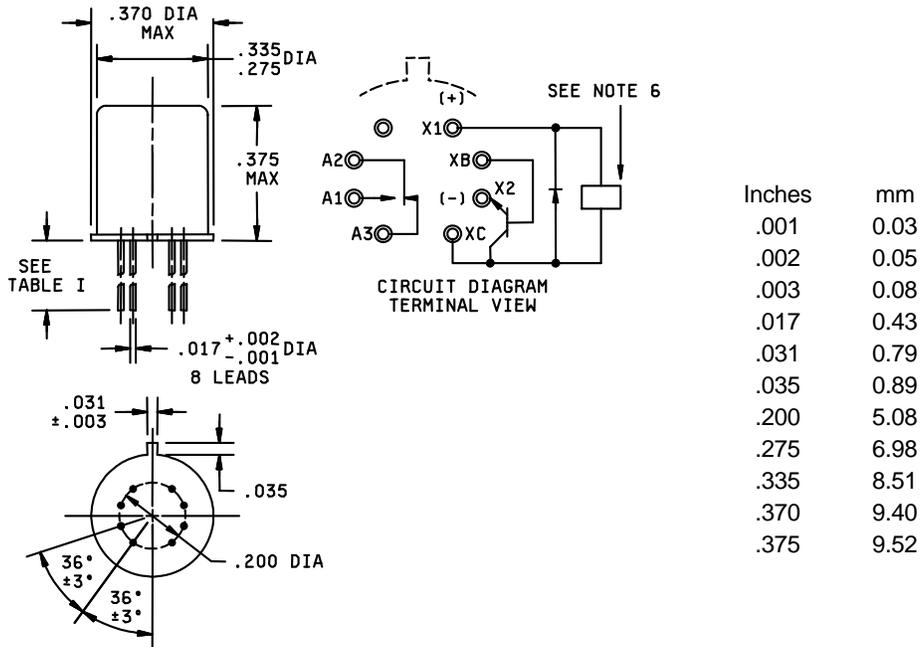


NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 0.010 (0.25 mm).
4. Terminal numbers shown above are for reference only. Numbers do not appear on the relay.
5. Relays shall have a plus (+) sign placed on the circuit diagram as shown.
6. Coil symbol optional in accordance with [MIL-STD-1285](#).
7. Circuit diagram shown on part is the terminal view.

FIGURE 1. Dimensions and configuration.



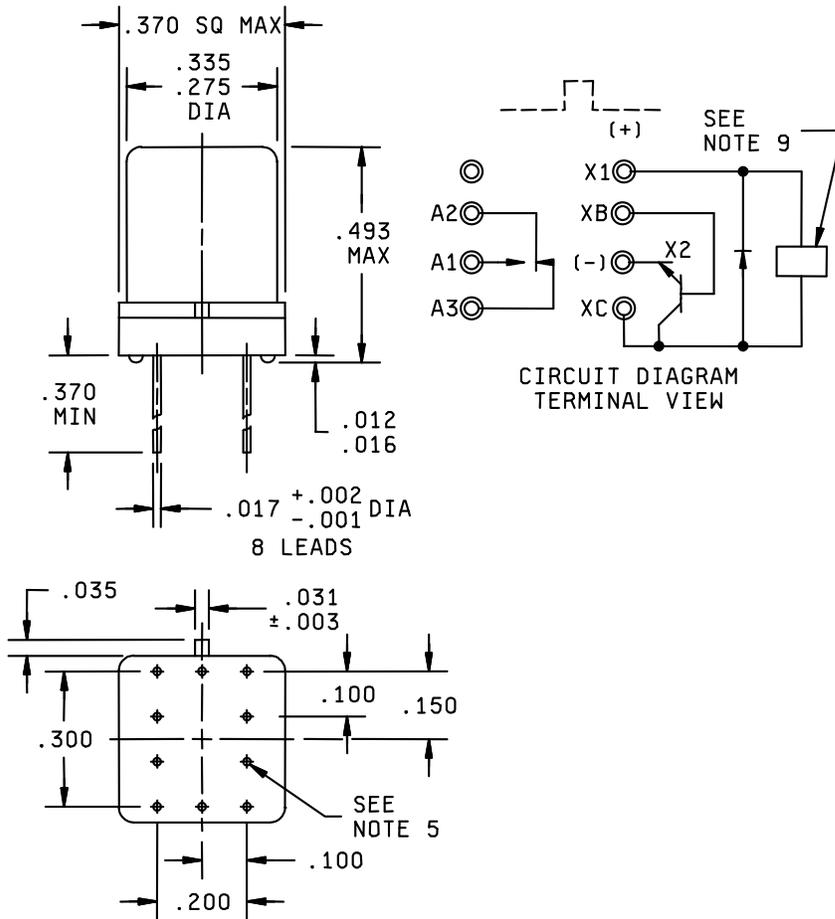

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.012	0.30
.016	0.41
.017	0.43
.031	0.79
.035	0.89
.100	2.54
.150	3.81
.200	5.08
.275	6.98
.300	7.62
.335	8.51
.370	9.40
.375	9.52
.493	12.52

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 0.010 (0.25 mm).
4. Spreader pads shall comply with the requirements of A-A-55485/05-003.
5. Dimensions and tolerances shown for the bottom view of the spreader pad are for the center to center locations of the holes in the spreader pad.
6. Shape optional within the envelope dimension.
7. Terminal numbers shown above are for reference only. Numbers do not appear on the relay.
8. Relays shall have a plus (+) sign placed on the circuit diagram as shown.
9. Coil symbol optional in accordance with MIL-STD-1285.
10. Circuit diagram shown on part is the terminal view.

FIGURE 2. Dimensions and configuration relay with spreader pad attached.

REQUIREMENTS:

CONTACT DATA:

Load ratings:

High level (relay case grounded):

Resistive:

1.0 ampere at 28 V dc.

250 milliamperes at 115 V ac 60 and 400 Hz case not grounded.

100 milliamperes at 115 V ac 60 and 400 Hz case grounded.

Inductive load: 0.2 ampere at 28 V dc with 0.32 henry inductance.

Lamp: 0.10 ampere at 28 V dc.

Low level: 10 μ A to 50 μ A at 10 mV to 50 mV dc or peak ac maximum.

Intermediate current: Applicable.

Contact resistance or voltage drop:

Initial: 100 m Ω maximum, 125 m Ω maximum with spreader pad attached, (tested at 10 mA maximum at 6 V dc maximum or peak ac).

High level:

During life: Not more than 5 percent of open circuit voltage.

After life: 200 m Ω maximum (225 m Ω maximum with spreader pad attached).

Low level:

During life: 33 Ω maximum.

After life: 150 m Ω maximum (175 m Ω maximum with spreader pad attached).

Intermediate current:

During life: 1 Ω maximum.

After life: 200 Ω maximum (225 m Ω maximum with spreader pad attached).

Contact bounce: 1.5 milliseconds maximum.

Contact stabilization time: 2.0 milliseconds maximum.

Overload (high level only): Two times rated current. Not applicable to ac load ratings.

MIL-PRF-28776/4H

COIL DATA:

Supply voltage: See [table I](#).

Turn-off time: 7.5 ms maximum.

Turn-on time: 3.5 ms maximum.

DIODE DATA:

Coil transient suppression: 1.0 V maximum.

Diode peak inverse voltage: 100 V minimum.

TRANSISTOR DATA:

Specified base turn-off voltage: 0.3 V dc maximum.

Specified base turn-on current: See [table I](#).

Base emitter current: 15 mA maximum.

ELECTRICAL DATA:

Insulation resistance: 10,000 MΩ minimum at 500 V dc, except the resistance between coil and case at high temperature shall be 1,000 MΩ minimum.

Dielectric withstanding voltage:

	Sea level V rms (60 Hz)	Post intermediate current life test Sea level V rms (60 Hz)	Altitude V rms (60 Hz)
Between case, frame or enclosure, and all contacts in the energized and deenergized positions: -----	500	500	
Between case, frame or enclosure, and coil: -----	500	500	125
Between all contacts and coil: -----	500	500	All terminals to case
Between open contacts in the energized and deenergized positions: -----	500	375	

ENVIRONMENTAL DATA:

Temperature range: -65°C to +125°C.

Shock (specified pulse): Applicable. Test condition B.

Magnetic interference: Applicable.

Salt atmosphere (corrosion): Applicable.

PHYSICAL DATA:

Terminal strength: Applicable.

Pull test: Test condition A, 1 pound pull.

Bend test: Test condition C, 0.5 pound pull.

Twist test: Applicable.

Dimensions and configuration: See [figures 1](#) and [2](#).

Weight: 3.98 grams (0.14 ounce) maximum, 4.23 grams (0.149 ounce) maximum with spreader pad attached.

Seal: Hermetic.

Minimum marking: As specified in [MIL-PRF-28776](#).

LIFE TEST REQUIREMENTS:

High level: 100,000 cycles.

Low level: 100,000 cycles.

Intermediate current: 50,000 cycles.

Mechanical life: 1,000,000 cycles.

Part or Identifying Number (PIN): M28776/4- (dash number from [table I](#) and suffix letter designating failure rate level).

TABLE I. Dash numbers and characteristics. ^{1/}

Dash numbers ^{2/}				Supply voltage (V dc) ^{5/}		At +25°C							Over temperature range			
Lead length 1.500 min ^{3/}	Lead length .187 +.050 -.010	Lead length .500 min	Spreader pad (fig. 2) ^{4/}			Coil resistance (ref. only) ohms ^{6/}	Coil circuit current (mA) ^{6/ 7/}		Speci- fied pick- up volt. (V dc) ^{7/}	Speci- fied hold volt. (V dc) ^{7/}	Speci- fied drop- out volt. (V dc) ^{7/}	Speci- fied base current to assure turnon (mA)	Speci- fied pickup volt. (V dc) ^{7/}	Speci- fied hold volt. (V dc) ^{7/}	Speci- fied drop- out volt. (V dc) ^{7/}	Speci- fied base current to assure turnon (mA)
Rated		Max		Max	Min											
017	025	033	041	5.0	8.0	125	47.8	34.7	2.6	1.4	0.22	.28	3.6	2.0	0.15	1.20
018	026	034	042	6.0	11.0	255	27.7	21.2	3.5	2.0	0.28	.20	4.8	2.8	0.18	0.78
019	027	035	043	9.0	16.0	630	16.8	11.8	5.4	3.0	0.54	.13	7.8	4.2	0.35	0.48
020	028	036	044	12.0	22.0	1,025	13.6	10.1	6.6	4.0	0.63	.10	10.0	5.6	0.41	0.39
021	029	037	045	18.0	33.0	2,300	9.1	6.7	9.8	6.0	0.91	.07	14.5	8.4	0.58	0.26
022	030	038	046	26.5	45.0	4,000	7.7	5.7	12.8	8.0	1.37	.05	19.0	10.4	0.89	0.20
023	031	039	047	32.0	57.0	6,500	5.8	4.2	18.7	10.0	1.60	.04	24.0	15.0	1.00	0.16
024	032	040	048	40.0	75.0	11,000	4.3	3.1	23.3	13.0	2.10	.03	30.0	18.7	1.30	0.13

^{1/} Each relay possesses high level and low level capabilities. However, relays previously tested or used above 10 mA resistive at 6 V dc maximum or peak ac open circuit are not recommended for subsequent use in low level applications.

^{2/} The suffix letter L, M, P, or R to designate the applicable failure rate level shall be added to the applicable listed dash number. Failure rate level (percent per 10,000 cycles): L, 3.0; M, 1.0; P, 0.1; R, 0.01. Example: 017L - - - - -032R.

^{3/} 1.500 leads are inactive for new design.

^{4/} Relays supplied with spreader pads (-041 through -048) shall have the pad rigidly attached.

^{5/} CAUTION: The use of any supply voltage less than the rated supply voltage will compromise the operation of the relay.

^{6/} When rated supply voltage is applied to the supply terminals, the coil circuit current must be within the limits shown. Measure at 25°C at rated supply voltage for 5 seconds, maximum.

^{7/} Set base current from 3 mA to 15 mA during electrical measurements.

QUALIFICATION INSPECTION:

Qualification inspection and sample size: See [table II](#).

TABLE II. [Qualification inspection and sample size](#). [1/](#)

Single submission	Group submission	
37 units plus 1 unsealed unit for level L at C = 1 2/ 63 units plus 1 unsealed unit for level M at C = 1 2/ Qualification inspection as applicable.	M28776/4-038	37 units plus 1 unsealed unit for level L at C = 1 2/ 63 units plus 1 unsealed unit for level M at C = 1 2/ Qualification inspection as applicable.
	M28776/4-033	2 units each PIN.
	M28776/4-034	Qualification inspection group I.
	M28776/4-035	
	M28776/4-036	
	M28776/4-037	
	M28776/4-039	
	M28776/4-040	

[1/](#) For retention of qualification or extension of qualification to lower failure rate levels, all life test data accumulated on [MIL-PRF-28776/1](#), [MIL-PRF-28776/3](#), and [MIL-PRF-28776/5](#) may be used in addition to MIL-PRF-28776/4 data.

[2/](#) The number of units required for qualification testing shall be increased as required in group Q5 of table II, [MIL-PRF-28776](#), if the relay manufacturer elects to test the number of units permitting two or more failures. Prior to performance of qualification inspection testing, the relay manufacturer shall preselect the sampling plan.

Qualification inspection testing for relays supplied with spreader pads (-041 through -048), two (2) units of the 26.5 volt rated coil voltage (-046) shall be tested as follows:

Perform A1 tests of group A inspection. Relay leads shall be formed and the mounting pad removed.

Perform seal test. Rigidly attach mounting pad to relay. Perform A2 and A3 tests of group A inspection.

Perform visual and mechanical inspection (external).

Group A inspection testing for relays supplied with spreader pads (-041 through -048) shall be tested as follows:

Perform A1 tests of group A inspection. Relay leads shall be formed and the mounting pad removed.

Perform seal test. Rigidly attach mounting pad to relay. Perform A2 and A3 tests of group A inspection.

Perform visual and mechanical inspection (external).

Qualification inspection (reduced testing) and sample size: See [table III](#). If the relays produced for MIL-PRF-28776/4 are similar in construction and design except for the coils to the relays produced for [MIL-PRF-28776/3](#), then reduced testing for qualification of MIL-PRF-28776/4 relays may be performed concurrent with or subsequent to successful qualification of [MIL-PRF-28776/3](#) relays.

MIL-PRF-28776/4H

TABLE III. Qualification inspection (reduced testing).

Examination or test
2 units each supply voltage: Group Q1 of qualification inspection table.
1 unsealed sample unit: Internal examination.

SUPERSESSION DATA:

Supersession data: See [table IV](#).

TABLE IV. Supersession data.

Superseded PIN M28776/4-	New PIN M28776/4-
001	017
002	018
003	019
004	020
005	021
006	022
007	023
008	024
009	025
010	026
011	027
012	028
013	029
014	030
015	031
016	032

^{1/} Dash numbers -017 through -024 are inactive for new design and are for support of existing equipment designs only.

Referenced documents. In addition to [MIL-PRF-28776](#), this document references the following:

[MIL-STD-1285](#) [MIL-PRF-28776/1](#) [MIL-PRF-28776/3](#) [MIL-PRF-28776/5](#)

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:

Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:

DLA - CC

(Project 5945-2015-026)

Review activities:

Army - AR, CR4, MI
Navy - AS, OS, SH
Air Force - 19, 99
NSA – NS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.