

INCH POUND
MIL-PRF-3098/16K
16 April 2015
SUPERSEDING
MIL-PRF-3098/16J
5 March 2010

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR36/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and [MIL-PRF-3098](#).

Pertinent characteristics: 0.8 MHz to 20 MHz; fundamental; controlled; antiresonance.

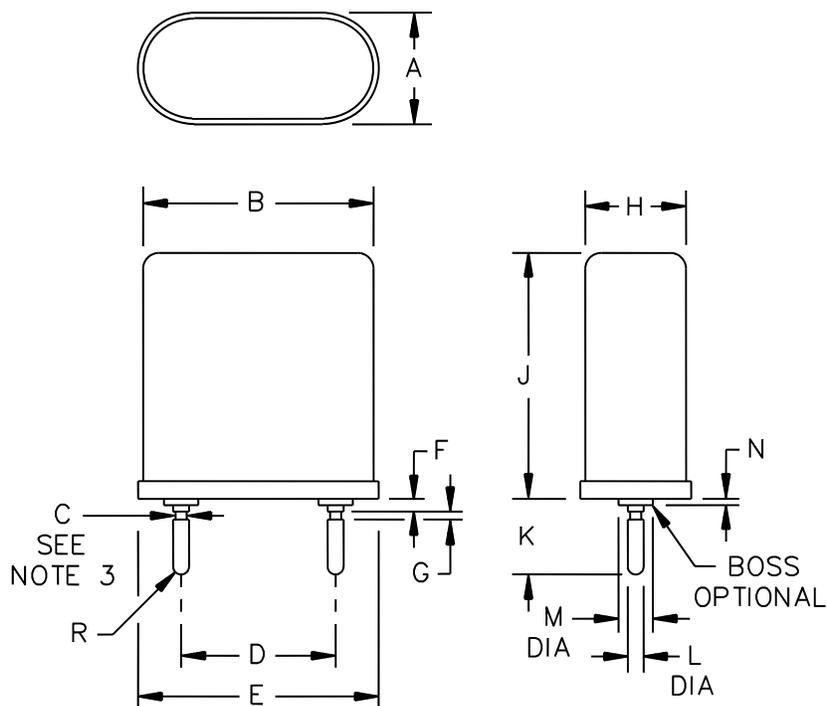


FIGURE 1. Crystal unit - CR36/U.



MIL-PRF-3098/16K

Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	.352	---	8.94
B	---	.725	---	18.41
C	.030	.037	0.76	0.94
D	.478	.494	12.14	12.55
E	---	.757	---	19.23
F	.030	.040	0.76	1.02
G	.015	.025	0.38	0.63
H	---	.317	---	8.05
J	---	.775	---	19.68
K	.223	.248	5.66	6.30
L	.048	.052	1.22	1.32
M	.075	.141	1.90	3.58
N	.015	.025	0.38	0.63

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking to be in accordance with [MIL-PRF-3098](#).

FIGURE 1. Crystal unit - CR36/U - Continued.

MIL-PRF-3098/16K

REQUIREMENTS:

Dimensions, marking, and configuration: See [figure 1](#).

Frequency range: 0.8 MHz to 20 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerance:

Operating temperature range: ± 20 parts per million (ppm).

Room temperature: ± 80 ppm.

Frequency stability: ± 5 ppm.

Equivalent resistance: See [table I](#).

Antiresonance, load capacitance: 32.0 pF ± 0.5 pF.

Mode of oscillation: Fundamental.

Reference temperature: $+85^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

Temperature ranges:

Operable: -55°C to $+80^{\circ}\text{C}$, inclusive.

Operating (controlled): $+80^{\circ}\text{C}$ to $+90^{\circ}\text{C}$, inclusive.

Rated drive level: 1.0 mW, maximum.

Shock (specified pulse):

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: Below 2MHz: ± 15 percent
2.0 MHz and above: ± 10 percent

Vibration: [Method 201 of MIL-STD-202](#).

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: Below 2MHz: ± 15 percent
2.0 MHz and above: ± 10 percent

MIL-PRF-3098/16K

Thermal shock:

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: Below 2MHz: ± 15 percent
 2.0 MHz and above: ± 10 percent

Aging:

Frequency change permitted: ± 5 ppm.

TABLE II. Equivalent resistance.

Frequency range, inclusive	Maximum resistance
<u>MHz</u>	<u>Ohms</u>
0.80 to 0.85	620
0.85+ to 0.90	600
0.90+ to 1.00	570
1.00+ to 1.12	540
1.12+ to 1.25	490
1.25+ to 1.37	450
1.37+ to 1.50	410
1.50+ to 1.62	370
1.62+ to 1.75	330
1.75+ to 1.87	300
1.87+ to 2.00	290
2.00+ to 2.12	270
2.12+ to 2.25	240
2.25+ to 2.60	190
2.60+ to 3.00	150
3.00+ to 3.40	110
3.40+ to 3.75	90
3.75+ to 4.00	75
4.00+ to 5.00	60
5.00+ to 7.00	35
7.00+ to 10.00	24
10.00+ to 15.00	22
15.00+ to 20.00	20

Referenced documents. In addition to [MIL-PRF-3098](#), this document references the following:

[MIL-STD-202.](#)

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MIL-PRF-3098/16K

Custodians:

Army - CR
Navy - EC
Air force - 99
DLA - CC

Preparing activity:

Army - CR

Agent:

DLA - CC

Review activities:

Army - AR, MI,
Navy - AS, CG, MC, SH
Air Force - 19, 84

(Project 5955-2015-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil/>.