

INCH POUND

MIL-PRF-3098/30G

05 March 2010

SUPERSEDING

MIL-PRF-3098/30F

19 December 2003

## PERFORMANCE SPECIFICATION SHEET

### CRYSTAL UNIT, QUARTZ, CR52/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and [MIL-PRF-3098](#).

Pertinent characteristics: 10 MHz to 61 MHz; third mechanical overtone; noncontrolled; series resonance.

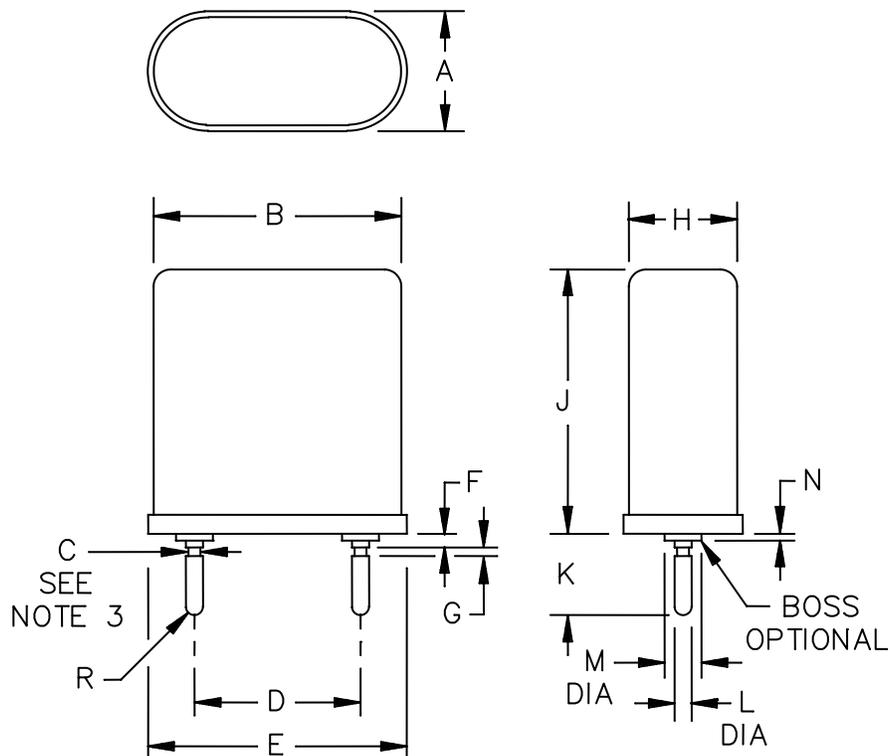


FIGURE 1. Crystal unit - CR52/U.

MIL-PRF-3098/30G

Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	.352	---	8.94
B	---	.725	---	18.42
C	.030	.037	0.76	0.94
D	.478	.494	12.14	12.55
E	---	.757	---	19.23
F	.030	.040	0.76	1.02
G	.015	.025	0.38	0.64
H	---	.317	---	8.05
J	---	.775	---	19.69
K	.223	.248	5.66	6.30
L	.048	.052	1.22	1.32
M	.075	.141	1.91	3.58
N	.015	.025	0.38	0.64

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking to be in accordance with [MIL-PRF-3098](#).

FIGURE 1. Crystal unit - CR52/U - Continued.

MIL-PRF-3098/30G

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 10 MHz to 61 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerance (operating temperature range):  $\pm 50$  parts per million (ppm).

Equivalent resistance: 40 ohms, maximum.

Mode of oscillation: Third mechanical overtone.

Operating temperature range (noncontrolled):  $-55^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ , inclusive.

Rated drive level: 1.0 mW, maximum.

Resonance: Series.

Shock (specified pulse):

Frequency change permitted:  $\pm 5$  ppm.

Equivalent resistance change permitted:  $\pm 10$  percent.

Vibration: [Method 201 of MIL-STD-202](#).

Frequency change permitted:  $\pm 5$  ppm.

Equivalent resistance change permitted:  $\pm 10$  percent.

Temperature run:

Frequency change permitted:  $\pm 5$  ppm.

Equivalent resistance change permitted:  $\pm 10$  percent.

Aging:

Frequency change permitted:  $\pm 5$  ppm

Part or Identifying Number (PIN): CR52/U (followed by specified frequency), see 1.2 of [MIL-PRF-3098](#).

MIL-PRF-3098/30G

Referenced documents. In addition to [MIL-PRF-3098](#), this document references the following:

[MIL-STD-202](#).

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - CR  
Navy - EC  
Air force - 99  
DLA - CC

Preparing activity:

Army - CR

Agent:

DLA - CC

Review activities:

Army - AR, MI  
Navy - AS, MC, SH  
Air Force - 19, 84

(Project 5955-2009-044)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil>.