

INCH-POUND


MIL-PRF-55339/12A
25 August 2004
SUPERSEDING
MIL-PRF-55339/12
6 May 1975

PERFORMANCE SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY, IN-LINE, JAMNUT MOUNTED, (WITHIN SERIES C JACK TO SERIES C JACK (HERMETIC)), CLASS 2

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall
consist of this specification sheet and MIL-PRF-55339.

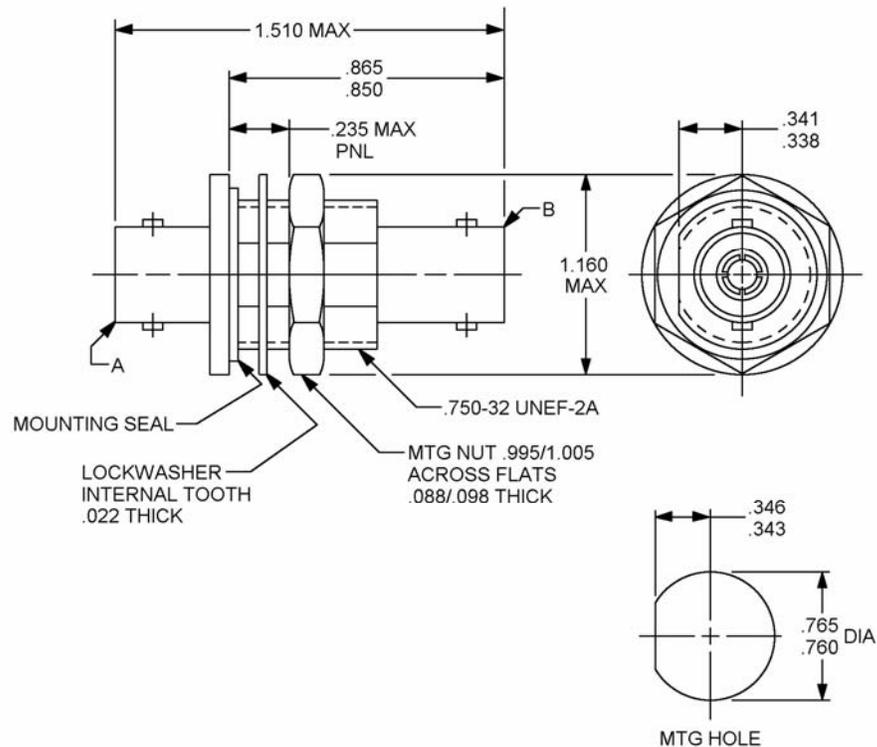

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All undimensioned pictorial representations are for reference purposes only.
4. Interface dimensions to be in accordance with MIL-STD-348, series C socket contact.

FIGURE 1. General configuration.

Reference	Series	Contact
A and B	C	Socket

Inches	mm	Inches	mm
.022	0.56	.760	19.30
.088	2.24	.765	19.43
.098	2.49	.850	21.59
.235	5.97	.865	21.97
.338	8.59	.995	25.27
.341	8.66	1.005	25.53
.343	8.71	1.160	29.46
.346	8.79	1.510	38.35
.750	19.05		

FIGURE 1. General configuration - Continued.

DESIGN AND CONSTRUCTION

General configuration: See figure 1.

Impedance: 50 ohms, nom.

Working voltage: Sea level – 1,000 V rms.
70,000 feet (4.437 kPa) – 250 V rms.

Frequency range: 0 to 11 GHz.

Temperature range: -65° to +165°C.

PERFORMANCE (installation torque is not applicable)

Dimensions: See figure 1 and MIL-STD-348.

Center contact retention: Axial force – 6 lb. (26.69 N), min.
Torque – Not applicable.

Force to engage and disengage: Longitudinal force – 4.5 lb. (20.02 N), max.
Torque – 4 in-lb. (0.45 Nm), max.

Coupling proof torque: Not applicable.

Mating characteristics:

Center contact (socket):

- Oversize test pin dia. - .098 in. (2.49 mm), min.
- Insertion depth - .125 in. (3.18 mm), min.
- Number of insertions – 1.

Max test pin (insertion force test):

- Steel test pin dia. - .092 in. (2.34 mm), min.
- Pin finish – 16 microinches (0.41 μm).
- Insertion force – 2 lb. (8.89 N), max.
- Number of insertions – 1.

MIL-PRF-55339/12A

Min test pin (withdrawal force):
Steel test pin dia. - .090 in. (2.29 mm), max.
Pin finish – 16 microinches.
Withdrawal force – 2 oz. (0.56 N), min.
Number of withdrawals – 1.
Outer contact: Not applicable.

Permeability: <2.0.

Seal: Hermetic – 1×10^{-7} atm cm³/s (center contact to body).
Pressurized – Not applicable.
Weatherproof – 30 psi (207 kPa), (mounting seal).

Insulation resistance: 5,000 megohms, min.

VSWR: 1.45:1, max .5 to 11 GHz.

RF leakage (total): -55 dB, min, 2 to 3 GHz.

RF insertion loss: .25 dB, max, 6 GHz ($1.02 \sqrt{F}$ (GHz) dB max tested at 3 and 6 GHz).

Durability: 500 cycles minimum at 12 cycles/min, maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Dielectric withstanding: Test voltage – 3,000 V rms, min (sea level).

Contact resistance (milliohms, max):

<u>Contact</u>	<u>Initial</u>	<u>After environmental</u>
Center	2.0	2.5
Outer	0.3	N/A
Outer (-70001)	0.6	N/A

Vibration, high frequency: Interruptions – 1 μ s, max.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, min.

Corona level: Voltage – 750 V, min.
Altitude - 70,000 feet (4.437 kPa), min.

RF high potential withstanding voltage: RF voltage – 2,500 V rms, min.
Frequency – 5 MHz, min.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: Not applicable.

Part or Identifying Number (PIN): M55339/12-01138 or M55339/12-70001.

PIN: M55339/12-70001. **CAUTION: THIS PART HAS A NICKEL PLATED BODY AND IS NOT FOR USE IN APPLICATIONS WHERE PASSIVE INTERMODULATION GENERATION (PIM) MAY BE A CONCERN.**

Cross reference: See table I.

TABLE I. Cross reference of PIN.

PIN	Superseded PIN or type designation ^{1/}
M55339/12-01138	MS90554 MS90266 REB49272 UG-701A/U UG-1138A/U

^{1/} The superseded PIN or the type designation is for cross reference only. Where a superseded PIN or type designation is not given, none was assigned or will be assigned. The PIN M55339/12-01138 shall be used in all cases for marking and identifying the adapter.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-PRF-55339, this document references the following:

MIL-STD-348

CONCLUDING MATERIAL

Custodians:

Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:

DLA - CC

(Project 5935-4657-011)

Review activities:

Army – AR, AT, EA, MI
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.