



MS24193H
w/AMENDMENT 1
27 April 2006
SUPERSEDING
MS24193H
27 November 2003

DETAIL SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 50 AMPERES,
3PST TYPE II, NON-HERMETICALLY SEALED

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall
consist of this specification and the latest issue of MIL-PRF-6106.

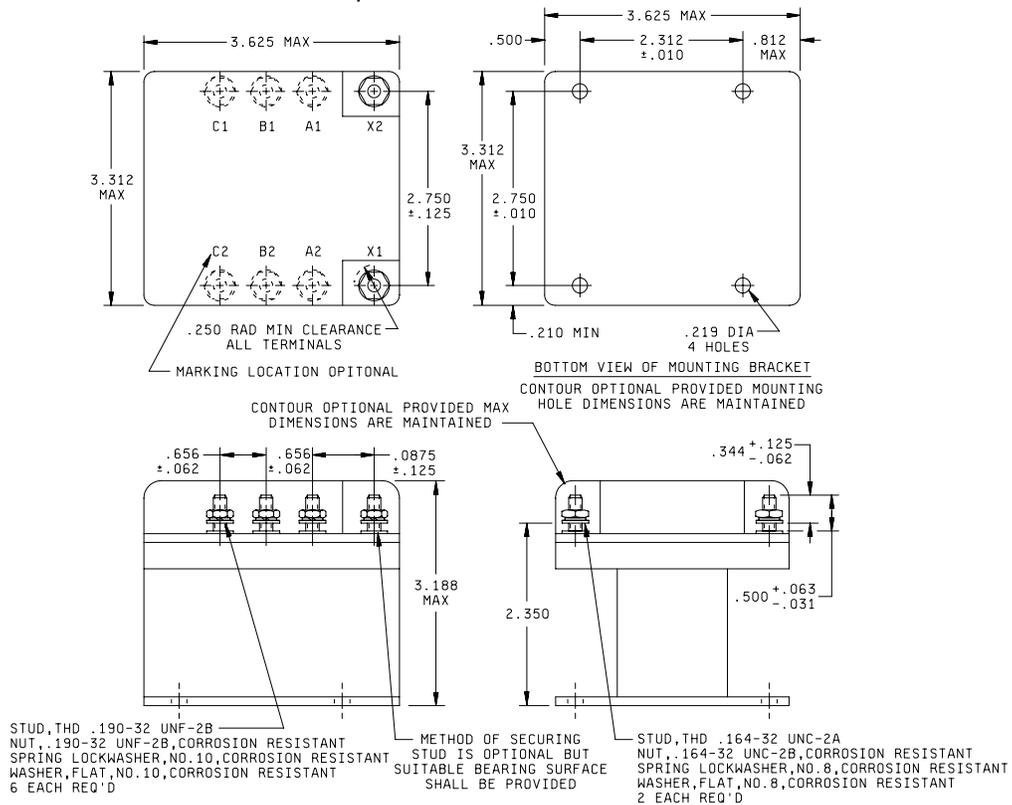

CIRCUIT DIAGRAM

FIGURE 1. Dimensions and configuration.

MS24193H
w/AMENDMENT 1

Inches	mm	Inches	mm	Inches	mm
.010	.25	.210	5.33	.875	22.23
.031	.79	.219	5.56	2.350	59.69
.062	1.57	.250	6.35	2.750	69.85
.063	1.60	.344	8.74	3.188	80.98
.125	3.18	.500	12.70	3.312	84.12
.164	4.17	.656	16.66	3.625	92.08
.190	4.83	.812	20.62		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.031 (0.79 mm).
4. Additional flat washer may be used for terminal seat.
5. Terminal covers and barriers required at power terminals.
6. Part number MS24193-D1 replaces number AN3341-1.
7. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.
8. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation forms a part of this standard to the extent specified herein.

TABLE I. Dash numbers and characteristics.

Dash number MS24193-	Type	Coil	Terminal type	Mounting or mating socket	Max weight in pounds
D1	II	dc	Stud	Plate	1.6

FIGURE 1. Dimensions and configurations - Continued.

TABLE II. Operating characteristics.

PIN MS 24193-	Coil data												Time (milliseconds-maximum)						
	Coil	Rated				Max		Max pick-up voltage			Hold voltage <u>2/</u>	Drop out vol- tage <u>2/</u>	Oper- ate <u>3/</u>	Rel- ease <u>4/</u>	Bounce <u>5/</u>				
		Volts <u>1/</u>	Freq Hz	Res Ω $\pm 10\%$ 25°C		Volts	Amperes	Nor- mal <u>2/</u>	High temp test	Cont cur- rent test					Main		Aux		
				NO	NC										NO	NC			
In- rush	Steady state	In- rush	Steady state																
D1	X1, X2	28	dc	13.5	71.5	29	2.4	.45	18	21	22.5	7.0	1.5	20	15	4	---	---	---

1/ CAUTION: Use of any coil voltage less than rated coil voltage will compromise the operation of the relay.

2/ Over the temperature range.

3/ With rated coil voltage.

4/ From rated coil voltage.

5/ Bounce time after life test 8 ms.

3

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operat- ing cycles $\times 10^3$	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase <u>1/</u>				See appropriate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	50	50			50				50					
Inductive	10	50			50				50					
Inductive														
Motor	50	50			50				50					
Lamp														
Transfer load														<u>2/</u>
Mechanical life reduced current	100	12.5			12.5				12.5					
Mixed loads	50	5			5				5					

1/ Absence of value indicates relay is not rated for 3-phase application.

2/ Transfer load indicates relay is suitable for transfer between unsynchronized ac power supplies at rating indicated.

MS24193H
w/AMENDMENT 1

MS24193H
w/AMENDMENT 1

Environmental characteristics.

Temperature range -55°C to +71°C
 Max altitude rating 50,000 ft
 Shock G-level 25 g's
 Duration 6 - 9 ms
 Max duration contact opening 2 ms

Vibration - sinusoidal

5-10 Hz	10-55 Hz	55-250 Hz	250-500 Hz	500-1500 Hz
.08 DA	.06 DA	2 g's	2 g's	

Vibration - Random

Applicable specification N/A
 Power spectral density N/A
 RMS G-min N/A
 Frequency range N/A
 Curve N/A
 High shock N/A
 Acceleration 10 g's

Electrical characteristics.

Insulation resistance, initial 100 megohms.
 After life or environmental tests 50 megohms.

Dielectric strength (sea level). 2-5 seconds

	Initial		After life tests	
	28 V dc	115 V ac	28 V dc	115 V ac
Coil to case	1,250 V rms	N/A	1,000 V rms	N/A
Aux contacts	1,250 V rms	N/A	1,000 V rms	N/A
All other points	1,250 V rms	1,500 V rms	1,000 V rms	1,125 V rms

Dielectric strength (altitude): 1 minute.

	28 V dc	115 V ac
Coil to case	500 V rms	N/A
Aux contacts	500 V rms	N/A
All other points	500 V rms	500 V rms

Max contact drop initial: 0.150 volt.
 After life test: 0.175 volt.
 Overload current (N.O.): 400 amperes
 Rupture current (N.O.): 500 amperes
 Duty rating: Continuous.
 RFI specification: MIL-STD-461.
 (Applicable to coil circuits of ac operated relays).

Qualification by similarity: See MIL-PRF-6106.

MS24193H
w/AMENDMENT 1

NOTES

Referenced documents. In addition to MIL-PRF-6106, this specification sheet references the following documents. (Government documents are available on line at <http://assist.daps.dla.mil/quicksearch> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094).

STANDARDS

Department of Defense

MIL-STD-461 - Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment

Changes from previous issue: Marginal notations are mark with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
NAVY - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC
(Project 5945-2006-022)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at <http://assist.daps.dla.mil>.