

NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-6106/32(USAF)
30 December 1977

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, SOCKET MODULE EXTRACTION TOOL

This specification sheet is approved for use by the Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for procuring the socket module extraction tool described herein shall consist of this document and the latest issue of Specification MIL-PRF-6106.

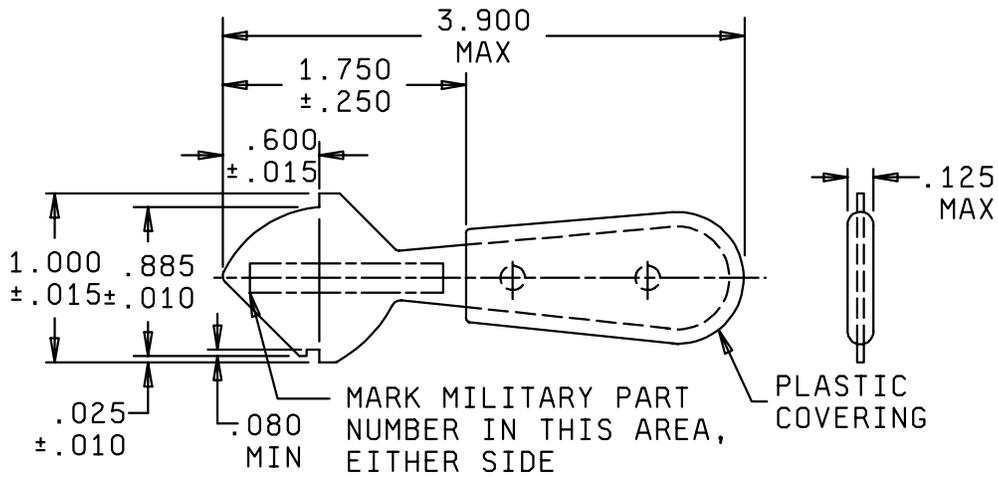

Inches	mm	Inches	mm
.005	0.13	.125	3.18
.010	0.25	.600	15.24
.015	0.38	.885	22.48
.025	0.64	1.000	25.40
.037	0.94	1.750	44.45
.080	2.03	3.900	99.06
.100	2.54		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information.

FIGURE 1. Outline drawing, socket module extraction tool.

MIL-R-6106/32(USAF)

REQUIREMENTS:

Material: Stainless steel, .037 ±.005 thick.

Finish: Passivated.

Relay socket module extraction tool shall be used to remove socket modules from relay bracket mount, MIL-R-6106/25.

Part number: M6106/32-001.

Custodian:

Air Force - 85

Preparing activity:

Air Force - 85

Review activities:

Air Force - 99

DLA - ES

(Project 5945-F381-4)

★ U.S. GOVERNMENT PRINTING OFFICE: 1977 - 703-122/967