

INCH-POUND

MIL-PRF-83726/28K
04 March 2013
SUPERSEDING
MIL-PRF-83726/28J
14 June 2012

PERFORMANCE SPECIFICATION SHEET

RELAYS, HYBRID, TIME DELAY (ON OPERATE), CLASS B, TYPE I,
HERMETICALLY SEALED, DPDT, 10 AMPERES, FIXED TIME, 0.1 TO 500 SECONDS

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall
consist of this specification sheet and [MIL-PRF-83726](#).


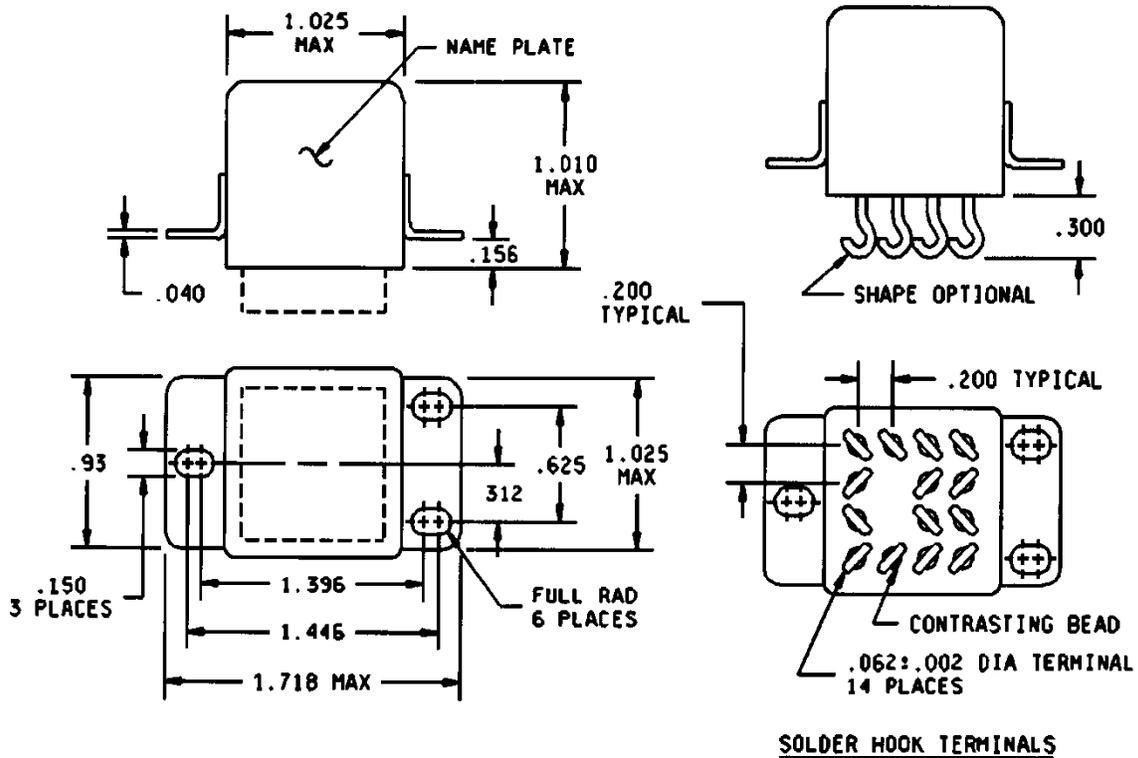


FIGURE 1. Outline dimensions and configuration of relay.

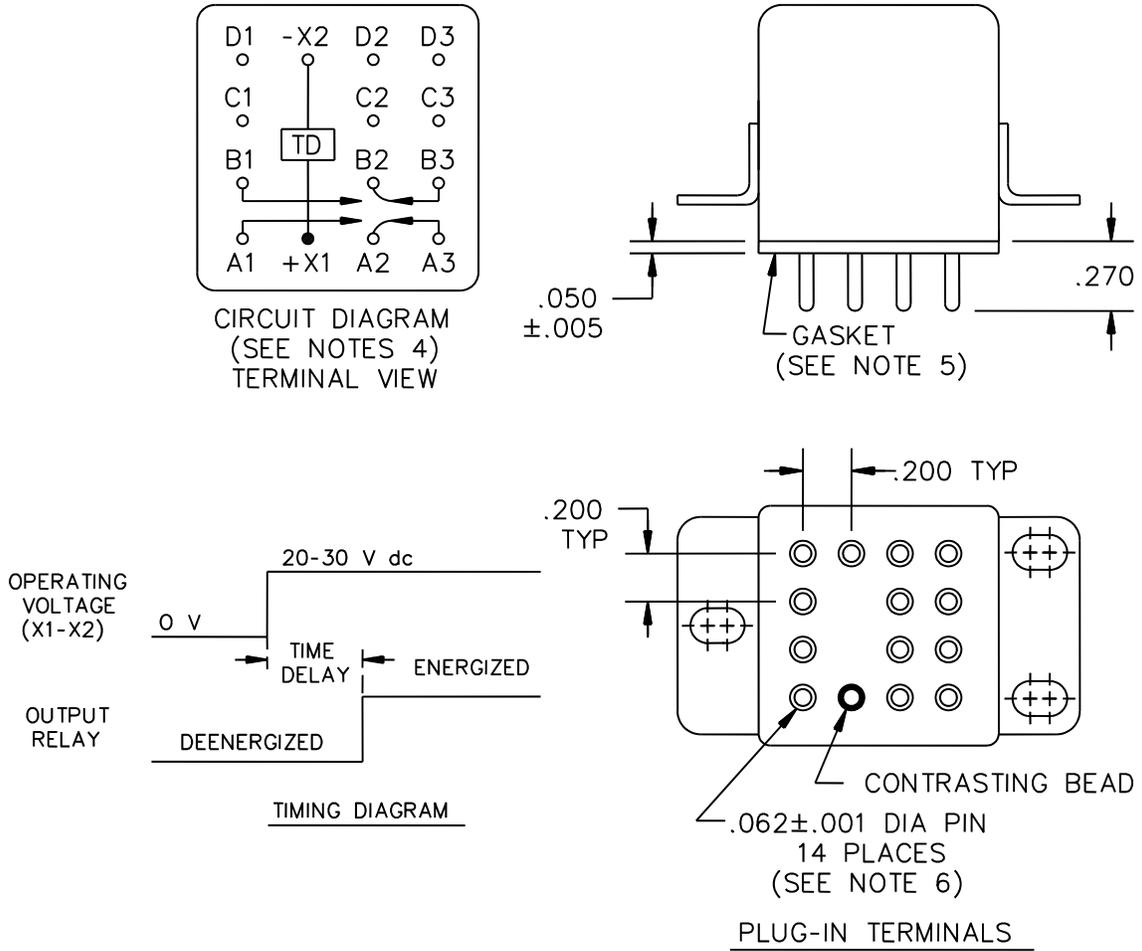

Inches	mm	Inches	mm
.001	0.03	.300	7.62
.002	0.05	.312	7.92
.005	0.13	.625	15.88
.040	1.02	.930	23.60
.050	1.27	1.010	25.65
.062	1.57	1.025	26.04
.150	3.81	1.396	35.46
.156	3.96	1.446	33.73
.200	5.08	1.718	43.64

FIGURE 1. Outline dimensions and configuration of relay – Continued.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 0.010 (0.25 mm) for three place decimals and ± 0.03 (0.8 mm) for two place decimals.
4. Terminal numbers shall not appear on the relay header and there shall be a legible circuit diagram on the relay which identifies each terminal location specified.
5. Gasket material: The gasket material shall be of such quality to ensure the relay meets all the performance requirements of this specification. Silicone rubber gasket [SAE-AMS3332](#), shore hardness 20 ± 5 has been considered acceptable.
6. Terminal composition: The terminal composition shall be of such quality to ensure the relay meets all the performance requirements of this specification. Gold in accordance with [SAE-AMS2422](#) or [ASTM-B488](#), Type 3; underplating: nickel, 50 to 150 microinches thick; has been considered acceptable.
7. Terminal C2 is optional.

FIGURE 1. Outline dimensions and configuration of relay – Continued.

REQUIREMENTS:

OPERATING REQUIREMENTS:

Timing action: Delay-on-operate.

Time delay: Fixed; select from 0.1 second to 500 seconds.

Timing accuracy: ± 10 percent of nominal value. (The accuracy requirement applies for any combination of operating temperature and voltage. Add ± 10 ms for timing less than 1 second.)

Recycle time: 50 milliseconds maximum.

Power interrupt: 500 microseconds. (Transient and power loss specifications are based on a maximum duty cycle of 1/50.)

Operating current: 150 mA maximum at 25°C.

INPUT REQUIREMENTS:

Input voltage range: 20 V dc to 30 V dc. (Minimum high temperature test 21 V dc, minimum continuous current test 23.5 V dc.)

Duty rating: Continuous.

Polarity protection: The timer shall be inoperative during, and undamaged by, reversal of the polarity of the operating voltage.

OUTPUT REQUIREMENTS: (At +25°C unless otherwise specified.)

Configuration: DPDT.

Life: See [table I](#).

TABLE I. Life load ratings (relay case grounded).

Type of load	Life (cycles)	Amperes 28 V dc	Amperes 115/200 V ac 400 Hz
Resistive	100,000	10	10
Inductive	20,000	8	8
Motor	100,000	4	4
Lamp	100,000	2	2
Low level 1/	100,000		---

[1/](#) Contact load 10 μ A to 50 μ A at 10 mV to 50 mV (dc or peak ac).

ELECTRICAL REQUIREMENTS:

Transients: in accordance with [MIL-STD-704](#) for 28 volts dc system .

Spike:

Self-generated: ± 50 volts maximum.

Spike transients: ± 600 V, 10 microseconds maximum.

Susceptibility: + 80V maximum; -600 V maximum.

MIL-PRF-83726/28K

Electromagnetic interference: In accordance with [MIL-STD-461](#)(methods CS101, CS114, RS101, and RS103). (EMI test limits will not be exceeded during the timing interval or when continuously energized under steady-state conditions in accordance with the EMI test of [MIL-PRF-83726](#).)

Insulation resistance: 1,000 megohms at 500 V dc at sea level, and 100 V dc at 80,000 feet between each pin and case. (Terminals X1 and X2 must be connected together during this test. Insulation resistance is measured between all mutually insulated terminals and between all terminals and case.)

Dielectric withstanding voltage: 1,000 V rms at 60 Hz at sea level, and 350 V rms at 80,000 feet between case and pins connected together. (Terminals X1 and X2 must be connected together during this test. Dielectric withstanding voltage is measured between all mutually insulated terminals and between all terminals and case.)

ENVIRONMENTAL REQUIREMENTS:

Ambient temperature (operating or non-operating): -55°C to +125°C.

Vibration (sinusoidal): 30 g's, 10 Hz to 3,000 Hz.

Vibration (random): 0.4 g²/Hz power spectral density, 50 Hz to 2,000 Hz in accordance with [MIL-STD-202](#), method 214, test condition 1G. Duration of 15 minutes each plane.

Shock (specified pulse): 100 g's, 6 ±1 ms, ½ sine, 3 axes.

Acceleration: 15 g's in any axis.

Seal: Hermetic.

Maximum altitude rating: 80,000 feet.

PHYSICAL REQUIREMENTS:

Dimensions and configuration: See [figure 1](#).

Mating socket: M12883/40-01, M12883/40-05, M12883/40-07, M12883/40-11, M12883/40-13, M12883/40-17, M12883/40-19, or M12883/40-23 per [MIL-DTL-12883/40](#). (CAUTION: Consideration should be given to ambient temperature and current requirements when using wire barrels size 20.)

Terminations: See [figure 1](#).

Terminal strength: 3 pounds pull.


Weight: 2.5 ounces maximum.

Marking: See [MIL-PRF-83726](#). In addition, relays shall be marked with the ESDS identifier as specified in [MIL-STD-1285](#).

Electrostatic discharge (ESD) control program: Applicable (see [MIL-PRF-83726](#)).

MIL-PRF-83726/28K

Part or Identifying Number (PIN): Consists of the prefix M83726/28-, a four digit dash number (time delay expressed in milliseconds), and a suffix letter (P for plug-in, S for solder lug):

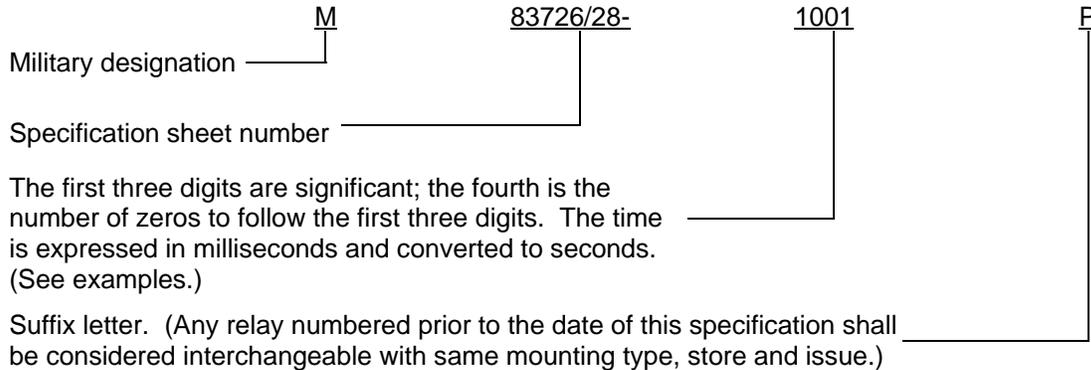

Examples:

- M83726/28-1001P – 1 second time delay, plug-in.
- M83726/28-9002S – 90 second time delay, solder lug

NOTE: Time delay relays within the 0.1 second to 500 second delay range are available.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to [MIL-PRF-83726](#), this document references the following:

- | | | | |
|-----------------------------|-----------------------------|-----------------------------|----------------------------------|
| MIL-STD-202 | MIL-STD-461 | MIL-STD-704 | MIL-STD-1285 |
| ASTM-B488 | SAE-AMS2422 | SAE-AMS3332 | MIL-DTL-12883/40 |

Custodians:
Navy - EC
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5945-2013-006)

Review activities:
Navy - OS
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.