


FEDERAL SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, SPECIAL PURPOSE, CABLE OUTLET, LOCKING,
 GROUNDING, 3 POLE, 4 WIRE, 20 AMPERES, 125/250 VOLTS, 50/60 HERTZ

The General Services Administration has authorized the use
 of this federal specification sheet by all federal agencies.

The complete requirements for procuring the connectors described herein shall
 consist of this document and the latest issue of W-C-596/GEN.

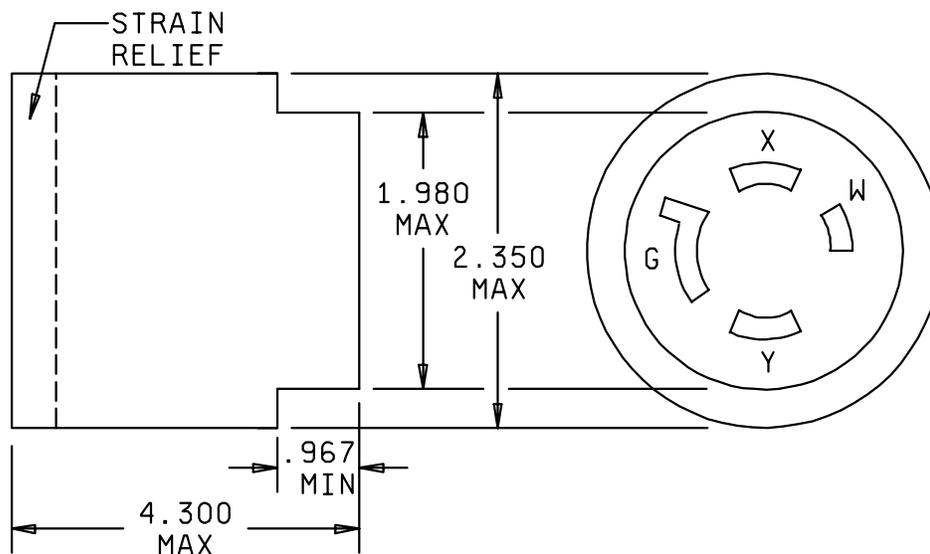

Inches	mm
0.967	24.56
1.980	50.29
2.350	59.69
4.300	109.22

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Undimensioned pictorials are for reference purposes only.

FIGURE 1. Configuration and dimensions.

REQUIREMENTS:

Design and configuration: See figure 1.

Dimensions: Shall conform to NEMA WD 6, configuration L14-20R.

Armored construction: Not acceptable.

Ratings:

Voltage: 125/250 volts.

Current: 20 amperes.

Frequency: 50/60 hertz.

Mating connector: W-C-596/121 and /123.

Strain relief: Accommodate cable diameter .390 - .710 inch.

Part or Identifying Number (PIN): W-C-596/122- (dash number from table I).

Supersession and cross reference: See table II.

TABLE I. Dash number.

Dash no.	Supersedes style	Description
1		Cable outlet

TABLE II. Supersession and cross reference.

Active Government PIN	Superseded numbers		
	CAGE ^{1/} 74545	CAGE 04009	CAGE 81091
W-C-596/122-1	2413 2413-CY	6403 6404	L1420-C

^{1/} CAGE is the Commercial and Government Entity code which is assigned and maintained by Defense Logistics Information Service (DLIS) in Battle Creek, MI.

MILITARY INTERESTS:

Custodians

- Army - CR
- Navy - YD
- Air Force - 11
- DLA - CC

Review Activities

- Army - AV, CR4, MI
- Navy - AS, EC, MC, SH

CIVIL AGENCY
COORDINATING ACTIVITIES:

- DCGOVT - DCG
- DOT - ACO
- GSA - 7FXE
- HHS - FEC
- USDA - AFS

Preparing Activity:
DLA - CC

(Project 5935-4305-63)