

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED

Requirements of DSCC drawing 86045 are applicable.

Prepared in accordance with ASME Y14.100

REV																				
PAGE																				
REV STATUS OF PAGES	REV																			
	PAGE	1	2	3	4	5														

PMIC S	PREPARED BY Ron Gary		DEFENSE SUPPLY CENTER, COLUMBUS P.O. BOX 3990, COLUMBUS, OHIO 43218-3990																	
	Original date of drawing 12 May 2006	CHECKED BY Mary McWilliams		TITLE CABLE, ELECTRICAL, RADIO FREQUENCY, COAXIAL, 50 OHMS, DOUBLE SHIELDED RG-178																
APPROVED BY Richard Taylor																				
	SIZE A	CAGE CODE 037Z3		DWG. NO.				06017												
		REV		PAGE				1	OF				5							

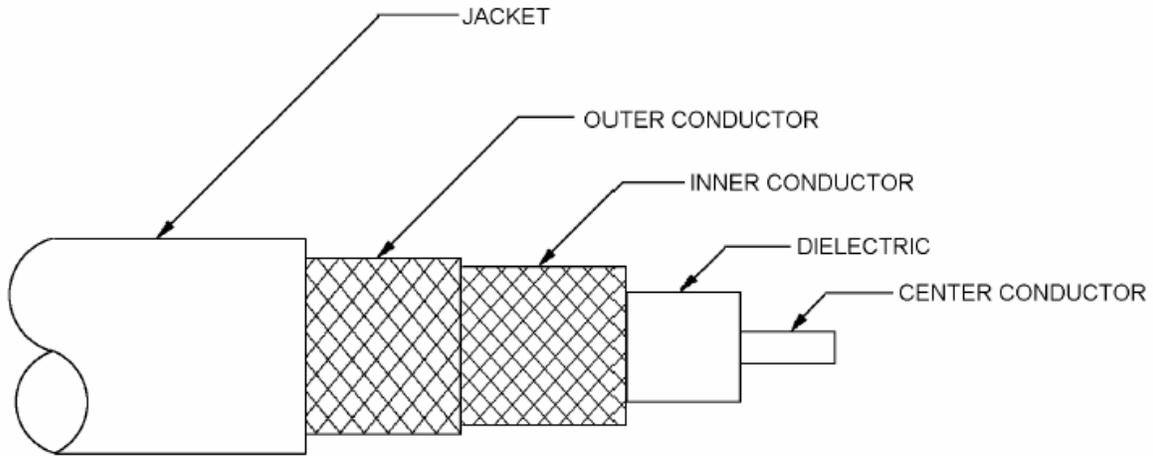


FIGURE 1. CONFIGURATION.

TABLE 1. Description.

Component	Construction details
Inner conductor	Seven strands of silver-coated, annealed-copper-covered steel wire, each strand .004 inch diameter. Overall diameter: 0.012 inch \pm 0.001.
Dielectric core	Type F-1: Solid, extruded PTFE. Diameter: 0.033 inch \pm 0.002.
Inner conductor	Single braid of AWG No. 38 silver-coated copper wire. Diameter: .054 inch, maximum. Coverage : 95.9% nominal. Carriers : 16 Ends : 3 Picks/inch : 25.0 \pm 10%
Outer conductor	Single braid of AWG No. 38 silver-coated copper wire. Diameter: .075 inch, maximum. Coverage : 94.7% nominal. Carriers : 16 Ends : 4 Picks/inch : 21.1 \pm 10%
Jacket	Type IX: FEP. Diameter: 0.092 inch \pm 0.004.

DEFENSE SUPPLY CENTER, COLUMBUS
COLUMBUS, OH 43218-3990

SIZE

A

CAGE CODE

037Z3

REV

DWG NO.

06017

PAGE

2

ENGINEERING INFORMATION:

Continuous working voltage: 750 V rms, maximum.

Operating frequency: 3 GHz, maximum.

Velocity of propagation: 69.5 percent, nominal.

Power rating: In accordance with the latest revision of MIL-DTL-17/93.

Shielding effectiveness: -60 dB at 3 GHz, minimum.

Operating temperature range: -55°C to +200°C

Inner conductor properties:

DC resistance (maximum at 20°C): 24.45 ohms per 100 feet.

Elongation: 10 percent, minimum.

Tensile strength: 50 klb_f /inch² , minimum.

Engineering notes: This cable is useful in general purpose, high temperature applications.

REQUIREMENTS:

Dimensions, configuration and description: See figure 1 and table 1.

Environmental and mechanical:

Visual and mechanical examination:

Eccentricity: 10 percent, maximum.

Adhesion of conductors: 1.0 pound, minimum; 4 pounds, maximum.

Cold bend: -55°C ± 2°C.

Stress crack resistance: + 230°C ± 5°C for 96 hours; mandrel size 7 ½ times the jacket diameter.

Dimensional stability: +200°C ± 5°C.

Inner conductor from core: .125 inch, maximum.

Inner conductor from jacket: .312 inch, maximum.

Flammability: Applicable.

Weight: 10.7 pounds per 1,000 feet, maximum.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OH 43218-3990	SIZE	CAGE CODE	DWG NO.
	A	037Z3	06017
		REV	PAGE 3

Electrical:

Test frequency: 50 MHZ to 3 GHz.

Spark test: 2,000 V rms, +25 percent, -0 percent.

Voltage withstanding: 2,000 V rms, minimum.

Corona extinction voltage: 1,000 V rms, minimum.

Characteristic impedance: 50 ± 2 ohms.

Attenuation: In accordance with the latest revision of MIL-C-17/93.

Structural return loss: In accordance with the latest revision of MIL-C-17/93.

Capacitance: 32 pF per foot, maximum (inner conductor to inner shield).

Capacitance unbalance: Not applicable.

Transmission unbalance: Not applicable.

Mechanically induced noise voltage: Not applicable.

Time delay: Not applicable.

Contamination: Not applicable.

Part or Identifying Number (PIN): 06017CF50FE.

Approved sources of supply are listed herein. Additional sources will be added as they become available. The vendors listed on the requirements drawing have agreed to this drawing and a certificate of compliance has been submitted to DSCC-VAI.

DSCC drawing PIN ^{1/}	Vendor CAGE number	Vendor reference PIN
06017CF50FE	68999	AA-9431
	12814	50-738CSSXE
	27478	H8675
	92607	30847/06025YX-1
	12515	17850

^{1/} Parts must be purchased to this DSCC PIN to assure that all performance requirements and tests are met.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OH 43218-3990	SIZE A	CAGE CODE 037Z3	DWG NO. 06017
		REV	PAGE 4

Vendor CAGE
Number

Vendor Name and
Address

68999

Times Microwave Systems
358 Hall Avenue
Wallingford, CT. 06492

12814

Thermax
225A N. Freeport Drive
Nogales, AZ. 85621

27478

Harbour Industries
4744 Shelburne Rd.
Shelburne, VT. 05482

92607

Tensolite Company
100 Tensolite Dr.
St. Augustine, FL. 32092

12515

Nexans
P.O. Box 909
Elm City, NC. 27822

DEFENSE SUPPLY CENTER, COLUMBUS
COLUMBUS, OH 43218-3990

SIZE

A

CAGE CODE

037Z3

REV

DWG NO.

06017

PAGE

5