

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	Page 3 - 3.7, changed manufacturer eligibility requirement. Pages 6 and 7 - Added an additional suggested source of supply.	21 Dec 87	David W. Withrow
B	Page 3 - Change paragraph reference. Page 6 - Added caution note concerning soldering temperature. Page 7 - Deleted one source of supply. Added a new source of supply.	22 Jun 90	D. Moore
C	Editorial changes throughout. Removed one source of supply.	8 Aug 2000	K. A. Cottongim
D	Editorial changes throughout.	28 July 2005	K. A. Cottongim
E	Editorial changes throughout. Added pure tin prohibition paragraphs 3.1.4 and 6.4. Deleted paragraph 4.2.3, Inspection of packaging.	2 Dec 2010	M. Radecki
F	Editorial changes throughout and add QR code.	26 May 2016	M. Radecki

CURRENT DESIGN ACTIVITY CAGE CODE 037Z3  
HAS CHANGED NAMES TO:  
DLA LAND AND MARITIME  
COLUMBUS, OHIO 43218-3990



Prepared in accordance with [ASME Y14.100](#)

REV STATUS OF PAGES	REV	F	F	F	F	F	F	F										
	PAGES	1	2	3	4	5	6	7										

PMIC N/A	PREPARED BY Randy Larson	DESIGN ACTIVITY DEFENSE ELECTRONICS SUPPLY CENTER, DAYTON, OH	
Original date of drawing  11 Sep 84	CHECKED BY David E. Moore	TITLE FILTERS AND CAPACITORS, RADIO FREQUENCY/ ELECTROMAGNETIC INTERFERENCE SUPPRESSION, HERMETICALLY SEALED ON ONE END ONLY	
	APPROVED BY Randy Larson		
	SIZE A	CODE IDENT. NO. 14933	DWG NO.  <b>84082</b>
	REV F		PAGE 1 OF 7



3.2 Operating temperature range. The operating temperature range shall be -55°C to +150°C.

3.3 Temperature rise. The temperature rise shall be +35°C maximum.

3.4 Electrical characteristics.

3.4.1 Rated voltage. The rated voltage shall be in accordance with [table I](#).

3.4.2 Rated current. The rated current shall be 10 amperes maximum.

3.4.3 Rated frequency. The rated frequency shall be dc.

3.4.4 Capacitance. Capacitance shall be in accordance with [table I](#).

3.4.5 Voltage and temperature limits of capacitance. Voltage and temperature limits of capacitance shall be +15, -40 percent.

3.4.6 Insulation resistance. Insulation resistance shall be as follows:

At +25°C: 1,000 megohm-microfarads or 100,000 megohms minimum, whichever is less.

At +125°C: 100 megohm-microfarads or 10,000 megohms minimum, whichever is less.

3.4.7 Insertion loss. Insertion loss shall be as follows:

At +25°C: In accordance with [table I](#).

At -55°C and +150°C: A 3 dB degradation from the +25°C value shall be allowed.

3.4.8 Voltage drop. Voltage drop shall be .10 V dc.

3.4.9 DC resistance. DC resistance shall be 0.01 ohm, maximum.

3.5 Environmental and mechanical requirements. The environmental and mechanical requirements shall be in accordance with [MIL-PRF-28861](#) for class B, non-hermetically sealed filters. The following details and exceptions shall apply.

3.5.1 Solderability of terminals. Solderability of terminals shall be in accordance with [MIL-PRF-28861](#), except temperature of solder shall be +300°C ± 5°C.

3.5.2 Resistance to soldering heat. Resistance to soldering heat shall be in accordance with [MIL-PRF-28861](#), except temperature of solder shall be +300°C ± 5°C.

3.5.3 Solderability of mounting termination. Solderability of mounting termination shall be in accordance with [MIL-PRF-28861](#), except temperature of solder shall be +300°C ± 5°C.

3.6 Product assurance level. Class B only.


3.7 Marking. Filters and capacitors shall not be marked. The unit package shall be marked in accordance with [MIL-STD-1285](#), except the part number shall be as specified in [1.2](#) with the manufacturer's name or code, date code, voltage rating, and current rating.

3.8 Manufacturer eligibility. To be eligible for listing as an approved source of supply, a manufacturer shall be listed on the [MIL-PRF-28861 Qualified Products List](#) for at least one part or, perform first article inspection in accordance with the [MIL-PRF-28861](#) qualification inspection requirements for class B.

3.9 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.10 Workmanship. Filters and capacitors shall be processed in such a manner as to be uniform in quality and shall be free from cold soldering, corrosion, pits, dents, cracks, rough or sharp edges, misalignments, and other defects that will affect life, serviceability, or appearance. Cracks in glass seals are not allowed; however, minor meniscus crazing is acceptable.

<b>DEFENSE ELECTRONICS SUPPLY CENTER, DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CODE IDENT NO. 14933</b>	<b>DWG NO. 84082</b>
		<b>REV F</b>	<b>PAGE 3</b>

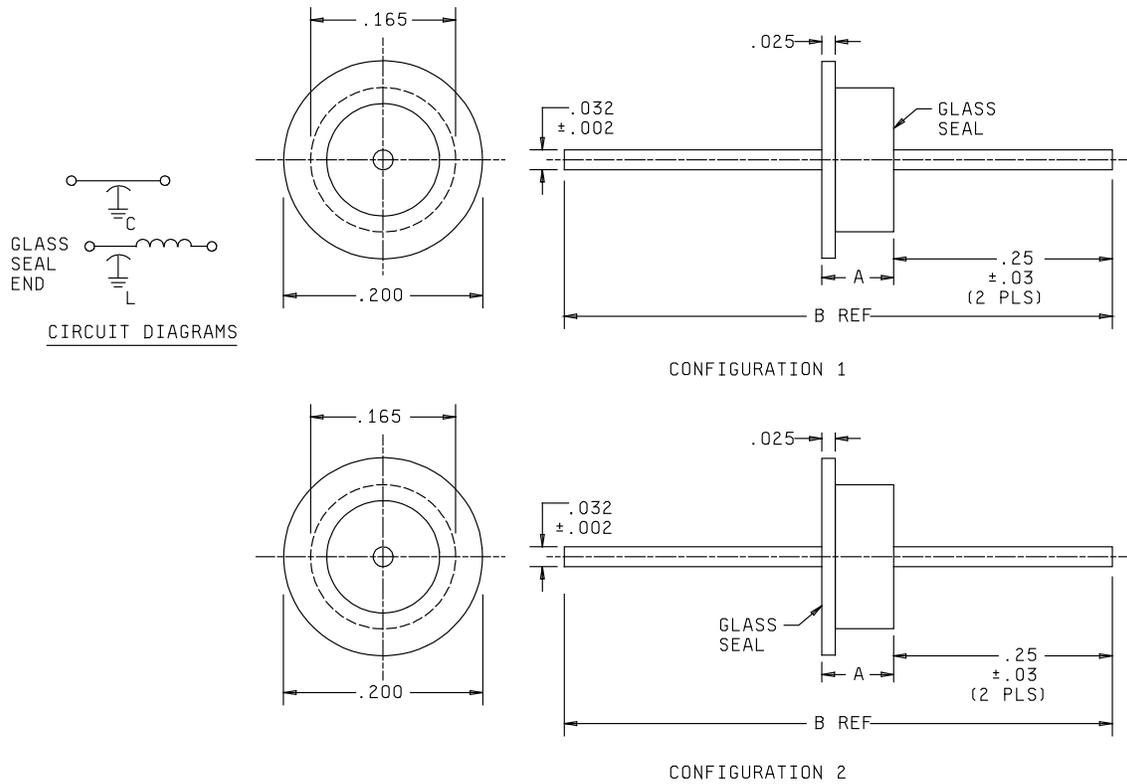

Inches	mm
.002	0.05
.005	0.13
.025	0.64
.030	0.76
.03	0.8
.032	0.81
.150	3.81
.165	4.19
.200	5.08
.250	6.35
.650	16.51
.750	19.05

Circuit diagram	Dimensions	
	A ±.005	B Ref
L	.250	.750
C	.150	.650

Dash No.	Configuration
001 through 012	1
013 through 024	2

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is  $\pm .005$ .
4. Circuit diagram is for information only.
5. Filters shall be supplied with 60/40 solder preform.
6. Potting on nonhermetically sealed end shall not extend beyond .030 inch from the filter body.
7. Filters shall be installed using the recommended installation methods in 6.6.1.3 (solder-in style paragraph) of [MIL-PRF-28861](#).

FIGURE 1. Circuit diagrams and case and hardware dimensions.

<b>DEFENSE ELECTRONICS SUPPLY CENTER, DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CODE IDENT NO. 14933</b>	<b>DWG NO. 84082</b>
		<b>REV F</b>	<b>PAGE 4</b>

TABLE I. Electrical characteristics.

Dash Number	Circuit	Rated voltage dc volts	Capacitance ( $\mu$ F) -0, +100 percent	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ 2/				
				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
001, 013 002, 014	L C	50 50	.065 .065	16 16	36 35	51 45	70 70	70 70
003, 015 004, 016	L C	100 100	.040 .040	12 12	33 31	49 43	65 65	70 70
005, 017 006, 018	L C	100 100	.027 .027	10 10	30 30	48 42	65 65	70 70
007, 019 008, 020	L C	100 100	.015 .015	7 7	25 25	45 40	60 55	60 60
009, 021 010, 022	L C	200 200	.010 .010	4 4	20 20	38 35	55 52	60 60
011, 023 012, 024	L C	200 200	.005 .005	---- ----	15 15	35 34	55 50	60 60

1/ For C circuits, insertion loss measurements shall be made under no load. For L circuits, insertion loss measurements shall be made under full load over the frequency range of 1 MHz to 10 MHz. Insertion loss measurements above and below this frequency range shall be made under no load.

2/ The insertion loss requirements between any two adjacent frequencies shall be that of the lower of the two frequencies in order to accommodate resonant dips.

#### 4. VERIFICATION

4.1 Qualification inspection. Qualification inspection is not required.

4.2 Conformance inspection.

4.2.1 Inspection of product for delivery. Inspection of product for delivery shall consist of groups A and B inspections of MIL-PRF-28861 for class B.

4.2.2 Certification. The acquiring activity, at its discretion, may accept a certification of compliance with group B requirements in lieu of performing group B tests (see 6.2c).

#### 5. PACKAGING

5.1 Packaging requirements. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the military services' system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

<b>DEFENSE ELECTRONICS SUPPLY CENTER, DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CODE IDENT NO. 14933</b>	<b>DWG NO. 84082</b>
		<b>REV F</b>	<b>PAGE 5</b>

## 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Filters conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. This drawing is intended exclusively to prevent the proliferation of unnecessary duplicate specifications, drawings, and stock catalog listings. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-28861, this drawing becomes obsolete and will not be used for new design. The QPL-28861 product shall be the preferred item for all applications.

6.2 Acquisition data. The acquisition document should specify the following:

- a. Complete PIN (see 1.2).
- b. Requirements for delivery of one copy of the conformance inspection data with each shipment of parts by the manufacturer.
- c. Whether the manufacturer performs the group B tests or provides certification of compliance with group B requirements.
- d. Requirements for notification of change of product to acquiring activity, if applicable.
- e. Requirements for packaging and packing.

6.3 Soldering temperature. Caution: These devices should not be exposed to soldering temperatures exceeding 300°C. Exposure time to soldering temperature of 300°C should not exceed one minute.

6.4 Pure tin prohibition. Pure tin is prohibited since it may result in tin whisker growth. The use of alloys with tin content greater than 97 percent may exhibit tin whisker growth problems after manufacture. Tin whiskers may occur anytime from a day to years after manufacture and can develop under typical operating conditions on products that use such materials. Conformal coatings applied over top of a whisker-prone surface will not prevent the formation of tin whiskers. Alloys of 3 percent lead, by mass, have shown to inhibit the growth of tin whiskers. For additional information on this matter, refer to [ASTM-B545](#) (Standard Specification for Electrodeposited Coating of Tin).

6.5 Users of record. Coordination of this document for future revisions is coordinated only with the approved source(s) of supply and the users of record of this document. Requests to be added as a recorded user of this drawing may be achieved online at [capacitorfilter@dla.mil](mailto:capacitorfilter@dla.mil) or if in writing to: DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990 or by telephone (614) 692-0551 or DSN 850-0551.

6.6 Replaceability. Filters covered by this drawing will replace the same commercial device covered by contractor-prepared specification or drawing.

6.7 Approved sources of supply. Approved source(s) of supply are listed herein. Additional sources will be added as they become available. Assistance in the use of this drawing may be obtained online at [capacitorfilter@dla.mil](mailto:capacitorfilter@dla.mil), or by contacting DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990 or by telephone (614) 692-0551 or DSN 850-0551.

6.8 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

<b>DEFENSE ELECTRONICS SUPPLY CENTER, DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CODE IDENT NO. 14933</b>	<b>DWG NO. 84082</b>
		<b>REV F</b>	<b>PAGE 6</b>

DLA Land and Maritime drawing PIN 84082-	Vendor similar designation or type number <u>1/</u>	Vendor CAGE	Vendor name and address
001	YS2C2-653HM	59942	AVX Filters Corporation 11144 Penrose Street Sun Valley, CA 91352-39021
002	YS1C2-653HM	59942	
003	YS2A2-403HM	59942	
004	YS1A2-403HM	59942	
005	YS2A2-273HM	59942	
006	YS1A2-273HM	59942	
007	YS2A2-153HM	59942	
008	YS1A2-153HM	59942	
009	YS2B2-103HM	59942	
010	YS1B2-103HM	59942	
011	YS2B2-502HM	59942	
012	YS1B2-502HM	59942	
013	YR2C2-653HM	59942	
014	YR1C2-653HM	59942	
015	YR2A2-403HM	59942	
016	YR1A2-403HM	59942	
017	YR2A2-273HM	59942	
018	YR1A2-273HM	59942	
019	YR2A2-153HM	59942	
020	YR1A2-153HM	59942	
021	YR2B2-103HM	59942	
022	YR1A2-103HM	59942	
023	YR2B2-502HM	59942	
024	YR1B2-502HM	59942	

1/ Parts must be purchased to the DLA Land and Maritime PIN to assure that all performance requirements and tests are met.

<b>DEFENSE ELECTRONICS SUPPLY CENTER, DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CODE IDENT NO. 14933</b>	<b>DWG NO. 84082</b>
		<b>REV F</b>	<b>PAGE 7</b>