REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
A	Delete paragraph 1.1 and 1.2 in their entirety and substitute new paragraph 1.1 as printed on page 2. Renumber paragraph 1.3 to 1.2.	8 May 85	S. Searcy
B	Change vendor similar part numbers.	7 Mar 86	S. Searcy
C	Increase acceleration to 75 g's. Add new manufacturer eligibility requirements.	11 Sep 86	S. Searcy
D	Changes in accordance with NOR 5945-E087.	25 Jan 00	K. Cottongim
E	Validation and update.	17 Sep 03	K. Cottongim
F	Incorporated boilerplate updates.	3 Jan 08	Michael A. Radecki

CURRENT DESIGN ACTIVITY CAGE CODE 037Z3
DEFENSE LOGISTICS AGENCY
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 43218-3990

Prepared in accordance with ASME Y14.100

Source control drawing

REV STATUS OF PAGES																		
	REV	F	F	F	F	F	F	F	F									
	PAGES	1	2	3	4	5	6	7	8									

PMIC N/A	**PREPARED BY** Richard A. Yannitti	**DESIGN ACTIVITY** **DEFENSE ELECTRONICS SUPPLY CENTER** **DAYTON, OH 45444-5000**
Original date of drawing 3 April 1985	**CHECKED BY** Max E. Lewis	**TITLE** RELAYS, ELECTROMAGNETIC, HIGH VIBRATION, DPDT, LOW LEVEL TO 1.0 AMPERE (SIMILAR TO MIL-PRF-39016/9)
	APPROVED BY Steven B. Searcy	
	SIZE A / **CODE IDENT. NO.** 14933	**DWG NO.** 84172
	REV F	**PAGE** 1 **OF** 8

1. SCOPE

1.1 Scope. This drawing describes the requirements for hermetically sealed, electromagnetic relays. This drawing provides a level of reliability assurance for acquisition of relays in accordance with MIL-PRF-39016 except as specified herein (see 3.4.1, 3.4.2, and 3.4.3). The relays supplied to this drawing shall be subjected to all the tests as specified in the group A table of MIL-PRF-39016 for an M-level relay (see 4.2).

1.2 Part or Identifying Number (PIN). The complete PIN shall be as follows:

84172	-001
Drawing number	Dash number (see table I)

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

FEDERAL SPECIFICATIONS

A-A-55485/5 - Mounting Pads, Electrical-Electronic Component, Lead Conversion, .200 or .230 Diameter Pin Center to a Grid Pattern.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-39016 - Relays, Electromagnetic, Established Reliability, General Specification For.
MIL-PRF-39016/9 - Relays, Electromagnetic, Established Reliability, DPDT, Low Level to 1.0 Ampere.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-1285 - Marking of Electrical and Electronic Parts.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-39016, MIL-PRF-39016/9, and as specified herein.

3.2 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-39016, MIL-PRF-39016/9, and herein (see figures 1 and 2).

3.3 Coil data (see table I).

3.3.1 Operate time. Operate time shall be 6.0 milliseconds maximum with rated coil voltage.

3.3.2 Release time. Release time shall be 2.0 milliseconds maximum from rated coil voltage.

3.4 Environmental characteristics. Relays shall meet all environmental requirements as specified in MIL-PRF-39016, MIL-PRF-39016/9, and herein.

3.4.1 Vibration (sinusoidal). As specified in MIL-PRF-39016 and MIL-PRF-39016/9, except vibration level shall be 100 g's and frequency range shall be 140 to 2,000 Hz.

3.4.2 Shock (specified pulse). As specified in MIL-PRF-39016 and MIL-PRF-39016/9, except peak value shall be 150 g's for 11 milliseconds.

3.4.3 Acceleration. As specified in MIL-PRF-39016 and MIL-PRF-39016/9, except peak value shall be 75 g's.

3.5 Conformance requirements. Relays furnished under this drawing shall have been subjected to, and passed all the requirements, tests, and inspections as specified herein.

3.5.1 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-39016 and 4.2 herein.

3.6 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3. 7 Manufacturer eligibility. To be eligible for listing as an approved source of supply, a manufacturer shall be listed on the MIL-PRF-39016 Qualified Product List for at least one part, or perform the group A and group C inspections specified herein on a sample of parts agreed upon by the manufacturer and DSCC-VA.

3.8 Certificate of compliance. A certificate of compliance shall be required from manufacturers requesting to be an approved source of supply.

3.9 Pure tin. The use of pure tin, as an underplate or final finish is prohibited both internally and externally. Tin content of resistor components and solder shall not exceed 97 percent, by mass. Tin shall be alloyed with a minimum of 3 percent lead, by mass (see 6.4).

3.10 Physical. Physical requirements of the relays shall be as specified in MIL-PRF-39016, MIL-PRF-39016/9, and herein (see table I and figures 1 and 2).

3.10.1 Marking. Relays shall be marked in accordance with minimum marking requirements of MIL-PRF-39016, except the part number shall be in accordance with 1.2 herein. The "M39016/9-XXXX" part number shall not be used.

3.11 Workmanship. The relay shall be uniform in quality and free from any defects that will affect life, serviceability, or appearance.

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.017	0.43
.031	0.79
.035	0.89
.200	5.08
.275	6.99
.280	7.11
.335	8.51
.370	9.40

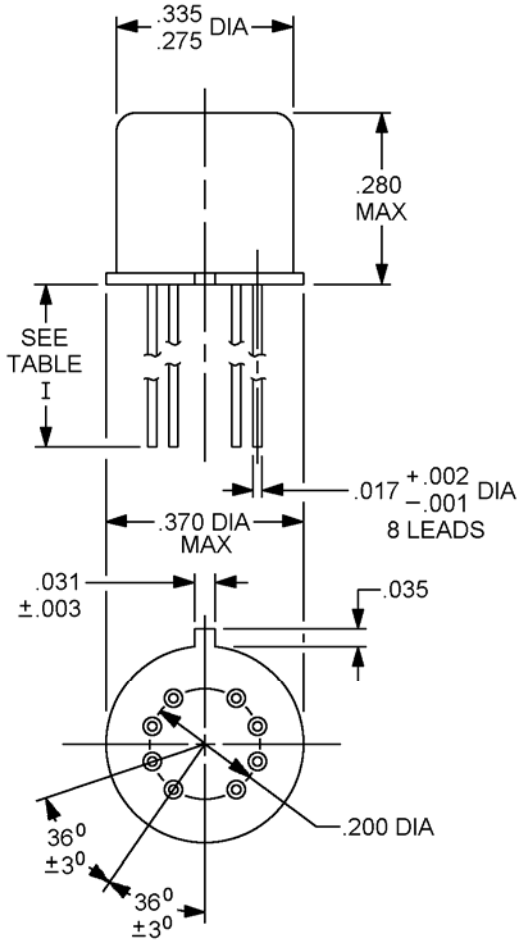

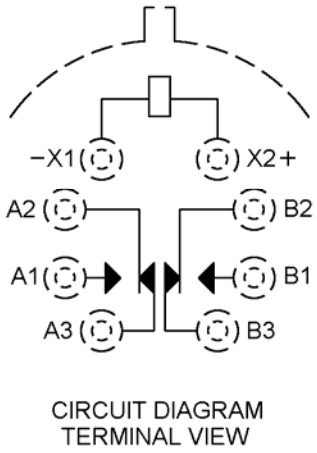

CIRCUIT DIAGRAM
TERMINAL VIEW

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .010 (0.25 mm).
4. Terminal numbers shown above are for reference only. Numbers do not appear on relay.
5. Coil symbol optional in accordance with MIL-STD-1285.
6. Circuit diagram shown on part is the terminal view.
7. Relays shall have a (+) plus sign placed on the circuit diagram as shown.

FIGURE 1. Interface and physical dimensions.

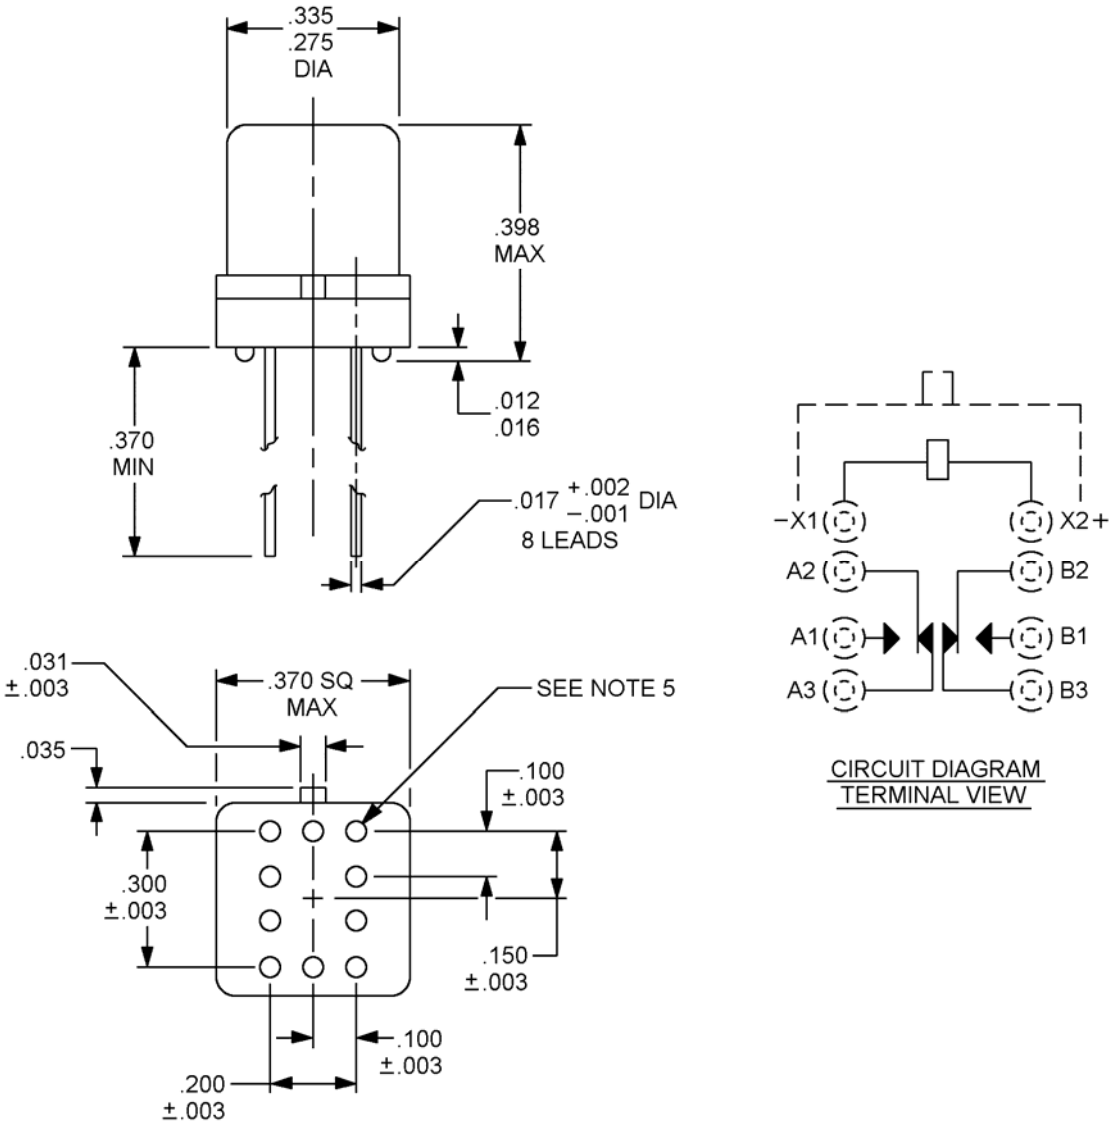

FIGURE 2. Interface and physical dimensions relays supplied with spreader pad.

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.012	0.30
.016	0.41
.017	0.43
.031	0.79
.035	0.89
.100	2.54
.150	3.81
.200	5.08
.275	6.99
.300	7.52
.335	8.51
.370	9.40
.398	10.11

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .010 (0.25 mm).
4. Spreader pads shall comply with the requirements of A-A-55485/5-003.
5. Dimensions and tolerances shown for the bottom view of the spreader pad are for the center to center locations of the holes in the spreader pad.
6. Shape optional within envelope dimension.
7. Coil symbol optional in accordance with MIL-STD-1285.
8. Terminal numbers shown above are for reference only. Numbers do not appear on relay.
9. Circuit diagram shown on part is the terminal view.
10. Relays shall have a (+) plus sign placed on the circuit diagram as shown.

FIGURE 2. Interface and physical dimension relays supplied with spreader pad - Continued.

TABLE I. Dash numbers and characteristics. 1/

Dash numbers 84172-			Coil voltage (V dc) 2/		At +25°C				Over temperature range		
Lead length .500 Min	Lead length .187 +.040 -.010	Spreader pads (figure 2) 3/	Rated	Max	Coil resistance ohms ±10%	Pickup voltage (V dc) max	Hold voltage (V dc)	Drop-out voltage (V dc)	Pickup voltage (V dc) max	Hold voltage (V dc)	Drop-out voltage (V dc)
001	007	013	5.0	5.8	50	3.5	1.4	0.22	4.6	2.5	0.14
002	008	014	6.0	8.0	70	4.2	2.0	0.27	5.5	3.2	0.18
003	009	015	9.0	12.0	155	6.2	3.0	0.54	8.2	4.9	0.35
004	010	016	12.0	16.0	235	8.3	4.0	0.63	11.0	6.5	0.41
005	011	017	18.0	24.0	610	12.5	6.0	0.77	16.5	10.0	0.59
006	012	018	26.5	32.0	1,130	18.0	8.0	1.23	22.0	13.0	0.89

1/ Each relay possesses high level and low level capabilities. However, relays previously tested or used above 10 mA resistive at 6 V dc maximum or peak ac open circuits are not recommended for subsequent use in low level applications.

2/ CAUTION: The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.

3/ Relays supplied with spreader pads (-013 through -018) shall have the pad rigidly attached.

4. VERIFICATION

4.1 Sampling and inspection. Unless otherwise specified, sampling and inspection procedures shall be performed in accordance with MIL-PRF-39016, except as modified herein.

4.2 Conformance inspection. Conformance inspection shall be in accordance with group A testing of MIL-PRF-39016. Group A testing shall be performed on each inspection lot and manufacturers shall keep lot records for 3 years (minimum), monitor for compliance to the prescribed procedures, and observe that satisfactory manufacturing conditions and records on lots are maintained for these relays.

4.2.1 Group A inspection. Group A inspection shall consist of all tests specified in MIL-PRF-39016, for failure rate level "M". For seal test, the radioisotope procedure or mass spectrometer method shall be performed.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.3). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Notes. Only definitions of the notes specified in MIL-PRF-39016 will apply to this drawing.

6.2 Intended use. Relays conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. This drawing is intended exclusively to prevent the proliferation of unnecessary duplicate specifications, drawings, and stock catalog listings. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-39016, this drawing will be inactivated and will not be used for new design. The QPL-39016 product will be the preferred item for all applications.

6.3 Ordering data. The contract or purchase order should specify the following:

a. Complete PIN (see 1.2).

b. Requirements for delivery of one copy of the conformance inspection data or certificate of compliance that parts have passed conformance inspection with each shipment of parts by the manufacturer.

c. Requirements for packaging and packing.

6.4 Tin whisker growth. The use of alloys with tin content greater than 97 percent, by mass, may exhibit tin whisker growth problems after manufacture. Tin whiskers may occur anytime from a day to years after manufacture and can develop under typical operating conditions, on products that use such materials. Conformal coatings applied over top of a whisker-prone surface will not prevent the formation of tin whiskers. Alloys of 3 percent lead, by mass, have shown to inhibit the growth of tin whiskers. For additional information on this matter, refer to ASTM-B545 (Standard Specification for Electrodeposited Coatings of Tin).

6.5 Users of record. Coordination of this document for future revisions is coordinated only with the approved source(s) of supply and the users of record of this document. Requests to be added as a recorded user of this drawing may be achieved online at mailto:relay@dla.mil or if in writing to: Defense Supply Center, Columbus, ATTN: DSCC/VA?, Post Office Box 3990, Columbus, OH 43218-3990 or by telephone (614) 692-4481 or DSN 850-4481.

6.6 Approved source(s) of supply. Approved source(s) of supply are listed herein. Additional sources will be added as they become available. Assistance in the use of this drawing may be obtained online at mailto:relay@dla.mil, or by contacting Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus, OH 43218-3990 or by telephone (614) 692-4481 or DSN 850-4481.

DSCC drawing PIN 84172	Vendor similar designation or type number 1/	Vendor CAGE	Vendor name and address
-001	MAVC-5474-1	58614	CII Technologies Incorporated 1200 Ridgefield Boulevard Suite 200 Asheville, NC 28806-2280 Phone: (800) 806-0480 Plant: Tyco Electronics, CII 1396 Charlotte Highway Fairview, NC 28730-8544 Phone: (828) 338-1011
-002	MAVC-5474-2	"	
-003	MAVC-5474-3	"	
-004	MAVC-5474-4	"	
-005	MAVC-5474-5	"	
-006	MAVC-5474-6	"	
-007	MAVP-5475-7	"	
-008	MAVP-5475-8	"	
-009	MAVP-5475-9	"	
-010	MAVP-5475-10	"	
-011	MAVP-5475-11	"	
-012	MAVP-5475-12	"	
-013	MAVC-5476-13S	"	
-014	MAVC-5476-14S	"	
-015	MAVC-5476-15S	"	
-016	MAVC-5476-16S	"	
-017	MAVC-5476-17S	"	
-018	MAVC-5476-18S	"	

1/ Parts must be purchased to the DSCC PIN to assure that all performance requirements and tests are met.