

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	Add new vendors	88-03-31	D. WITHROW
B	Added new vendors. Changed some dimensions on.	88-08-22	D. MOORE
C	Changes in accordance with NOR 5905-R004-93	93-05-28	D. MOORE
D	Update and validation of drawing. Editorial changes throughout.	00-08-24	K. COTTONGIM
E	Added Pure Tin Prohibition, Pulse Application and Manufacturer Eligibility paragraphs Editorial changes throughout	11-06-90	M. RADECKI
F	Update Hyperlinks. Editorial changes throughout.	18-11-09	M. RADECKI

CURRENT DESIGN ACTIVITY CAGE CODE 037Z3  
HAS CHANGED NAMES TO:  
DLA LAND AND MARITIME  
COLUMBUS, OHIO 43218-3990



Prepared in accordance with [ASME Y14.100](#)

Selected Item Drawing


<b>REV STATUS OF PAGES</b>	<b>REV</b>	F	F	F	F	F	F	F	F	F								
	<b>PAGES</b>	1	2	3	4	5	6	7	8	9								

<b>PMIC N/A</b>	<b>PREPARED BY</b> Allen R. Knox	<b>DEFENSE ELECTRONICS SUPPLY CENTER, DAYTON, OH</b>	
Original date of drawing:  87-07-21	<b>CHECKED BY</b> David W. Withrow	<b>TITLE</b>  <b>RESISTOR NETWORK, 8 PIN, SINGLE-IN-LINE PACKAGE (SIP)</b>	
	<b>APPROVED BY</b> David E. Moore		
	<b>SIZE</b> <b>A</b>	<b>CODE IDENT. NO.</b> <b>14933</b>	<b>DWG NO.</b>  <b>87031</b>
	<b>REV</b> F		<b>PAGE 1 OF 9</b>

1. SCOPE

1.1 Scope. This drawing describes the requirements for a 8 pin, single-in-line, resistor network.

1.2 Part or Identifying Number (PIN). The complete PIN is as follows:

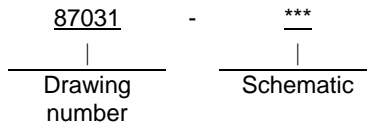

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the cited in the solicitation or contract (see 6.2).

DEPARTMENT OF DEFENSE SPECIFICATION

**MIL-PRF-83401** - Resistors Networks, Fixed, Film, and Capacitor-Resistor Networks, Ceramic Capacitor and Fixed Film Resistors, General Specification For.

DEPARTMENT OF DEFENSE STANDARDS

**MIL-STD-1285** - Marking of Electrical and Electronic Parts.

(Copies of these documents are available online at <https://quicksearch.dla.mil>.)


2.2 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence unless otherwise noted. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with **MIL-PRF-83401** and as specified herein.

3.2 Interface and physical dimensions. The resistor shall meet the interface and physical dimensions as specified in **MIL-PRF-83401** and herein (see figure 1).

<b>DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CAGE CODE 14933</b>	<b>DWG NO. 87031</b>
		REV F	PAGE 2

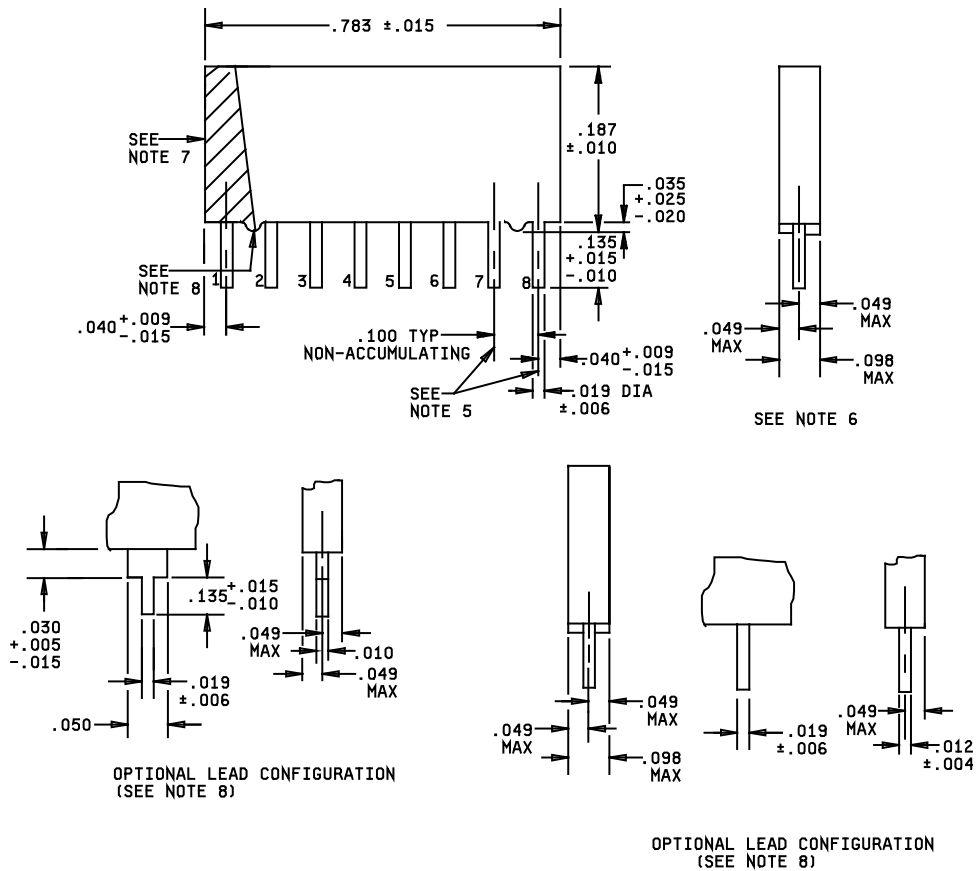

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.004	0.10	.010	0.25	.019	0.48	.035	0.89	.052	1.32	.135	3.43
.005	0.13	.012	0.30	.020	0.51	.040	1.02	.074	1.88	.187	4.75
.006	0.15	.015	0.38	.025	0.64	.049	1.24	.098	2.49	.783	19.89
.009	0.23	.017	0.43	.030	0.76	.050	1.27	.100	2.54		

**NOTES:**

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are  $\pm .005$  (0.13 mm).
4. The picturization of the styles above is given as representative of the envelope of the item. Slight deviations from the outline shown, which are contained within the envelope and do not alter the functional aspects of the device, are acceptable.
5. Terminal centerline to centerline measurements made at point of emergence of the lead from the body.
6. Measurement made at point of emergence of the lead from the body.
7. Pin 1 locator shall be a bevel, stripe, notch, or a dot above pin number 1 in the shaded area.
8. If the standoffs are located on the body, a minimum of two standoffs are required as illustrated. As an option, additional standoffs maybe located on the body of the resistor network. If leads with standoffs are used, standoffs on the body are not required.

FIGURE 1. Resistor network.

<b>DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CAGE CODE 14933</b>	<b>DWG NO. 87031</b>
		<b>REV F</b>	<b>PAGE 3</b>

3.3 Electrical characteristics.

3.3.1 Resistance. The resistance value shall be as specified on figure 2.

3.3.2 Resistance tolerance. The resistance tolerance shall be (F)  $\pm 1$  percent.

3.3.3 Resistor power rating. The resistor power rating for individual resistors shall be 100 milliwatts maximum at 70°C.

3.3.4 Package power rating. The package power rating shall be 250 milliwatts maximum at 70°C. For temperatures in excess of 70°C, derated in accordance with [MIL-PRF-83401](#).

3.3.5 Operating voltage. Each resistor element shall have a maximum operating voltage of 50 V dc or ac rms.

3.3.6 Operating temperature. The operating temperature shall be -55°C to +125°C.

3.3.7 Resistance temperature characteristic. The resistance temperature characteristic shall not exceed  $\pm 100$  ppm/°C.

3.4 Characteristic. The characteristic shall be in accordance with [MIL-PRF-83401](#), characteristic K.

3.5 Pure tin. The use of pure tin, as an underplate or final finish, is prohibited both internally and externally. Tin content of resistor components and solder shall not exceed 97 percent, by mass. Tin shall be alloyed with a minimum of 3 percent lead, by mass (see 6.3).

3.6 Environmental requirements. The environmental requirements shall be in accordance with [MIL-PRF-83401](#), characteristic K.

3.7 Marking. Marking shall be in accordance with [MIL-STD-1285](#), except the PIN shall be as specified in 1.2, with the manufacturer's CAGE number or trade mark and date code.

3.8 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.9 Manufacturer eligibility. To be eligible for listing as an approved source of supply, a manufacturer shall be listed on the [MIL-PRF-83401 Qualified Products List](#) for at least one part, or perform the group A and group B inspections specified herein on a sample of parts agreed upon by the manufacturer and DLA Land and Maritime - VAT.

3.9.1 Certificate of compliance. A certificate of compliance shall be required from manufacturers requesting to be listed as approved sources of supply.

3.10 Workmanship. Resistors shall be uniform in quality and free from any defects that will affect life, serviceability, or appearance.


4. VERIFICATION

4.1 Product assurance program. The product assurance program specified in [MIL-PRF-83401](#) is not applicable to this document.


4.2 Qualification inspection. Qualification inspection is not applicable to this document.

<b>DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CAGE CODE 14933</b>	<b>DWG NO. 87031</b>
		REV F	PAGE 4


SCHEMATIC 001

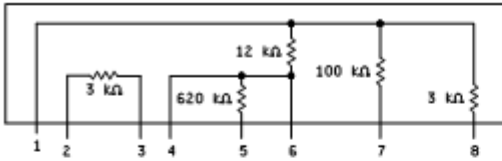


SCHEMATIC 007

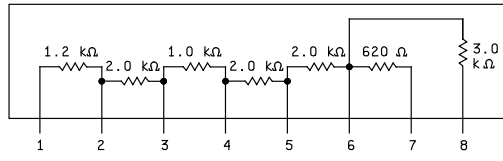


SCHEMATIC 002

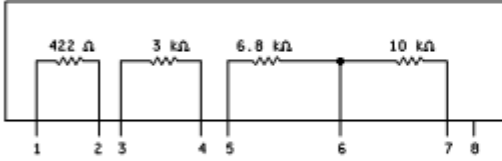


SCHEMATIC 008

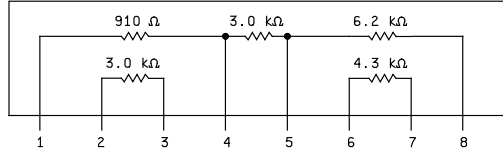


SCHEMATIC 003

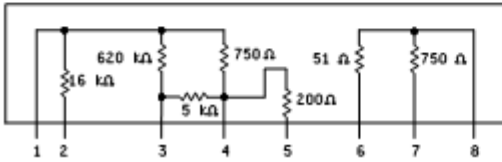


SCHEMATIC 009

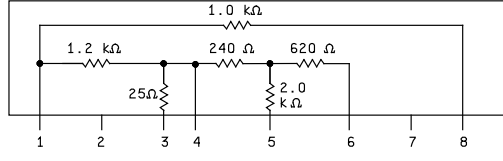


SCHEMATIC 004

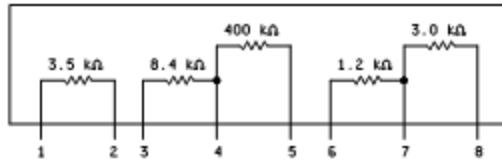


SCHEMATIC 010

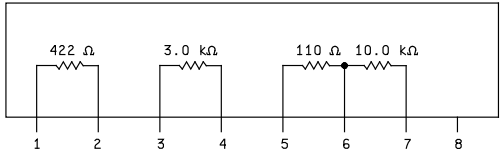


SCHEMATIC 005

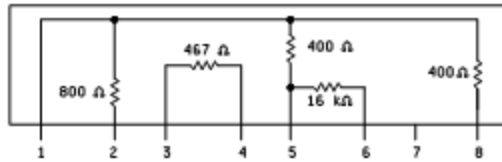

SCHEMATIC 011

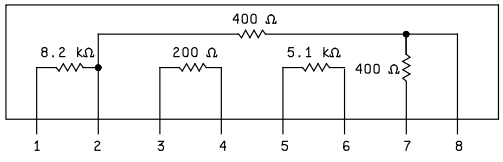

SCHEMATIC 006

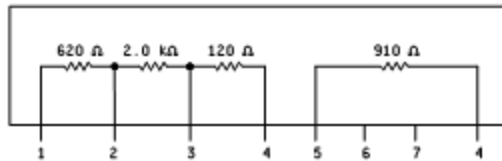

SCHEMATIC 012

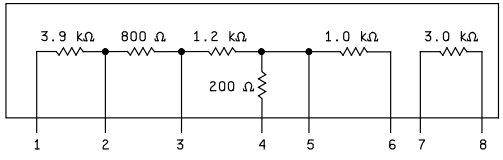


FIGURE 2. Schematics.

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO

SIZE  
A


CAGE CODE  
14933

DWG NO.  
87031


REV F

PAGE 5


SCHEMATIC 013

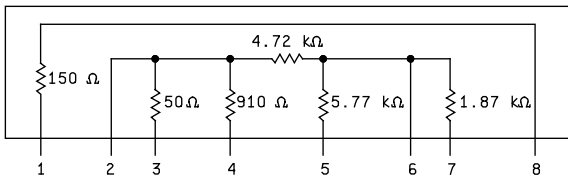


SCHEMATIC 019

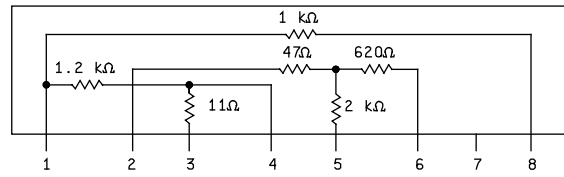


SCHEMATIC 014

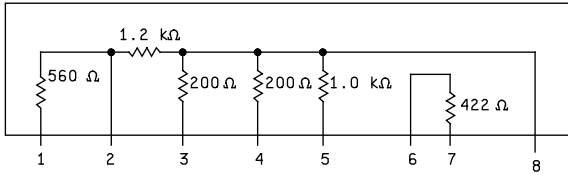


SCHEMATIC 020

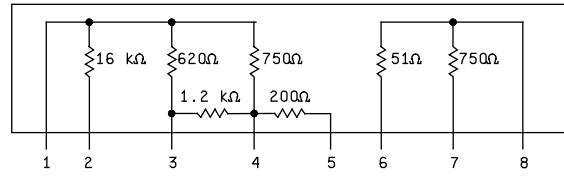


SCHEMATIC 015

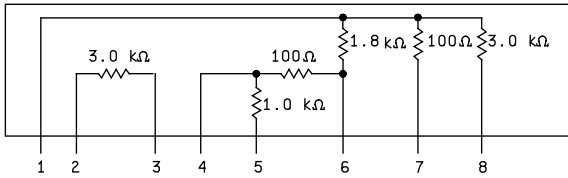


SCHEMATIC 021

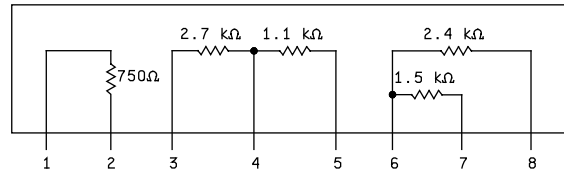


SCHEMATIC 016

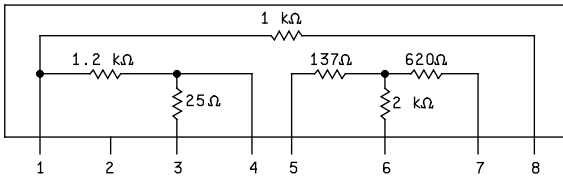


SCHEMATIC 022

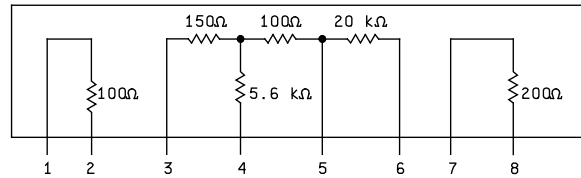


SCHEMATIC 017

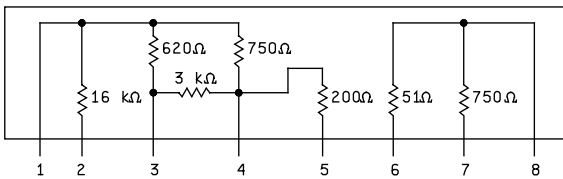

SCHEMATIC 023

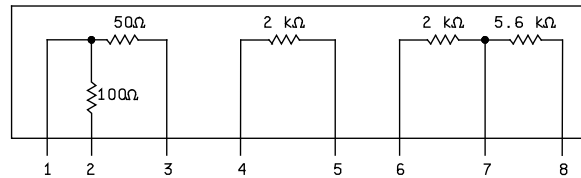

SCHEMATIC 018

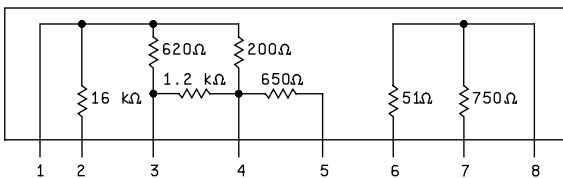

SCHEMATIC 024

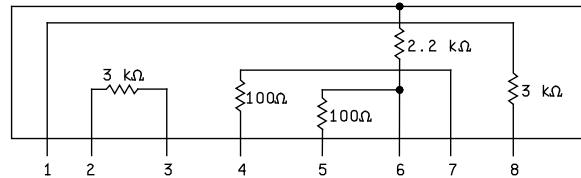


FIGURE 2. Schematics - Continued.

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO

SIZE  
A


CAGE CODE  
14933

DWG NO.  
87031


REV F

PAGE 6


SCHEMATIC 025

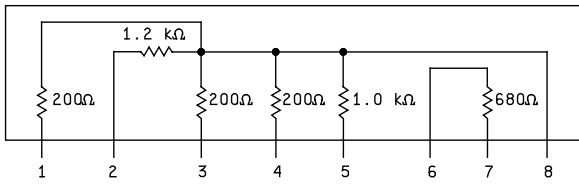


SCHEMATIC 031

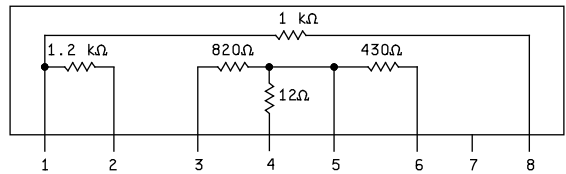


SCHEMATIC 026

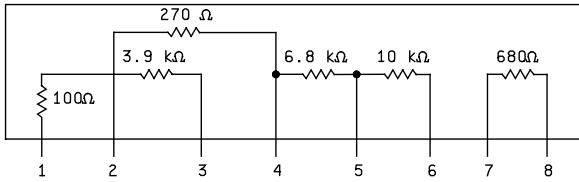


SCHEMATIC 032

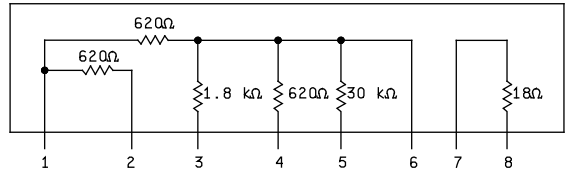


SCHEMATIC 027

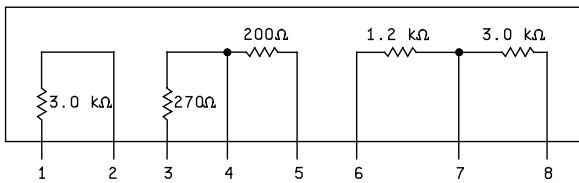


SCHEMATIC 033

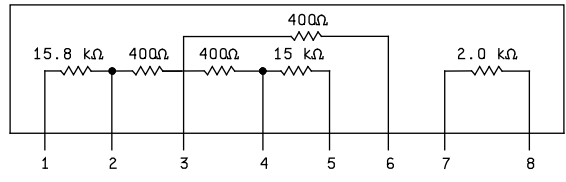


SCHEMATIC 028

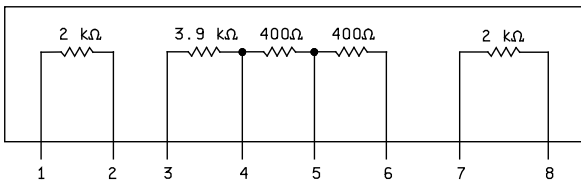


SCHEMATIC 034

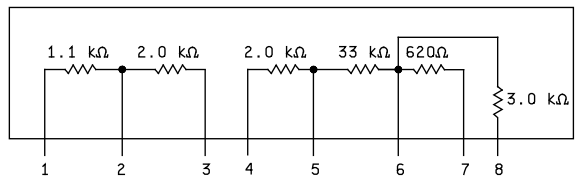


SCHEMATIC 029

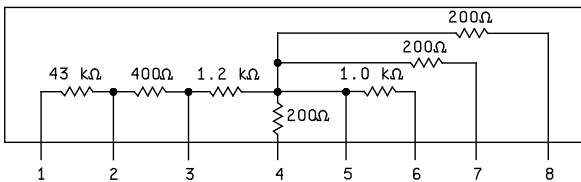

SCHEMATIC 035

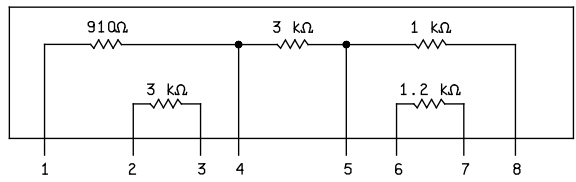

SCHEMATIC 030

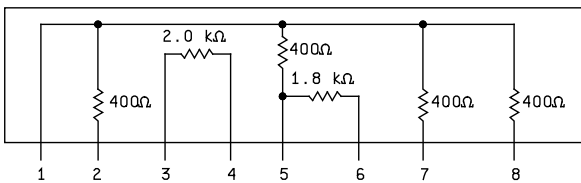

SCHEMATIC 036

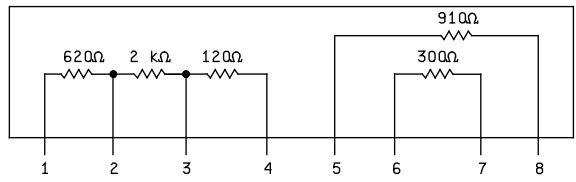


FIGURE 2. Schematics - Continued.

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO

SIZE  
A


CAGE CODE  
14933

DWG NO.  
87031

REV F

PAGE 7

SCHEMATIC 037

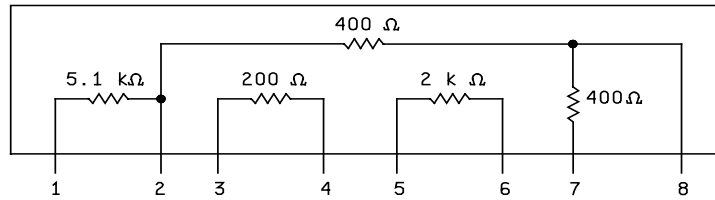

SCHEMATIC 038

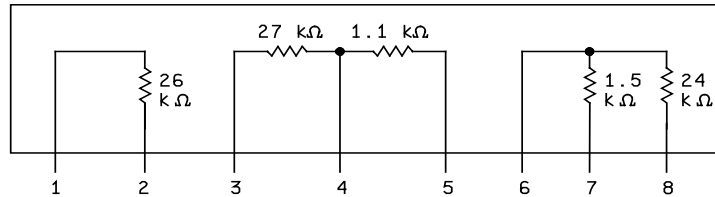


FIGURE 2. Schematics - Continued.

4.2.1 Failure rate qualification. The failure rate qualification specified in MIL-PRF-83401 is not applicable to this document.

4.3 Conformance inspections.

4.3.1 Inspection of product for delivery. Inspection of product for delivery shall consist of group A and group B inspections of MIL-PRF-83401.

4.3.2 Certification. The acquiring activity, at its discretion, may accept a certificate of compliance with group B requirements in lieu of performing group B tests (see 6.2d).

4.4 Inspection of packaging. Inspection of packaging shall be in accordance with MIL-PRF-83401.

4.7 Visual and mechanical examination. Resistors shall be examined to verify that the materials, design, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements of MIL-PRF-83401.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military services system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Resistor networks are used in surface mounting applications where space is a major concern.

<p><b>DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO</b></p>	<p><b>SIZE A</b></p>	<p><b>CAGE CODE 14933</b></p>	<p><b>DWG NO. 87031</b></p>
		<p>REV F</p>	<p>PAGE 8</p>



6.2 Ordering data. The contract or purchase order should specify the following:

- a. Complete DLA Land and Maritime CAGE CODE and PIN (see 1.2).
- b. Requirements for delivery; One copy of the conformance inspection data or a certificate of compliance that parts have passed conformance inspection with each shipment of parts by the manufacturer.
- c. Packaging requirements (see 5.1). (i.e. Electrostatic discharge sensitive packaging).
- d. Whether the manufacturer performs the group B tests or provides certificate of compliance with group B (see 4.3.2).

6.3 Tin whisker growth. The use of alloys with tin content greater than 97 percent, by mass, may exhibit tin whisker growth problems after manufacture. Tin whiskers may occur anytime from a day to years after manufacture and can develop under typical operating conditions, on products that use such materials. Conformal coatings applied over top of a whisker-prone surface will not prevent the formation of tin whiskers. Alloys of 3 percent lead, by mass, have shown to inhibit the growth of tin whiskers. For additional information on this matter, refer to [ASTM-B545](#) (Standard Specification for Electrodeposited Coatings of Tin).

6.4 Pulse applications. Designers are CAUTIONED on using the above resistors in high power pulse applications. Since they have not been qualified nor tested for such applications, damage and premature failure are possible

6.5 Electrostatic charge. Under several combinations of conditions, these resistors can be electrically damaged, by electrostatic charges, and drift from specified value. Users should consider this phenomena when ordering or shipping resistors. Direct shipment to the Government is controlled by [MIL-DTL-39032](#) that specifies a preventive packaging procedure.

6.6 User of record. Coordination of this document for future revisions is coordinated only with the approved sources of supply and the users of record of this document. Requests to be added as a recorded user of this drawing may be achieved on-line at [resistor@dla.mil](mailto:resistor@dla.mil) or in writing to: DLA Land and Maritime - VAT, P.O. Box 3990, Columbus, OH 43218-3990 or by telephone (614) 692-8754 or DSN 850-8754.

6.7 Approved source of supply. Approved sources of supply are listed herein. Additional sources will be added as they become available. Assistance in the use of this drawing may be obtained on on-line at [resistor@dla.mil](mailto:resistor@dla.mil) or contact DLA Land and Maritime - VAT, P.O. Box 3990, Columbus, OH 43218-3990, or by telephone (614) 692-8754 or DSN 850-8754.

DLA Land and Maritime drawing PIN	Vendor similar designation or type number <sup>1/</sup>	Vendor CAGE	Vendor's name and address
87031-***	4***	57027	IRC, Inc. 4222 S. Staples Street Corpus Christi, TX 78411-2702
	MSP08A-**-*** and 8L series	91637	Vishay - Dale P.O. Box 609 Columbus, NE 656001-0609

<sup>1/</sup> Parts must be purchased to the DLA Land and Maritime CAGE Code and PIN to assure that all performance requirements and tests are met.

<b>DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CAGE CODE 14933</b>	<b>DWG NO. 87031</b>
		<b>REV F</b>	<b>PAGE 9</b>