

-REVISIONS			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Table I; For the Input-output isolation current test (I <sub>I-O</sub> ) and Channel-channel isolation current test (I <sub>ISO</sub> ) changed "RH ≤ 45 %" to "RH ≤ 65 %" in the conditions . Editorial changes throughout. -sld	04-09-15	Raymond Monnin
B	Added case outline Z. Updated drawing to reflect the latest requirements. -sld	05-08-26	Raymond Monnin
C	Updated drawing paragraphs. -sld	12-01-17	Charles F. Saffle




REV																				
SHEET																				
REV																				
SHEET																				
REV STATUS	REV	C	C	C	C	C	C	C	C	C	C	C	C							
OF SHEETS	SHEET	1	2	3	4	5	6	7	8	9	10									
PMIC N/A	PREPARED BY Gary Zahn	<p align="center"><b>DLA LAND AND MARITIME</b>  <b>COLUMBUS, OHIO 43218-3990</b>  <a href="http://www.landandmaritime.dla.mil/">http://www.landandmaritime.dla.mil/</a></p> <p align="center"><b>MICROCIRCUIT, HYBRID, LINEAR, POWER MOSFET, DUAL CHANNEL, OPTOCOUPLER</b></p>																		
<p align="center"><b>STANDARD MICROCIRCUIT DRAWING</b></p> <p align="center">THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE</p> <p align="center">AMSC N/A</p>	CHECKED BY Greg Cecil																			
	APPROVED BY Raymond Monnin																			
	DRAWING APPROVAL DATE 03-07-23																			
REVISION LEVEL <b>C</b>	SIZE A	CAGE CODE <b>67268</b>	<b>5962-03247</b>																	
	SHEET		1 OF 10																	

1. SCOPE

1.1 Scope. This drawing documents five product assurance classes as defined in paragraph 1.2.3 and MIL-PRF-38534. A choice of case outlines and lead finishes which are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of radiation hardness assurance levels are reflected in the PIN.

1.2 PIN. The PIN shall be as shown in the following example:

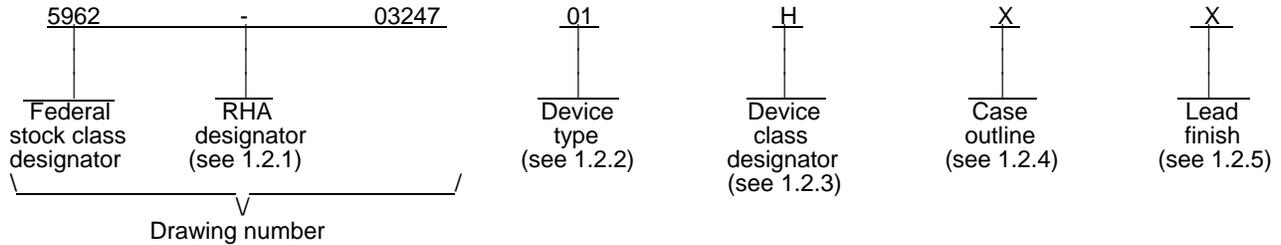

1.2.1 Radiation hardness assurance (RHA) designator. RHA marked devices shall meet the MIL-PRF-38534 specified RHA levels and shall be marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device type(s). The device type(s) identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	53252	Dual channel, power MOSFET, optocoupler, 90 V, 0.8 A

1.2.3 Device class designator. This device class designator shall be a single letter identifying the product assurance level. All levels are defined by the requirements of MIL-PRF-38534 and require QML Certification as well as qualification (Class H, K, and E) or QML Listing (Class G and D). The product assurance levels are as follows:

<u>Device class</u>	<u>Device performance documentation</u>
K	Highest reliability class available. This level is intended for use in space applications.
H	Standard military quality class level. This level is intended for use in applications where non-space high reliability devices are required.
G	Reduced testing version of the standard military quality class. This level uses the Class H screening and In-Process Inspections with a possible limited temperature range, manufacturer specified incoming flow, and the manufacturer guarantees (but may not test) periodic and conformance inspections (Group A, B, C, and D).
E	Designates devices which are based upon one of the other classes (K, H, or G) with exception(s) taken to the requirements of that class. These exception(s) must be specified in the device acquisition document; therefore the acquisition document should be reviewed to ensure that the exception(s) taken will not adversely affect system performance.
D	Manufacturer specified quality class. Quality level is defined by the manufacturers internal, QML certified flow. This product may have a limited temperature range.

1.2.4 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
X	See figure 1	8	Dual-in-line
Y	See figure 1	8	Dual-in-line
Z	See figure 1	8	Dual-in-line

1.2.5 Lead finish. The lead finish shall be as specified in MIL-PRF-38534.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-03247</b>
		REVISION LEVEL <b>C</b>	SHEET <b>2</b>

1.3 Absolute maximum ratings. <sup>1/</sup>

Average input current (I <sub>F</sub> ).....	20 mA
Peak repetitive input current (I <sub>FPK</sub> ).....	40 mA <sup>2/</sup>
Peak surge input current (I <sub>FPK</sub> surge).....	100 mA <sup>3/</sup>
Continuous output current per relay (I <sub>O</sub> ).....	0.8 A <sup>4/</sup>
Single shot output current per relay (I <sub>OPK</sub> surge, pulse width <10 ms).....	3.0 A
Output voltage (V <sub>O</sub> ).....	90 V dc
Output power dissipation (P <sub>O</sub> ).....	1.54 W <sup>5/</sup>
Junction temperature (T <sub>J</sub> ).....	+150°C
Thermal resistance junction-to-case (θ <sub>JC</sub> ).....	15°C/W
Lead temperature (soldering, 10 seconds).....	+260°C <sup>6/</sup>
Storage temperature range.....	-65°C to +150°C

1.4 Recommended operating conditions.

Input current ON (I <sub>FON</sub> ).....	10 mA minimum to 20 mA maximum
Input voltage OFF (V <sub>FOFF</sub> ).....	0 to 0.6 V dc maximum
Ambient operating temperature range (T <sub>A</sub> ).....	-55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-38534 - Hybrid Microcircuits, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.  
 MIL-STD-1835 - Interface Standard for Electronic Component Case Outlines.

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.  
 MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at <https://assist.daps.dla.mil/quicksearch/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

- <sup>1/</sup> Stresses above the absolute maximum ratings may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.
- <sup>2/</sup> Pulse width < 100 ms, duty cycle < 50 %.
- <sup>3/</sup> Pulse width < 0.2 ms, duty cycle < 0.1 %.
- <sup>4/</sup> Maximum average current rating where the case temperature (T<sub>C</sub>) is maintained below 120°C.
- <sup>5/</sup> Output power dissipation (P<sub>O</sub>) is obtained when the part is handling the maximum output current (I<sub>O</sub>). Care should be taken not to exceed the maximum output dissipation, maximum case temperature, and maximum junction temperature when repetitively switching loads.
- <sup>6/</sup> Lead temperature soldering occurs 1.6 mm below the seating plane.

<b>STANDARD                  MICROCIRCUIT DRAWING                  DLA LAND AND MARITIME                  COLUMBUS, OHIO 43218-3990</b>	SIZE <b>A</b>		<b>5962-03247</b>
		REVISION LEVEL <b>C</b>	SHEET <b>3</b>

3. REQUIREMENTS

3.1 Item requirements. The individual item performance requirements for device classes D, E, G, H, and K shall be in accordance with MIL-PRF-38534. Compliance with MIL-PRF-38534 shall include the performance of all tests herein or as designated in the device manufacturer's Quality Management (QM) plan or as designated for the applicable device class. The manufacturer may eliminate, modify or optimize the tests and inspections herein, however the performance requirements as defined in MIL-PRF-38534 shall be met for the applicable device class. In addition, the modification in the QM plan shall not affect the form, fit, or function of the device for the applicable device class.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38534 and herein.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.4 herein and figure 1.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 2.

3.2.3 Truth table(s). The truth table(s) shall be as specified on figure 3.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full specified operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.

3.5 Marking of device(s). Marking of device(s) shall be in accordance with MIL-PRF-38534. The device shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's vendor similar PIN may also be marked.

3.6 Data. In addition to the general performance requirements of MIL-PRF-38534, the manufacturer of the device described herein shall maintain the electrical test data (variables format) from the initial quality conformance inspection group A lot sample, for each device type listed herein. Also, the data should include a summary of all parameters manually tested, and for those which, if any, are guaranteed. This data shall be maintained under document revision level control by the manufacturer and be made available to the preparing activity (DLA Land and Maritime -VA) upon request.

3.7 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to supply to this drawing. The certificate of compliance (original copy) submitted to DLA Land and Maritime -VA shall affirm that the manufacturer's product meets the performance requirements of MIL-PRF-38534 and herein.

3.8 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38534 shall be provided with each lot of microcircuits delivered to this drawing.

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38534 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38534. The following additional criteria shall apply:

- a. Burn-in test, method 1015 of MIL-STD-883.
  - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DLA Land and Maritime -VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.
  - (2) T<sub>A</sub> as specified in accordance with table I of method 1015 of MIL-STD-883.
- b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

<b>STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990</b>	SIZE <b>A</b>		<b>5962-03247</b>
		REVISION LEVEL <b>C</b>	SHEET <b>4</b>


TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Output withstand voltage	V <sub>O(OFF)</sub>	V <sub>FOFF</sub> = 0.6 V, I <sub>O</sub> = 10 μA	1,2,3	01	90		V
Output on resistance <u>1/</u>	R <sub>(ON)</sub>	I <sub>FON</sub> = 10 mA, I <sub>O</sub> = 800 mA, pulse duration ≤ 30 ms, duty cycle < 10%	1,2,3	01		1.2	Ω
Output leakage current	I <sub>O(OFF)</sub>	V <sub>FOFF</sub> = 0.6 V, V <sub>O</sub> = 90 V	1,2,3	01		10	μA
Input forward voltage	V <sub>FOFF</sub>	I <sub>FON</sub> = 10 mA	1,2,3	01	1.0	1.7	V
Input reverse breakdown voltage	V <sub>r</sub>	I <sub>r</sub> = 10 μA	1,2,3	01	5.0		V
Input-output isolation current <u>2/</u>	I <sub>I-O</sub>	V <sub>I-O</sub> = 1000 V dc, t = 5 s, RH ≤ 65 %, T <sub>A</sub> = +25°C	1	01		1.0	μA
Channel-channel isolation current <u>2/</u>	I <sub>ISO</sub>	V <sub>I-O</sub> = 1000 V dc, t = 5 s, RH ≤ 65 %, T <sub>A</sub> = +25°C	1	01		1.0	μA
Turn-on time <u>1/</u>	t <sub>ON</sub>	I <sub>FON</sub> = 10 mA, I <sub>O</sub> = 0.8 A, pulse duration ≤ 30 ms, duty cycle < 10%	9,10,11	01		6.0	ms
Turn-off time <u>1/</u>	t <sub>OFF</sub>	I <sub>FON</sub> = 10 mA, I <sub>O</sub> = 0.8 A, pulse duration ≤ 30 ms, duty cycle < 10%	9,10,11	01		2.0	ms

1/ During the pulse R<sub>ON</sub> measurement (I<sub>O</sub> duration < 30 ms), T<sub>A</sub> and T<sub>C</sub> are equal.  
2/ This is a momentary withstand test, not a continuous operating condition.


<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-03247</b>
		REVISION LEVEL <b>C</b>	SHEET <b>5</b>

Case outline X.

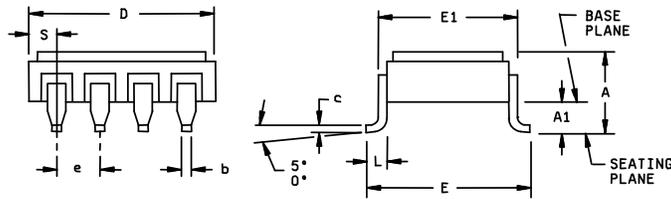

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A		6.99		.275
A1	1.40	1.65	.055	.065
b	0.41	0.53	.016	.021
c	0.18	0.33	.007	.013
D	9.40	9.91	.370	.390
e	2.29	2.79	.090	.110
E	9.65	9.91	.380	.390
E1		8.13		.320
L	1.07	1.32	.042	.052
S	0.89	1.27	.035	.050

Case outline Y.

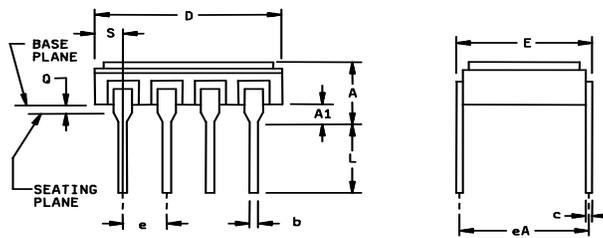

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A		6.60		.260
A1	0.76	1.27	.030	.050
b	0.41	0.53	.016	.021
c	0.18	0.33	.007	.013
D	9.40	9.91	.370	.390
e	2.29	2.79	.090	.110
E		8.13		.320
eA	7.37	7.87	.290	.310
L		12.70		.500
Q	0.51		.020	
S	0.89	1.27	.035	.050


NOTES:

1. The U.S. government preferred system of measurement is the metric SI. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.
2. Pin 1 is indicated by the ESD triangle(s) marked on top of the package.

FIGURE 1. Case outline(s).

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-03247</b>
		REVISION LEVEL <b>C</b>	SHEET <b>6</b>

Case outline Z.

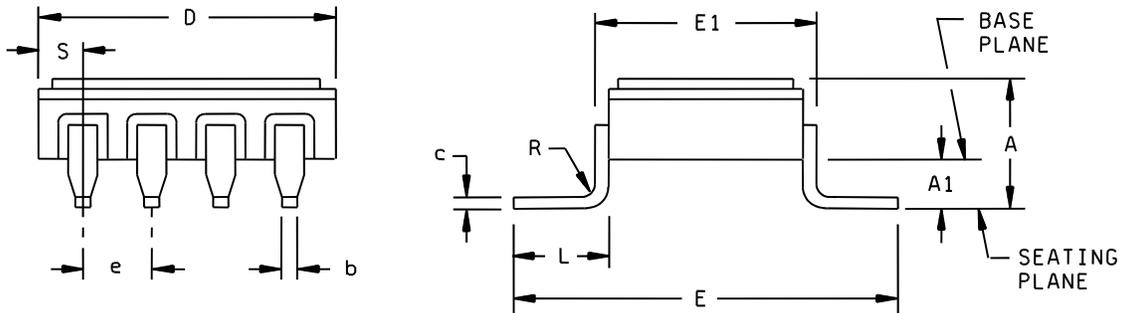

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A		4.57		.180
A1	1.40	1.65	.055	.065
b	0.41	0.53	.016	.021
c	0.18	0.33	.007	.013
D	9.40	9.91	.370	.390
e	2.29	2.79	.090	.110
E	12.45	12.70	.490	.500
E1		7.87		.310
L	2.34		.092	
R	.51 TYP		.020 TYP	
S	0.89	1.27	.035	.050

NOTES:

1. The U.S. government preferred system of measurement is the metric SI. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.
2. Pin 1 is indicated by the ESD triangle(s) marked on top of the package.

FIGURE 1. Case outline(s) - Continued.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-03247</b>
		REVISION LEVEL <b>C</b>	SHEET <b>7</b>

Device type	01
Case outlines	X, Y, and Z
Terminal number	Terminal symbol
1	+ IN 1
2	- IN 1
3	- OUT 2
4	+ OUT 2
5	+ IN 2
6	- IN 2
7	- OUT 1
8	+ OUT 1

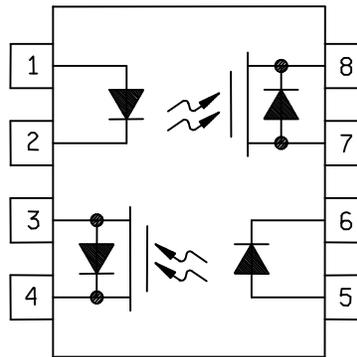


FIGURE 2. Terminal connections.

Input	Output
OFF	OFF
ON	ON

FIGURE 3. Truth table(s).

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-03247</b>
		REVISION LEVEL <b>C</b>	SHEET <b>8</b>

TABLE II. Electrical test requirements.

MIL-PRF-38534 test requirements	Subgroups (in accordance with MIL-PRF-38534, group A test table)
Interim electrical parameters	1
Final electrical parameters	1*,2,3,9
Group A test requirements	1,2,3,9,10,11
Group C end-point electrical parameters	1,2,3
End-point electrical parameters for radiation hardness assurance (RHA) devices	Not applicable

\* PDA applies to subgroup 1.

4.3 Conformance and periodic inspections. Conformance inspection (CI) and periodic inspection (PI) shall be in accordance with MIL-PRF-38534 and as specified herein.

4.3.1 Group A inspection (CI). Group A inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. Tests shall be as specified in table II herein.
- b. Subgroups 4, 5, 6, 7, and 8 shall be omitted.

4.3.2 Group B inspection (PI). Group B inspection shall be in accordance with MIL-PRF-38534.

4.3.3 Group C inspection (PI). Group C inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test, method 1005 of MIL-STD-883.
  - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DLA Land and Maritime -VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.
  - (2)  $T_A$  as specified in accordance with table I of method 1005 of MIL-STD-883.
  - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.3.4 Group D inspection (PI). Group D inspection shall be in accordance with MIL-PRF-38534.

4.3.5 Radiation Hardness Assurance (RHA) inspection. RHA inspection is not currently applicable to this drawing.

<b>STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990</b>	<b>SIZE A</b>		<b>5962-03247</b>
		<b>REVISION LEVEL C</b>	<b>SHEET 9</b>

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38534.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated as specified in MIL-PRF-38534.

6.4 Record of users. Military and industrial users shall inform DLA Land and Maritime when a system application requires configuration control and the applicable SMD to that system. DLA Land and Maritime will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DLA Land and Maritime-VA, telephone (614) 692-0547.

6.5 Comments. Comments on this drawing should be directed to DLA Land and Maritime-VA, Columbus, Ohio 43218-3990, or telephone (614) 692-1081.

6.6 Sources of supply. Sources of supply are listed in MIL-HDBK-103 and QML-38534. The vendors listed in MIL-HDBK-103 and QML-38534 have submitted a certificate of compliance (see 3.7 herein) to DLA Land and Maritime-VA and have agreed to this drawing.

<b>STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990</b>	<b>SIZE A</b>		<b>5962-03247</b>
		<b>REVISION LEVEL C</b>	<b>SHEET 10</b>

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 12-01-17

Approved sources of supply for SMD 5962-03247 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38534 during the next revisions. MIL-HDBK-103 and QML-38534 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DLA Land and Maritime -VA. This information bulletin is superseded by the next dated revisions of MIL-HDBK-103 and QML-38534. DLA Land and Maritime maintains an online database of all current sources of supply at <http://www.landandmaritime.dla.mil/Programs/Smcr/>.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
5962-0324701HXA	31757	53252-117
5962-0324701HXC	31757	53252-118
5962-0324701HYA	31757	53252-107
5962-0324701HYC	31757	53252-108
5962-0324701HZA	31757	53252-127
5962-0324701HZC	31757	53252-128

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the Vendor to determine its availability.
- 2/ **Caution.** Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE  
number

Vendor name  
and address

31757

Micropac Industries, Incorporated  
905 E. Walnut Street  
Garland, TX 75040

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.