

**REVISIONS**

LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
B	Delete normalized fanout. Change $t_{p(IN)}$ : Inputs A and B. Change the following: $f_{clock}$ : Input B, $I_{IH2}$ , $I_{IH3}$ , $I_{IL1}$ , $I_{IL2}$ , $f_{MAX1}$ , $f_{MAX2}$ . Delete minimum limits from all prop. delay times. Change prop. delay time N to $B_D$ to B to $Q_D$ . Change prop. delay time CLR to $Q_1$ . Change prop. delay time $t_{PLH6}$ and $t_{PHL6}$ to $t_{PHL6}$ only. Revise to new military format. Case E inactive for new design. Renumbered high level input current.	87-10-26	M. A. Frye
C	Changes in accordance with NOR 5962-R175-92. -tvn	92-04-27	Monica L. Poelking
D	Update to reflect latest changes in format and requirements. Editorial changes throughout. --les	04-07-27	Raymond Monnin

**CURRENT CAGE CODE 67268**


THE ORIGINAL FIRST PAGE OF THIS DRAWING HAS BEEN REPLACED.

REV																							
SHEET																							
REV																							
SHEET																							
REV STATUS OF SHEETS	REV	D	D	D	D	D	D	D	D	D	D	D	D										
	SHEET	1	2	3	4	5	6	7	8	9	10												
PMIC N/A	PREPARED BY	Monica L. Grosel										<p align="center"><b>DEFENSE SUPPLY CENTER COLUMBUS</b>  <b>COLUMBUS, OHIO 43218-3990</b>  <a href="http://www.dsc.dla.mil">http://www.dsc.dla.mil</a></p> <p align="center">MICROCIRCUIT, DIGITAL, BIPOLAR, LOW POWER SCHOTTKY TTL, DECADE COUNTER, MONOLITHIC SILICON</p>											
<p align="center"><b>STANDARD MICROCIRCUIT DRAWING</b></p> <p>THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE</p> <p align="center">AMSC N/A</p>	CHECKED BY	D. A. DiCenzo																					
	APPROVED BY	Michael A. Frye																					
	DRAWING APPROVAL DATE	79-01-23																					
	REVISION LEVEL	<b>D</b>										SIZE	CAGE CODE	<b>78026</b>									
												A	<b>14933</b>										
												SHEET											
												1 OF 10											

1. SCOPE

1.1 Scope. This drawing describes device requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A.

1.2 Part or Identifying Number (PIN). The complete PIN is as shown in the following example:

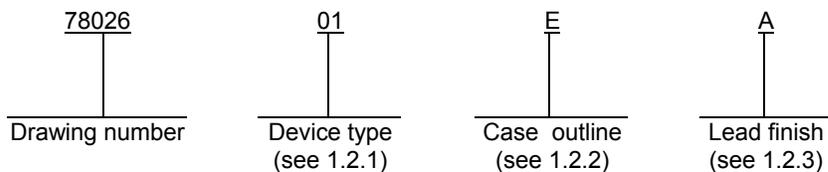

1.2.1 Device types. The device types identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	54LS390	Dual decade counter with A and B inputs

1.2.2 Case outlines. The case outlines are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
E	GDIP1-T16 or CDIP2-T16	16	dual-in-line
F	GDIP2-F16 or CDFP3-F16	16	flat

1.2.3 Lead finish. The lead finish is as specified in MIL-PRF-38535, appendix A.

1.3 Absolute maximum ratings.

Supply voltage range .....	-0.5 V dc to +7.0 V dc
Input voltage range .....	-1.5 V dc at -18 mA to +5.5 V dc
Storage temperature .....	-65°C to +150°C
Maximum power dissipation (P <sub>D</sub> ) .....	143 mW <sup>1/</sup>
Lead temperature (soldering, 10 seconds) .....	+300°C
Junction temperature (T <sub>J</sub> ) .....	+175°C
Thermal resistance, junction-to-case (θ <sub>JC</sub> ):	
Cases E and F .....	See MIL-STD-1835

1.4 Recommended operating conditions.

Supply voltage range (V <sub>CC</sub> ) .....	4.5 V dc minimum to 5.5 V dc maximum
Minimum high level input voltage (V <sub>IH</sub> ): .....	2.0 V dc
Maximum low level input voltage (V <sub>IL</sub> ): .....	0.7 V dc
Case operating temperature range (T <sub>C</sub> ) .....	-55°C to +125°C
Width of input count pulse, t <sub>p(IN)</sub> :	
Input A .....	20 ns minimum
Input B .....	40 ns minimum
Width of CLEAR pulse .....	20 ns minimum
Input clock frequency, f <sub>clock</sub> :	
Input A .....	0 to 25 MHz
Input B .....	0 to 12.5 MHz

<sup>1/</sup> Maximum power dissipation is defined as V<sub>CC</sub> X I<sub>CC</sub>, and must withstand the added P<sub>D</sub> due to short circuit test e.g., I<sub>OS</sub>.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>	<b>78026</b>
	REVISION LEVEL <b>D</b>	SHEET <b>2</b>

## 2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

### DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

### DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.  
MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

### DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.  
MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at <http://assist.daps.dla.mil/quicksearch/> or [www.dodssp.daps.mil](http://www.dodssp.daps.mil) or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein. Product built to this drawing that is produced by a Qualified Manufacturer Listing (QML) certified and qualified manufacturer or a manufacturer who has been granted transitional certification to MIL-PRF-38535 may be processed as QML product in accordance with the manufacturers approved program plan and qualifying activity approval in accordance with MIL-PRF-38535. This QML flow as documented in the Quality Management (QM) plan may make modifications to the requirements herein. These modifications shall not affect form, fit, or function of the device. These modifications shall not affect the PIN as described herein. A "Q" or "QML" certification mark in accordance with MIL-PRF-38535 is required to identify when the QML flow option is used.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535, appendix A and herein.

3.2.1 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.3 Truth tables. The truth tables shall be as specified on figure 2.

3.2.4 Logic diagram. The logic diagram shall be as specified on figure 3

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full case operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-PRF-38535, appendix A. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>78026</b>
		REVISION LEVEL <b>D</b>	SHEET <b>3</b>

3.5.1 Certification/compliance mark. A compliance indicator "C" shall be marked on all non-JAN devices built in compliance to MIL-PRF-38535, appendix A. The compliance indicator "C" shall be replaced with a "Q" or "QML" certification mark in accordance with MIL-PRF-38535 to identify when the QML flow option is used.

3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6 herein). The certificate of compliance submitted to DSCC-VA prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-PRF-38535, appendix A and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change. Notification of change to DSCC-VA shall be required for any change that affects this drawing.

3.9 Verification and review. DSCC, DSCC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>78026</b>
		REVISION LEVEL <b>D</b>	SHEET <b>4</b>

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C ≤ T <sub>C</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
High level output voltage,	V <sub>OH</sub>	V <sub>CC</sub> = 4.5 V, V <sub>IL</sub> = 0.7 V, I <sub>OH</sub> = -0.4 mA, V <sub>IH</sub> = 2.0 V	1, 2, 3	All	2.5		V
Low level output voltage	V <sub>OL</sub>	V <sub>CC</sub> = 4.5 V, V <sub>IL</sub> = 0.7 V, I <sub>OL</sub> = 4.0 mA, V <sub>IH</sub> = 2.0 V	1, 2, 3	All		0.4	V
Input clamp voltage	V <sub>IC</sub>	V <sub>CC</sub> = 4.5 V, I <sub>IN</sub> = -18 mA, T <sub>C</sub> = +25°C	1	All		-1.5	V
High level input current at Clear or Set to 9 inputs	I <sub>IH1</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IH</sub> = 2.7 V	1, 2, 3	All		20	μA
	I <sub>IH2</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IH</sub> = 5.5 V	1, 2, 3	All		100	μA
High level input current at Input A or clock	I <sub>IH3</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IH</sub> = 2.7 V	1, 2, 3	All		100	μA
	I <sub>IH4</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IH</sub> = 5.5 V	1, 2, 3	All		400	μA
High level input current at Input B	I <sub>IH5</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IH</sub> = 2.7 V	1, 2, 3	All		200	μA
	I <sub>IH6</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IH</sub> = 5.5 V	1, 2, 3	All		400	μA
Low level input current at Clear or Set to 9 inputs	I <sub>IL1</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IL</sub> = 0.4 V	1, 2, 3	All		-400	μA
Low level input current at Input A	I <sub>IL2</sub>		1, 2, 3	All		-1.6	mA
Low level input current at Input B	I <sub>IL3</sub>		1, 2, 3	All		-2.4	mA
Short circuit output current	I <sub>OS</sub>	V <sub>CC</sub> = 5.5 V, V <sub>OUT</sub> = 0.0 V <u>1/</u>	1, 2, 3	All	-15	-130	mA
Supply current	I <sub>CC</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IN</sub> = 0.0 V	1, 2, 3	All		26	mA
Maximum input count Frequency, A or CLK	f <sub>MAX1</sub>	V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 15 pF ±10% <u>2/</u> R <sub>L</sub> = 2 kΩ ±5%, C <sub>L</sub> = 50 pF ±10%	9	All	25		MHz
			10, 11		15		
Maximum input count Frequency, B	f <sub>MAX2</sub>	V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 15 pF ±10% <u>2/</u> R <sub>L</sub> = 2 kΩ ±5%, C <sub>L</sub> = 50 pF ±10%	9	All	12.5		MHz
			10, 11		7.5		
Propagation delay time, A to Q <sub>A</sub>	t <sub>PLH1</sub>	V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 15 pF ±10% R <sub>L</sub> = 2 kΩ ±5% <u>2/</u>	9	All		20	ns
			10, 11			28	
	t <sub>PHL1</sub>	V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 50 pF ±10% R <sub>L</sub> = 2 kΩ ±5% <u>2/</u>	9	All		25	ns
			10, 11			35	
Propagation delay time, B to Q <sub>B</sub>	t <sub>PLH2</sub>	V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 15 pF ±10% R <sub>L</sub> = 2 kΩ ±5% <u>2/</u>	9	All		21	ns
			10, 11			29	
	t <sub>PHL2</sub>	V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 50 pF ±10% R <sub>L</sub> = 2 kΩ ±5% <u>2/</u>	9	All		26	ns
			10, 11			36	

See footnotes at end of table.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>78026</b>
		REVISION LEVEL <b>D</b>	SHEET <b>5</b>

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions -55°C ≤ T <sub>C</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Propagation delay time, B to Q <sub>C</sub>	t <sub>PLH3</sub> t <sub>PHL3</sub>	V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 15 pF ±10% R <sub>L</sub> = 2 kΩ ±5% <u>2/</u>	9	All		39	ns
			10, 11			55	
		V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 50 pF ±10% R <sub>L</sub> = 2 kΩ ±5% <u>2/</u>	9	All		44	ns
			10, 11			62	
Propagation delay time, B to Q <sub>D</sub>	t <sub>PLH4</sub> t <sub>PHL4</sub>	V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 15 pF ±10% R <sub>L</sub> = 2 kΩ ±5% <u>2/</u>	9	All		21	ns
			10, 11			29	
		V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 50 pF ±10% R <sub>L</sub> = 2 kΩ ±5% <u>2/</u>	9	All		26	ns
			10, 11			36	
Propagation delay time, CLR to Q	t <sub>PHL5</sub>	V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 15 pF ±10% R <sub>L</sub> = 2 kΩ ±5% <u>2/</u>	9	All		39	ns
			10, 11			55	
		V <sub>CC</sub> = 5.0 V, C <sub>L</sub> = 50 pF ±10% R <sub>L</sub> = 2 kΩ ±5% <u>2/</u>	9	All		44	ns
			10, 11			62	

1/ Not more than one output should be shorted at a time and the duration of the short circuit condition should not exceed 1 second.

2/ Propagation delay time testing and maximum clock frequency testing may be performed using either C<sub>L</sub> = 15 pF or C<sub>L</sub> = 50 pF. However, the manufacturer must certify and guarantee that the microcircuits meet the switching test limits specified for a 50 pF load.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>78026</b>
		REVISION LEVEL <b>D</b>	SHEET <b>6</b>

Device type	01
Case outlines	E, F
Terminal number	Terminal symbol
1	1A
2	1
3	1Q <sub>A</sub>
4	1B
5	1Q <sub>B</sub>
6	1Q <sub>C</sub>
7	1Q <sub>D</sub>
8	GND
9	2Q <sub>D</sub>
10	2Q <sub>C</sub>
11	2Q <sub>B</sub>
12	2B
13	2Q <sub>A</sub>
14	2 (CLR)
15	2A
16	V <sub>CC</sub>

FIGURE 1. Terminal connections.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>78026</b>
		REVISION LEVEL <b>D</b>	SHEET <b>7</b>

Each counter

BCD count sequence (See note A)					Bi-quinary (5-2) (See note B)				
Count	Output				Count	Output			
	Q <sub>D</sub>	Q <sub>C</sub>	Q <sub>B</sub>	Q <sub>A</sub>		Q <sub>A</sub>	Q <sub>D</sub>	Q <sub>C</sub>	Q <sub>B</sub>
0	L	L	L	L	0	L	L	L	L
1	L	L	L	H	1	L	L	L	H
2	L	L	H	L	2	L	L	H	L
3	L	L	H	H	3	L	L	H	H
4	L	H	L	L	4	L	H	L	L
5	L	H	L	H	5	H	L	L	L
6	L	H	H	L	6	H	L	L	H
7	L	H	H	H	7	H	L	H	L
8	H	L	L	L	8	H	L	H	H
9	H	L	L	H	9	H	H	L	L

NOTES:

- A. Output Q<sub>A</sub> is connected to input B for BCD count.
- B. Output Q<sub>D</sub> is connected to input A for bi-quinary count.

FIGURE 2. Truth table.

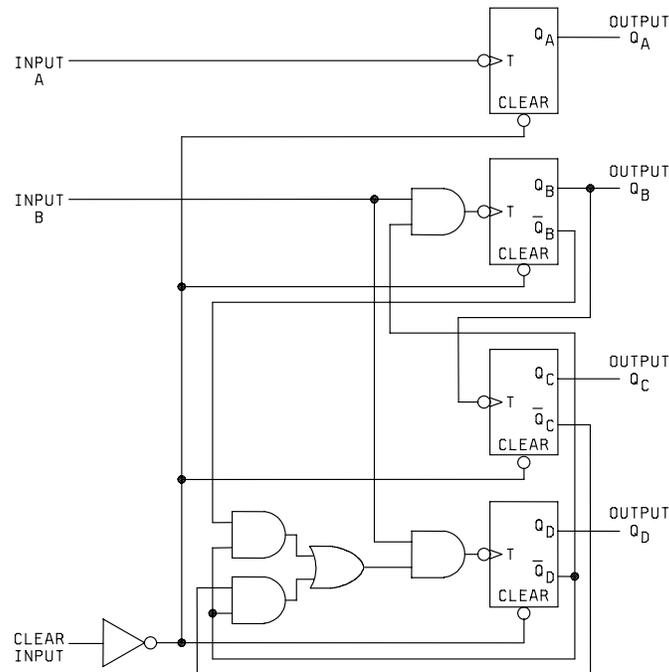


FIGURE 3. Logic diagram.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>78026</b>
		REVISION LEVEL <b>D</b>	SHEET <b>8</b>

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.

(2)  $T_A = +125^{\circ}\text{C}$ , minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)
Interim electrical parameters (method 5004)	---
Final electrical test parameters (method 5004)	1*, 2, 3, 9
Group A test requirements (method 5005)	1, 2, 3, 7, 9, 10**, 11**
Groups C and D end-point electrical parameters (method 5005)	1, 2, 3

\* PDA applies to subgroup 1.

\*\* Subgroups 10 and 11, if not tested, shall be guaranteed to the specified limits in table I.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, 6, and 8 in table I, method 5005 of MIL-STD-883 shall be omitted.

c. Subgroup 7 shall include verification of the truth table.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>78026</b>
		REVISION LEVEL <b>D</b>	SHEET <b>9</b>

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
  - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.
  - (2)  $T_A = +125^{\circ}\text{C}$ , minimum.
  - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535, appendix A.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished using DD Form 1692, Engineering Change Proposal.

6.4 Record of users. Military and industrial users shall inform Defense Supply Center Columbus (DSCC) when a system application requires configuration control and the applicable SMD. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-0544.

6.5 Comments. Comments on this drawing should be directed to DSCC-VA, Columbus, Ohio 43218-3990, or telephone (614) 692-0547.

6.6 Approved sources of supply. Approved sources of supply are listed in MIL-HDBK-103. The vendors listed in MIL-HDBK-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DSCC-VA.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>78026</b>
		REVISION LEVEL <b>D</b>	SHEET <b>10</b>

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 04-07-27

Approved sources of supply for SMD 78026 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This information bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>	Reference military specification PIN
7802601EA	01295 <u>3/</u>	SNJ54LS390J 54LS390/BEAJC	M38510/32701BEA
7802601FA	01295 <u>3/</u>	SNJ54LS390W 54LS390/BFAJC	M38510/32701BFA

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.
- 2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.
- 3/ Not available from an approved source of supply.

Vendor CAGE  
number

01295

Vendor name  
and address

Texas Instruments, Inc.  
Semiconductor Group  
8505 Forest Ln.  
PO Box 660199  
Dallas, Tx 75243

POC U.S. Highway 75 South  
P.O. Box 84, M/S 853  
Sherman, TX 75090-9493

<p>The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.</p>
---