

REVISIONS			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Make change to input offset voltage test and supply current test as specified under table I. Make change to table IIC. In accordance with N.O.R. 5962-R348-92.	92-11-25	M. A. FRYE
B	Delete outline letter G and case outline A-1. Make change to input bias current test as specified under table I. In accordance with N.O.R. 5962-R264-94.	94-08-18	M. A. FRYE
C	Add device types 04, 05, 06, 07, 08, and 09. Make changes to 1.3, table I, figure 1, and table II. Redrawn.	96-10-08	R. MONNIN
D	Drawing updated to reflect current requirements. - ro	03-01-16	R. MONNIN
E	Update drawing as part of 5 year review. - jt	11-10-03	C. SAFFLE


THE ORIGINAL FIRST SHEET OF THIS DRAWING HAS BEEN REPLACED.

REV																				
SHEET																				
REV	E	E	E	E	E															
SHEET	15	16	17	18	19															
REV STATUS OF SHEETS	REV			E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	
	SHEET			1	2	3	4	5	6	7	8	9	10	11	12	13	14			
PMIC N/A	PREPARED BY RICK C. OFFICER				<p align="center">DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 http://www.landandmaritime.dla.mil</p> <p>MICROCIRCUIT, LINEAR, HIGH SPEED, LOW POWER, PRECISION, OPERATIONAL AMPLIFIER, MONOLITHIC SILICON</p>															
<p align="center">STANDARD MICROCIRCUIT DRAWING</p> <p>THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE</p>	CHECKED BY CHARLES E. BESORE																			
	APPROVED BY MICHAEL A. FRYE																			
	DRAWING APPROVAL DATE 90-10-10																			
AMSC N/A	REVISION LEVEL E				SIZE A	CAGE CODE 67268	5962-90881													
					SHEET		1 OF 19													

1. SCOPE

1.1 Scope. This drawing documents two product assurance class levels consisting of high reliability (device classes Q and M) and space application (device class V). A choice of case outlines and lead finishes are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of Radiation Hardness Assurance (RHA) levels is reflected in the PIN.

1.2 PIN. The PIN is as shown in the following example:

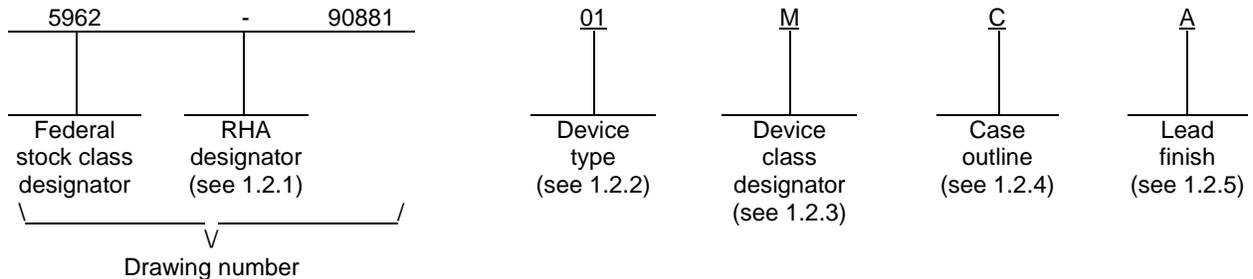

1.2.1 RHA designator. Device classes Q and V RHA marked devices meet the MIL-PRF-38535 specified RHA levels and are marked with the appropriate RHA designator. Device class M RHA marked devices meet the MIL-PRF-38535, appendix A specified RHA levels and are marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device types. The device types identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	TLE2021M	High speed low power precision single operational amplifier
02	TLE2022M	High speed low power precision dual operational amplifier
03	TLE2024M	High speed low power precision quad operational amplifier
04	TLE2021AM	High speed low power precision single operational amplifier
05	TLE2022AM	High speed low power precision dual operational amplifier
06	TLE2024AM	High speed low power precision quad operational amplifier
07	TLE2021BM	High speed low power precision single operational amplifier
08	TLE2022BM	High speed low power precision dual operational amplifier
09	TLE2024BM	High speed low power precision quad operational amplifier

1.2.3 Device class designator. The device class designator is a single letter identifying the product assurance level as follows:

<u>Device class</u>	<u>Device requirements documentation</u>
M	Vendor self-certification to the requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A
Q or V	Certification and qualification to MIL-PRF-38535

1.2.4 Case outlines. The case outlines are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
C	GDIP1-T14 or CDIP2-T14	14	Dual-in-line
G	MACY1-X8	8	Can
P	GDIP1-T8 or CDIP2-T8	8	Dual-in-line
2	CQCC1-N20	20	Square leadless chip carrier

1.2.5 Lead finish. The lead finish is as specified in MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 2

1.3 Absolute maximum ratings. 1/ 2/

Supply voltage (+V _{CC})	+20 V dc
Supply voltage (-V _{CC})	-20 V dc
Differential input voltage	±0.6 V dc 3/
Input voltage range (V _I) (any input)	±V _{CC}
Input current (I _I) (each input)	±1 mA
Output current (I _O):	
Device types 01, 04, 07	±20 mA
Device types 02, 05, 08	±30 mA
Device types 03, 06, 09	±40 mA
Total current into +V _{CC} terminal:	
Device types 01, 04, 07	20 mA
Device types 02, 03, 05, 06, 08, 09	80 mA
Total current into -V _{CC} terminal:	
Device types 01, 04, 07	20 mA
Device types 02, 03, 05, 06, 08, 09	80 mA
Duration of short circuit current at (or below) +25°C	Unlimited 4/
Storage temperature range	-65°C to +150°C
Terminal temperature for 60 seconds:	
Case 2	+260°C
Lead temperature, soldering 6 mm (1/16 inch) from case for 60 seconds:	
Cases C, G, and P	+300°C
Junction temperature (T _J)	+150°C
Power dissipation (P _D)	
Cases 2 and C	1375 mW 5/
Case G	650 mW 5/
Case P	1050 mW 5/
Thermal resistance, junction-to-case (θ _{JC})	See MIL-STD-1835

1.4 Recommended operating conditions.

Supply voltage (V _{CC})	±2 V dc minimum, ±20 V dc maximum
Common-mode input voltage (V _{IC}) (+V _{CC} = 5 V)	-0 V dc minimum, 3.2 V dc maximum
Common-mode input voltage (V _{IC}) (+V _{CC} = ±15 V)	-15 V dc minimum, 13.2 V dc maximum
Ambient operating free-air temperature (T _A)	-55°C to +125°C
Source resistance from ground to input terminals (R _S)	50 Ω

- 1/ Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.
- 2/ All voltage values, except differential voltages, are with respect to the midpoint between +V_{CC} and -V_{CC}.
- 3/ Differential voltages are at the noninverting input with respect to the inverting input. Excessive current will flow if a differential input voltage in excess of approximately ±600 mV is applied between the inputs unless some limiting resistance is used.
- 4/ The output may be shorted to either supply. Temperature and supply voltage must be limited to ensure that the maximum dissipation rating is not exceeded.
- 5/ Above +25°C derate at a factor of 11.0 mW/°C for cases C and 2, 5.2 mW/°C for case G, and 8.4 mW/°C for case P.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 3

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.
MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.
MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at <https://assist.daps.dla.mil/quicksearch/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements for device classes Q and V shall be in accordance with MIL-PRF-38535 as specified herein, or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. The individual item requirements for device class M shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein for device classes Q and V or MIL-PRF-38535, appendix A and herein for device class M.

3.2.1 Case outlines. The case outlines shall be in accordance with 1.2.4 herein.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.3 Test circuits. The test circuits shall be as specified on figure 2.

3.3 Electrical performance characteristics and postirradiation parameter limits. Unless otherwise specified herein, the electrical performance characteristics and postirradiation parameter limits are as specified in table I and shall apply over the full ambient operating temperature range.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 4

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Input offset voltage	V _{IO}	V _{CC} = ±2.5 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1	01		600	μV
			2,3			1100	
		V _{CC} = ±15 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1			500	
			2,3			1000	
		V _{CC} = ±2.5 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1	02		600	
			2,3			800	
		V _{CC} = ±15 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1			500	
			2,3			700	
		V _{CC} = ±2.5 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1	03		1100	
			2,3			1300	
		V _{CC} = ±15 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1			1000	
			2,3			1200	
		V _{CC} = ±2.5 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1	04		300	
			2,3			600	
		V _{CC} = ±15 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1			200	
			2,3			500	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 5

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Input offset voltage	V _{IO}	V _{CC} = ±2.5 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1	05		400	μV
			2,3			550	
		V _{CC} = ±15 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1			300	
			2,3			450	
		V _{CC} = ±2.5 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1	06		850	
			2,3			1050	
		V _{CC} = ±15 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1			750	
			2,3			950	
		V _{CC} = ±2.5 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1	07		200	
			2,3			300	
		V _{CC} = ±15 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1			100	
			2,3			200	
		V _{CC} = ±2.5 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1	08		250	
			2,3			400	
		V _{CC} = ±15 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1			150	
			2,3			300	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 6

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Input offset voltage	V _{IO}	V _{CC} = ±2.5 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1	09		600	μV
			2,3			800	
		V _{CC} = ±15 V, V _{IC} = 0 V, V _O = 0 V, R _S = 50 Ω	1			500	
			2,3			700	
Input offset current	I _{IO}	V _{CC} = 5 V or ±15 V, V _{IC} = 0 V, R _S = 50 Ω	1	01,04, 07		3	nA
			2,3			5	
			1,2,3	02		5	
			1	03		6	
			2,3			10	
			1	05		4	
			2,3			5	
			1	06		5	
			2,3			9	
			1	08		3	
			2,3			5	
			1	09		4	
2,3		8					

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 7

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Input bias current	I _{IB}	V _{CC} = 5 V or ±15 V, V _{IC} = 0 V, R _S = 50 Ω	1,2,3	01		70	nA
			1,2,3	02		70	
			1	03		70	
			2,3			90	
			1,2,3	04		65	
			1	05		65	
			2,3			70	
			1	06		65	
			2,3			85	
			1,2,3	07		60	
			1	08		60	
			2,3			70	
			1	09		60	
			2,3			80	
Common mode input voltage range	V _{ICR}	V _{CC} = ±15 V, R _S = 50 Ω	1,2,3	All	-15 to 13.2		V
		V _{CC} = 5 V, R _S = 50 Ω			0 to 3.2		

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 8

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Maximum positive peak output voltage swing	+V _{OM}	V _{CC} = ±15 V, R _L = 10 kΩ	4	01,04, 07	14.0		V
			5,6		13.8		
			4	02,05, 08	14.0		
			5,6		13.9		
			4	03	13.8		
			5,6		13.7		
			4	06	13.9		
			5,6		13.7		
			4	09	14		
			5,6		13.8		
Maximum negative peak output voltage swing	-V _{OM}	V _{CC} = ±15 V, R _L = 10 kΩ	4	All	-13.7		V
			5,6		-13.6		
High level output voltage	V _{OH}	V _{CC} = 5 V, R _L = 10 kΩ	1	01,02, 04,05, 07,08	4.0		V
			2,3		3.8		
			1	03,06	3.9		
			2,3		3.7		
			1	09	4		
			2,3		3.8		

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 9

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Low level output voltage	V _{OL}	V _{CC} = 5 V, R _L = 10 kΩ	1	All		0.8	V
			2,3			0.95	
Large signal differential voltage amplification	A _{VD}	V _{CC} = 5 V, R _L = 10 kΩ, V _O = 1.4 V to 4 V	4	01,02, 04,07	0.3		V/μV
			5,6		0.1		
			4	03	0.2		
			5,6		0.1		
			4	05	0.4		
			5,6		0.1		
			4	06	0.3		
			5,6		0.1		
			4	08	0.5		
			5,6		0.1		
			4	09	0.4		
			5,6		0.1		
		V _{CC} = ±15 V, R _L = 10 kΩ, V _O = ±10 V	4	01,04, 07	1.0		
			5,6		0.5		
			4,5,6	02	0.8		
				03	0.4		
				05	1.0		

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 10

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Large signal differential voltage amplification	A _{VD}	V _{CC} = ±15 V, R _L = 10 kΩ, V _O = ±10 V	4,5,6	06	0.8		V/μV
				08	1.5		
				09	1.0		
Common mode rejection ratio	CMRR	V _{CC} = 5 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1	01,04, 07	85		dB
			2,3		80		
		V _{CC} = ±15 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1		100		
			2,3		96		
		V _{CC} = 5 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1	02	85		
			2,3		80		
		V _{CC} = ±15 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1		95		
			2,3		91		
		V _{CC} = 5 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1,2,3,	03	80		
			1		92		
		V _{CC} = ±15 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1		88		
			2,3				
		V _{CC} = 5 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1	05	87		
			2,3		82		
		V _{CC} = ±15 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1		97		
2,3	93						

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 11

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit	
					Min	Max		
Common mode rejection ratio	CMRR	V _{CC} = 5 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1,2,3	06	82		dB	
			1		94			
		2,3	90					
		V _{CC} = 5 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1	08	90			
			2,3		85			
		V _{CC} = ±15 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1		100			
			2,3		96			
		V _{CC} = 5 V, R _S = 50 Ω, V _{IC} = V _{ICR} min	1,2,3		09	85		
			1			97		
		2,3	93					
Supply voltage rejection ratio (ΔV _{CC} / ΔV _{IO})	kSVR	V _{CC} = 5 V, V _{CC} = 5 V to 30 V	1	01,04, 07	105		dB	
			2,3		100			
		1	02	100				
				2,3	95			
		1	03	98				
				2,3	93			
		1	05	103				
				2,3	98			

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 12

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Supply voltage rejection ratio ($\Delta V_{CC} / \Delta V_{IO}$)	k _{SVR}	V _{CC} = 5 V, V _{CC} = 5 V to 30 V	1	06	100		dB
			2,3		95		
			1	08	105		
			2,3		100		
			1	09	103		
			2,3		98		
		1	01,04, 07	105			
		2,3		100			
		1	02	100			
		2,3		95			
		1	03	98			
		2,3		93			
		1	05	103			
		2,3		98			
		1	06	100			
		2,3		95			
		1	08	105			
		2,3		100			

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 13

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Supply voltage rejection ratio (ΔV _{CC} / ΔV _{IO})	k _{SVR}	V _{CC} = ±15 V,	1	09	103		dB
		V _{CC} = ±2.5 V to ±15 V	2,3		98		
Supply current	I _{CC}	V _{CC} = 5 V, V _O = 2.5 V, no load	1,2,3	01,04, 07		230	μA
				02,05, 08		600	
				03,06, 09		1200	
		V _{CC} = ±15 V, V _O = 0 V, no load		01,04, 07		300	
				02,05, 08		700	
				03,06, 09		1400	
Slew rate at unity gain ^{1/}	SR	V _{CC} = ±15 V, V _O = ±10 V		All	0.45		V/μs
					0.4		

^{1/} See figure 2.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.

3.5 Marking. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device. For RHA product using this option, the RHA designator shall still be marked. Marking for device classes Q and V shall be in accordance with MIL-PRF-38535. Marking for device class M shall be in accordance with MIL-PRF-38535, appendix A.

3.5.1 Certification/compliance mark. The certification mark for device classes Q and V shall be a "QML" or "Q" as required in MIL-PRF-38535. The compliance mark for device class M shall be a "C" as required in MIL-PRF-38535, appendix A.

3.6 Certificate of compliance. For device classes Q and V, a certificate of compliance shall be required from a QML-38535 listed manufacturer in order to supply to the requirements of this drawing (see 6.6.1 herein). For device class M, a certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6.2 herein). The certificate of compliance submitted to DLA Land and Maritime-VA prior to listing as an approved source of supply for this drawing shall affirm that the manufacturer's product meets, for device classes Q and V, the requirements of MIL-PRF-38535 and herein or for device class M, the requirements of MIL-PRF-38535, appendix A and herein.

3.7 Certificate of conformance. A certificate of conformance as required for device classes Q and V in MIL-PRF-38535 or for device class M in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.



STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 14

Device types	01,04,07		02,05,08		03,06,09	
Case outlines	G and P	2	G and P	2	C	2
Terminal number	Terminal symbol					
1	OFFSET N1	NC	OUTPUT 1	NC	OUTPUT 1	NC
2	-INPUT	OFFSET N1	-INPUT 1	OUTPUT 1	-INPUT 1	OUTPUT 1
3	+INPUT	NC	+INPUT 1	NC	+INPUT 1	-INPUT 1
4	-V _{CC} / GND	NC	-V _{CC} / GND	NC	+V _{CC}	+INPUT 1
5	OFFSET N2	-INPUT	+INPUT 2	-INPUT 1	+INPUT 2	NC
6	OUTPUT	NC	-INPUT 2	NC	-INPUT 2	+V _{CC}
7	+V _{CC}	+INPUT	OUTPUT 2	+INPUT 1	OUTPUT 2	NC
8	NC	NC	+V _{CC}	NC	OUTPUT 3	+INPUT 2
9	---	NC	---	NC	-INPUT 3	-INPUT 2
10	---	-V _{CC} / GND	---	-V _{CC} / GND	+INPUT 3	OUTPUT 2
11	---	NC	---	NC	-V _{CC} / GND	NC
12	---	OFFSET N2	---	+INPUT 2	+INPUT 4	OUTPUT 3
13	---	NC	---	NC	-INPUT 4	-INPUT 3
14	---	NC	---	NC	OUTPUT 4	+INPUT 3
15	---	OUTPUT	---	-INPUT 2	---	NC
16	---	NC	---	NC	---	-V _{CC} / GND
17	---	+V _{CC}	---	OUTPUT 2	---	NC
18	---	NC	---	NC	---	+INPUT 4
19	---	NC	---	NC	---	-INPUT 4
20	---	NC	---	+V _{CC}	---	OUTPUT 4

NC = No connection

FIGURE 1. Terminal connections.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 15

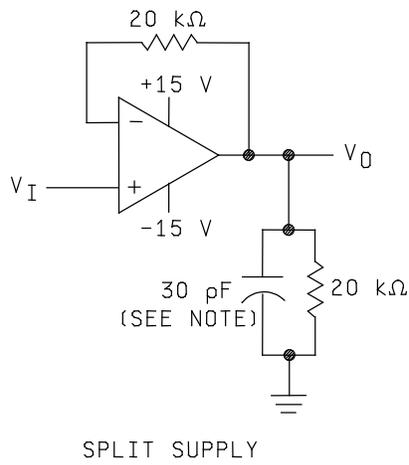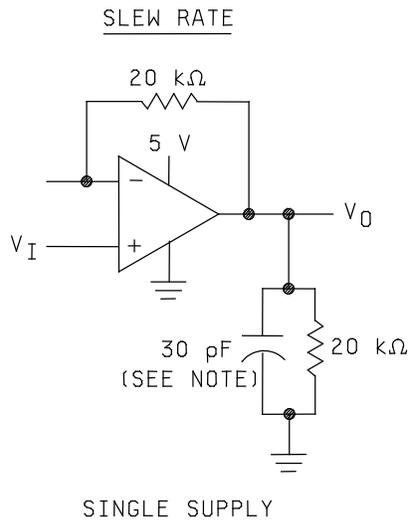

NOTE: C_L includes fixture capacitance.

FIGURE 2. Test circuits.

**STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
E

5962-90881

SHEET
16

3.8 Notification of change for device class M. For device class M, notification to DLA Land and Maritime -VA of change of product (see 6.2 herein) involving devices acquired to this drawing is required for any change that affects this drawing.

3.9 Verification and review for device class M. For device class M, DLA Land and Maritime, DLA Land and Maritime's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

3.10 Microcircuit group assignment for device class M. Device class M devices covered by this drawing shall be in microcircuit group number 49 (see MIL-PRF-38535, appendix A).

4. VERIFICATION

4.1 Sampling and inspection. For device classes Q and V, sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. For device class M, sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. For device classes Q and V, screening shall be in accordance with MIL-PRF-38535, and shall be conducted on all devices prior to qualification and technology conformance inspection. For device class M, screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection.

4.2.1 Additional criteria for device class M.

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition B or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.

(2) $T_A = +125^{\circ}\text{C}$, minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein.

4.2.2 Additional criteria for device classes Q and V.

a. The burn-in test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document revision level control of the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.

b. Interim and final electrical test parameters shall be as specified in table II herein.

c. Additional screening for device class V beyond the requirements of device class Q shall be as specified in MIL-PRF-38535, appendix B.

4.3 Qualification inspection for device classes Q and V. Qualification inspection for device classes Q and V shall be in accordance with MIL-PRF-38535. Inspections to be performed shall be those specified in MIL-PRF-38535 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 17

TABLE II. Electrical test requirements.

Test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)	Subgroups (in accordance with MIL-PRF-38535, table III)	
	Device class M	Device class Q	Device class V
Interim electrical parameters (see 4.2)	1	---	1
Final electrical parameters (see 4.2)	1, 2, 3, 4 <u>1/</u>	1, 2, 3, 4 <u>1/</u>	1, 2, 3, 4 <u>1/</u>
Group A test requirements (see 4.4)	1, 2, 3, 4, 5, 6	1, 2, 3, 4, 5, 6	1, 2, 3, 4, 5, 6
Group C end-point electrical parameters (see 4.4)	1	1	---
Group D end-point electrical parameters (see 4.4)	1	1	1
Group E end-point electrical parameters (see 4.4)	1,4	1,4	1,4

1/ PDA applies to subgroup 1 with exception of V_{IO} .

4.4 Conformance inspection. Technology conformance inspection for classes Q and V shall be in accordance with MIL-PRF-38535 including groups A, B, C, D, and E inspections and as specified herein. Quality conformance inspection for device class M shall be in accordance with MIL-PRF-38535, appendix A and as specified herein. Inspections to be performed for device class M shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. Subgroups 7, 8, 9, 10, and 11 in table I, method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group C inspection. The group C inspection end-point electrical parameters shall be as specified in table II herein.

4.4.2.1 Additional criteria for device class M. Steady-state life test conditions, method 1005 of MIL-STD-883:

- a. Test condition B or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.
- b. $T_A = +125^\circ\text{C}$, minimum.
- c. Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.4.2.2 Additional criteria for device classes Q and V. The steady-state life test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The test circuit shall be maintained under document revision level control by the device manufacturer's TRB in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 18

4.4.3 Group D inspection. The group D inspection end-point electrical parameters shall be as specified in table II herein.

4.4.4 Group E inspection. Group E inspection is required only for parts intended to be marked as radiation hardness assured (see 3.5 herein).

- a. End-point electrical parameters shall be as specified in table II herein.
- b. For device classes Q and V, the devices or test vehicle shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535 for the RHA level being tested. For device class M, the devices shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535, appendix A for the RHA level being tested. All device classes must meet the postirradiation end-point electrical parameter limits as defined in table I at $T_A = +25^{\circ}\text{C} \pm 5^{\circ}\text{C}$, after exposure, to the subgroups specified in table II herein.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.1.1 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor prepared specification or drawing.

6.1.2 Substitutability. Device class Q devices will replace device class M devices.

6.2 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished using DD Form 1692, Engineering Change Proposal.

6.3 Record of users. Military and industrial users should inform DLA Land and Maritime when a system application requires configuration control and which SMD's are applicable to that system. DLA Land and Maritime will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DLA Land and Maritime -VA, telephone (614) 692-0544.

6.4 Comments. Comments on this drawing should be directed to DLA Land and Maritime -VA, Columbus, Ohio 43218-3990, or telephone (614) 692-0540.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535 and MIL-HDBK-1331.

6.6 Sources of supply.

6.6.1 Sources of supply for device classes Q and V. Sources of supply for device classes Q and V are listed in QML-38535. The vendors listed in QML-38535 have submitted a certificate of compliance (see 3.6 herein) to DLA Land and Maritime -VA and have agreed to this drawing.

6.6.2 Approved sources of supply for device class M. Approved sources of supply for class M are listed in MIL-HDBK-103. The vendors listed in MIL-HDBK-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DLA Land and Maritime -VA.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90881
		REVISION LEVEL E	SHEET 19

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 11-10-03

Approved sources of supply for SMD 5962-90881 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DLA Land and Maritime -VA. This information bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535. DLA Land and Maritime maintains an online database of all current sources of supply at <http://www.landandmaritime.dla.mil/Programs/Smcr/>.

Standard microcircuit drawing PIN <u>1</u> /	Vendor CAGE number	Vendor similar PIN <u>2</u> /
5962-9088101MGA	<u>3</u> /	TLE2021MLB
5962-9088101MPA	01295	TLE2021MJGB
5962-9088101M2A	01295	TLE2021MFKB
5962-9088102MGA	<u>3</u> /	TLE2022MLB
5962-9088102MPA	01295	TLE2022MJGB
5962-9088102M2A	01295	TLE2022MFKB
5962-9088103MCA	01295	TLE2024MJGB
5962-9088103M2A	01295	TLE2024MFKB
5962-9088104QPA	01295	TLE2021AMJGB
5962-9088104Q2A	01295	TLE2021AMFKB
5962-9088105QPA	01295	TLE2022AMJGB
5962-9088105Q2A	01295	TLE2022AMFKB
5962-9088106QCA	01295	TLE2024AMJB
5962-9088106Q2A	01295	TLE2024AMFKB
5962-9088107QPA	01295	TLE2021BMJGB
5962-9088107Q2A	01295	TLE2021BMFKB

STANDARD MICROCIRCUIT DRAWING BULLETIN - CONTINUED

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
5962-9088108QPA	01295	TLE2022BMJGB
5962-9088108Q2A	01295	TLE2022BMFKB
5962-9088109QCA	01295	TLE2024BMJB
5962-9088109Q2A	01295	TLE2024BMFKB

1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.

2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

3/ Not available from an approved source of supply.

Vendor CAGE
number

01295

Vendor name
and address

Texas Instruments, Incorporated
Semiconductor Group
8505 Forest Lane
P.O. Box 660199
Dallas, TX 75243

Point of contact: U.S. Highway 75 South
P.O. Box 84, M/S 853
Sherman, TX 75090-9493

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.