

1. SCOPE

1.1 Scope. This drawing documents the general requirements of a high performance dual retriggerable monostable multivibrator with Schmitt-trigger inputs microcircuit, with an operating temperature range of -40°C to +105°C.

1.2 Vendor Item Drawing Administrative Control Number. The manufacturer's PIN is the item of identification. The vendor item drawing establishes an administrative control number for identifying the item on the engineering documentation:

<u>V62/03661</u> Drawing number	-	<u>01</u> Device type (See 1.2.1)	<u>X</u> Case outline (See 1.2.2)	<u>E</u> Lead finish (See 1.2.3)
---------------------------------------	---	---	---	--

1.2.1 Device type(s).

<u>Device type</u>	<u>Generic</u>	<u>Circuit function</u>
01	74LV123A-EP	Dual retriggerable monostable multivibrator with Schmitt-trigger inputs

1.2.2 Case outline. The case outline are as specified herein.

<u>Outline letter</u>	<u>Number of pins</u>	<u>JEDEC PUB 95</u>	<u>Package style</u>
X	14	JEDEC MO-153	Plastic small-outline

1.2.3 Lead finishes. The lead finishes are as specified below or other lead finishes as provided by the device manufacture:

<u>Finish designator</u>	<u>Material</u>
A	Hot solder dip
B	Tin-lead plate
C	Gold plate
D	Palladium
E	Gold flash palladium
Z	Other

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 2

1.3 Absolute maximum ratings. 1/

Supply voltage range (V_{CC})	-0.5 V to +7.0 V
Input voltage range (V_i)	-0.5 V to +7.0 V 2/
Voltage range applied to any output in the high-impedance or power-off state (V_o)	-0.5 V to +7.0 V 2/
Output voltage range in high or low state (V_o)	-0.5 V to $V_{CC} + 0.5$ V 2/ 3/
Output voltage range in power-off state (V_o)	-0.5 V to + 7.0 V 2//
Input clamp current (I_{IK}) ($V_i < 0$)	-20 mA
Output clamp current (I_{OK}) ($V_o < 0$ or $V_o > V_{CC}$)	± 50 mA
Continuous output current (I_o) ($V_o = 0$ to V_{CC})	± 25 mA
Continuous current through V_{CC} or GND	± 50 mA
Package thermal impedance (θ_{JA})	113°C/W 4/
Storage temperature range (T_{STG})	-65°C to +150°C

1.4 Recommended operating conditions. 5/ 6/

Supply voltage range (V_{CC})	2.0 V to 5.5 V
Minimum high level input voltage (V_{IH}):	
$V_{CC} = 2.0$ V	1.5 V
$V_{CC} = 2.3$ V to 2.7 V	$V_{CC} \times 0.7$
$V_{CC} = 3.0$ V to 3.6 V	$V_{CC} \times 0.7$
$V_{CC} = 4.5$ V to 5.5 V	$V_{CC} \times 0.7$
Maximum low level input voltage (V_{IL}):	
$V_{CC} = 2.0$ V	0.5 V
$V_{CC} = 2.3$ V to 2.7 V	$V_{CC} \times 0.3$
$V_{CC} = 3.0$ V to 3.6 V	$V_{CC} \times 0.3$
$V_{CC} = 4.5$ V to 5.5 V	$V_{CC} \times 0.3$
Input voltage range (V_i)	0.0 V to 5.5 V
Output voltage range (V_o)	0.0 V to V_{CC}
Maximum high level output current (I_{OH}):	
$V_{CC} = 2.0$ V	-50 μ A
$V_{CC} = 2.3$ V to 2.7 V	-2 mA
$V_{CC} = 3.0$ V to 3.6 V	-6 mA
$V_{CC} = 4.5$ V to 5.5 V	-12 mA
Maximum low level output current (I_{OL}):	
$V_{CC} = 2.0$ V	50 μ A
$V_{CC} = 2.3$ V to 2.7 V	2 mA
$V_{CC} = 3.0$ V to 3.6 V	6 mA
$V_{CC} = 4.5$ V to 5.5 V	12 mA

- 1/ Stresses beyond those listed under “absolute maximum rating” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- 2/ The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
- 3/ This value is limited to 5.5 V maximum.
- 4/ The package thermal impedance is calculated in accordance with JESD 51-7.
- 5/ Use of this product beyond the manufacturers design rules or stated parameters is done at the user’s risk. The manufacturer and/or distributor maintain no responsibility or liability for product used beyond the stated limits.
- 6/ All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 3

1.4 Recommended operating conditions - Continued. 5/ 6/

External timing resistance (R_{ext}):

$V_{CC} = 2.0\text{ V}$ 5 k Ω

$V_{CC} \geq 3.0\text{ V}$ 1 k Ω

External timing capacitance No restriction

Minimum power-up ramp rate ($\Delta t/\Delta V_{CC}$) 1 ms/V

Operating free-air temperature range (T_A) -40°C to +105°C

2. APPLICABLE DOCUMENTS

- JEDEC PUB 95 - Registered and Standard Outlines for Semiconductor Devices
- JESD 51-7 - High Effective Thermal Conductivity Test Board for Leaded Surface Mount Packages

(Applications for copies should be addressed to the Electronic Industries Alliance, 2500 Wilson Boulevard, Arlington, VA 22201-3834 or online at <http://www.jedec.org>)

3. REQUIREMENTS

3.1 Marking. Parts shall be permanently and legibly marked with the manufacturer's part number as shown in 6.3 herein and as follows:

- A. Manufacturer's name, CAGE code, or logo
- B. Pin 1 identifier
- C. ESDS identification (optional)

3.2 Unit container. The unit container shall be marked with the manufacturer's part number and with items A and C (if applicable) above.

3.3 Electrical characteristics. The maximum and recommended operating conditions and electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.4 Design, construction, and physical dimension. The design, construction, and physical dimensions are as specified herein.

3.5 Diagrams.

3.5.1 Case outline. The case outline shall be as shown in 1.2.2 and figure 1.

3.5.2 Truth table. The truth table shall be as shown in figure 2.

3.5.3 Logic diagram. The logic diagram shall be as shown in figure 3.

3.5.4 Terminal connections. The terminal connections shall be as shown in figure 4.

3.5.5 Timing waveforms and test circuit. The timing waveforms and test circuit shall be as shown in figure 5.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 4

TABLE I. Electrical performance characteristics. 1/

Test	Symbol	Conditions	V _{CC}	Temperature, T _A	Device type	Limits		Unit
						Min	Max	
High level output voltage	V _{OH}	I _{OH} = -50 μA	2.0 V to 5.5 V	25°C, -55°C to 125°C	01	V _{CC} - 0.1		V
		I _{OH} = -2 mA	2.3 V	25°C, -55°C to 125°C		2.0		
		I _{OH} = -6 mA	3.0 V	25°C, -55°C to 125°C		2.48		
		I _{OH} = -12 mA	4.5 V	25°C, -55°C to 125°C		3.8		
Low level output voltage	V _{OH}	I _{OL} = 50 μA	2.0 V to 5.5 V	25°C, -55°C to 125°C	01		0.1	V
		I _{OL} = 2 mA	2.3 V	25°C, -55°C to 125°C			0.4	
		I _{OL} = 6 mA	3.0 V	25°C, -55°C to 125°C			0.44	
		I _{OL} = 12 mA	4.5 V	25°C, -55°C to 125°C			0.55	
Input current	I _I	R _{ext} /C _{ext} 2/ V _I = 5.5 V or GND	2.0 V to 5.5 V	25°C, -55°C to 125°C	01		±2.5	μA
		\overline{A} , B, and \overline{CLR} V _I = 5.5 V or GND	0.0 V				±1.0	
			0.0 V to 5.5 V				±1.0	
Quiescent supply current	I _{CC}	V _I = V _{CC} or GND I _O = 0 A	5.5 V	25°C, -55°C to 125°C	01		20.0	μA
Active state supply current (per circuit)	I _{CC}	V _I = V _{CC} or GND R _{ext} /C _{ext} = 0.5V _{CC}	3.0 V	25°C, -55°C to 125°C	01		280	μA
			4.5 V				650	
			5.5 V				975	
Input/output power-off leakage current	I _{off}	V _I or V _O = 0.0 V to 5.5 V	0.0 V	25°C, -55°C to 125°C	01		5.0	μA
Input capacitance	C _I	V _I = V _{CC} or GND	3.3 V	25°C, -55°C to 125°C	01	1.9 TYP		pF
			5.0 V			1.9 TYP		
Power dissipation capacitance	C _{pd}	C _L = 50 pF f = 10 MHz	3.3 V	25°C, -55°C to 125°C	01	44 TYP		pF
			5.0 V			49 TYP		

See footnote at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 5

TABLE I. Electrical performance characteristics - Continued. 1/

Test	Symbol	Conditions	V _{CC}	Temperature, T _A	Device type	Limits		Unit
						Min	Max	
Pulse duration	t _w	$\overline{\text{CLR}}$ See figure 5	3.0 V and 3.6 V	25°C	01	5.0		ns
				-55°C to 125°C		5.0		
		$\overline{\text{A}}$ or B trigger See figure 5	4.5 V and 5.5 V	25°C		5.0		
				-55°C to 125°C		5.0		
		$\overline{\text{CLR}}$ See figure 5	4.5 V and 5.5 V	25°C		5.0		
				-55°C to 125°C		5.0		
$\overline{\text{A}}$ or B trigger See figure 5	4.5 V and 5.5 V	25°C	5.0					
		-55°C to 125°C	5.0					
Pulse retrigger time	t _{rr}	R _{ext} = 1 kΩ C _{ext} = 100 pF See figure 5	3.0 V and 3.6 V	25°C	01	76 TYP		ns
				25°C		1.8 TYP		
		R _{ext} = 1 kΩ C _{ext} = 0.01 μF See figure 5	4.5 V and 5.5 V	25°C		59 TYP		
				25°C		1.5 TYP		
Propagation delay — time, A or B to Q or Q	t _{PLH} , t _{PHL}	C _L = 50 pF See figure 5	3.0 V and 3.6 V	25°C	01		24.1	ns
				-55°C to 125°C		1.0	27.5	
			4.5 V and 5.5 V	25°C			14.0	
				-55°C to 125°C		1.0	16.0	
Propagation delay — time, CLR to Q or Q	t _{PLH} , t _{PHL}	C _L = 50 pF See figure 5	3.0 V and 3.6 V	25°C	01		19.3	ns
				-55°C to 125°C		1.0	22.0	
			4.5 V and 5.5 V	25°C			11.4	
				-55°C to 125°C		1.0	13.0	

See footnote at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 6


TABLE I. Electrical performance characteristics - Continued. 1/

Test	Symbol	Conditions	V _{CC}	Temperature, T _A	Device type	Limits		Unit
						Min	Max	
Propagation delay time, CLR trigger to Q or Q	t _{PLH} , t _{PHL}	C _L = 50 pF See figure 5	3.0 V and 3.6 V	25°C	01		25.9	ns
				-55°C to 125°C		1.0	29.5	
			4.5 V and 5.5 V	25°C			14.9	
				-55°C to 125°C		1.0	17.0	
Pulse duration at Q or Q outputs	t _w	R _{ext} = 2 kΩ C _{ext} = 28 pF C _L = 50 pF, See figure 5	3.0 V and 3.6 V	25°C	01		240	ns
				-55°C to 125°C			300	
		R _{ext} = 10 kΩ C _{ext} = 0.01 μF C _L = 50 pF, See figure 5	25°C, -55°C to 125°C	90		110		
				R _{ext} = 10 kΩ C _{ext} = 0.1 μF C _L = 50 pF, See figure 5		25°C, -55°C to 125°C	0.9	1.1
		R _{ext} = 2 kΩ C _{ext} = 28 pF C _L = 50 pF, See figure 5	4.5 V and 5.5 V				25°C	
				-55°C to 125°C			240	
		R _{ext} = 10 kΩ C _{ext} = 0.01 μF C _L = 50 pF, See figure 5	25°C, -55°C to 125°C	90		110		
R _{ext} = 10 kΩ C _{ext} = 0.1 μF C _L = 50 pF, See figure 5	25°C, -55°C to 125°C			0.9	1.1	ms		
		Pulse variation at Q or Q outputs	Δt _w <u>3/</u>	C _L = 50 pF	3.0 V and 3.6 V	25°C	01	±1
4.5 V and 5.5 V	25°C							±1

- 1/ Testing and other quality control techniques are used to the extent deemed necessary to assure product performance over the specified temperature range. Product may not necessarily be tested across the full temperature range and all parameters may not necessarily be tested. In the absence of specific parametric testing, product performance is assured by characterization and/or design.
- 2/ This test is performed with the terminal in the off-state condition.
- 3/ Output pulse-duration variation (Q and Q) between circuits in the same package.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 7

Case X

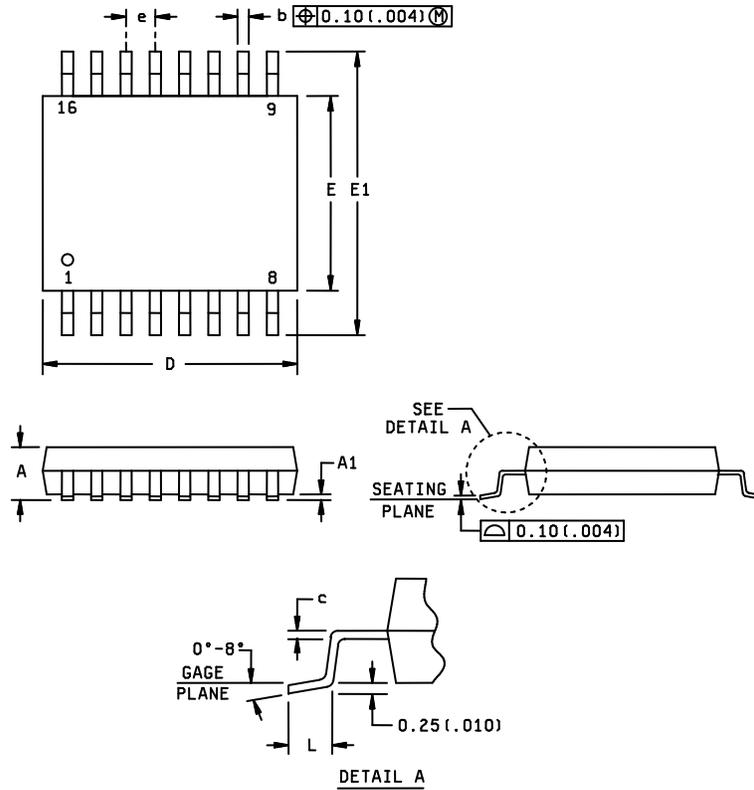

Dimensions									
Symbol	Millimeters		Inches		Symbol	Millimeters		Inches	
	Min	Max	Min	Max		Min	Max	Min	Max
A	---	1.20	---	.047	E	4.30	4.50	.169	.177
A1	0.05	0.15	.002	.006	E1	6.20	6.60	.244	.260
b	0.19	0.30	.007	.012	e	0.65 NOM		.026 NOM	
c	0.15 NOM		.006 NOM		L	0.50	0.75	.020	.030
D	4.90	5.10	.193	.201					

NOTES:

1. This drawing is subject to change without notice.
2. Body dimensions do not include mold flash or protrusion not to exceed 0.15 mm.
3. Falls within JEDEC MO-153.
4. All linear dimensions are shown in millimeters (inches). Inches equivalents are given for general information only.

FIGURE 1. Case outlines.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 8

(each multivibrator)

Inputs			Outputs	
$\overline{\text{CLR}}$	$\overline{\text{A}}$	B	Q	$\overline{\text{Q}}$
L	X	X	L	H
X	H	X	L*	H*
X	X	L	L*	H*
H	L	↑	□	□
H	↓	H	□	□
↑	L	H	□	□

X = Immaterial

* = These outputs are based on the assumption that the indicated steady-state conditions at the A and B inputs have been set up long enough to complete any pulse started before the setup.

↑ = Rising edge of pulse.

↓ = Falling edge of pulse.

□ = Positive pulse

□ = Negative pulse

FIGURE 2. Truth table.

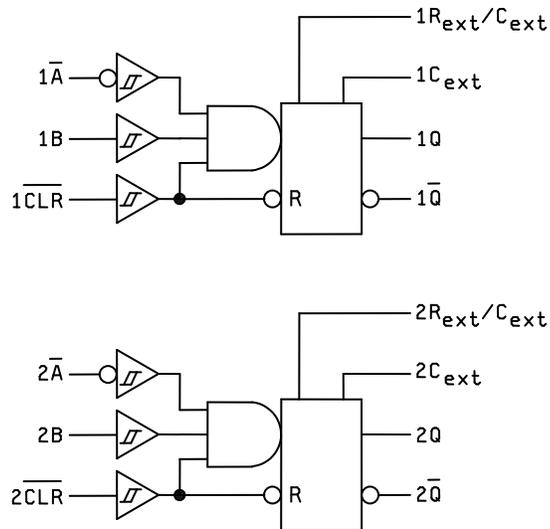


FIGURE 3. Logic diagram.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 9

Device type 01			
Case outlines: X			
Terminal number	Terminal symbol	Terminal number	Terminal symbol
1	1 \bar{A}	9	2 \bar{A}
2	1B	10	2B
3	1 \overline{CLR}	11	2 \overline{CLR}
4	1 \bar{Q}	12	2 \bar{Q}
5	2Q	13	1Q
6	2 C_{ext}	14	1 C_{ext}
7	2 R_{ext}/C_{ext}	15	1 C_{ext}/R_{ext}
8	GND	16	V_{CC}

FIGURE 4. Terminal connections.


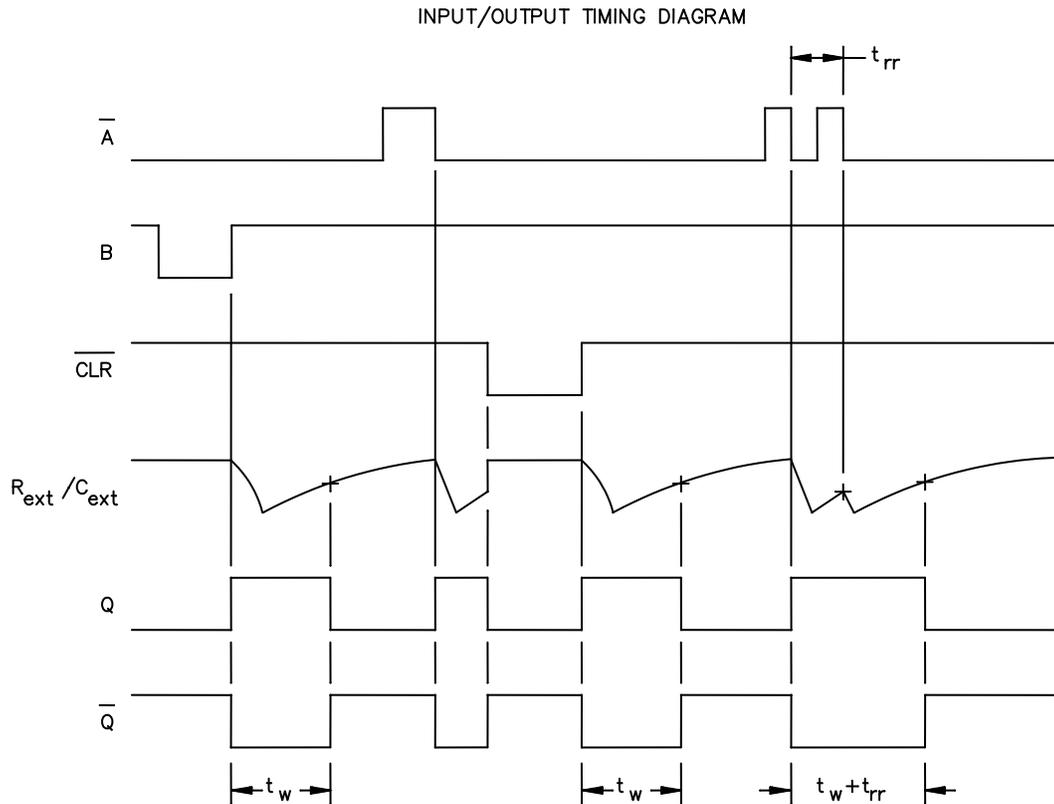


FIGURE 5. Timing waveforms and test circuit.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 10

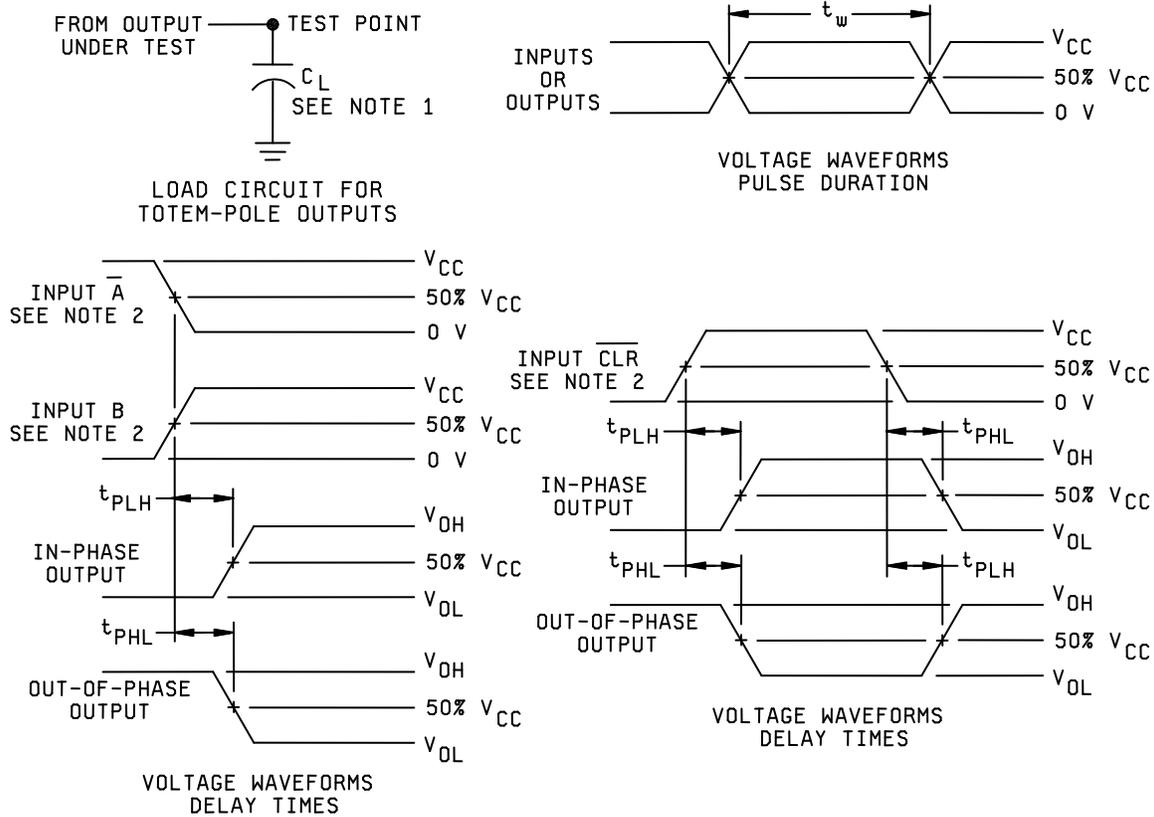

Notes:

1. C_L includes probe and jig capacitance.
2. All input pulses are supplied by generators having the following characteristics: $PRR \leq 1 \text{ MHz}$, $Z_O = 50\Omega$, $t_r \leq 3 \text{ ns}$, $t_f \leq 3 \text{ ns}$.
3. The outputs are measured one at a time with one input transition per measurement.

FIGURE 5. Timing waveforms and test circuit - Continued.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 11

4. QUALITY ASSURANCE PROVISIONS

4.1 Product assurance requirements. The manufacturer is responsible for performing all inspection and test requirements as indicated in their internal documentation. Such procedures should include proper handling of electrostatic sensitive devices, classification, packaging, and labeling of moisture sensitive devices, as applicable.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Preservation, packaging, labeling, and marking shall be in accordance with the manufacturer's standard commercial practices for electrostatic discharge sensitive devices.

6. NOTES

6.1 ESDS. Devices are electrostatic discharge sensitive and are classified as ESDS class 1 minimum.

6.2 Configuration control. The data contained herein is based on the salient characteristics of the device manufacturer's data book. The device manufacturer reserves the right to make changes without notice. This drawing will be modified as changes are provided.

6.3 Suggested source(s) of supply. Identification of the suggested source(s) of supply herein is not to be construed as a guarantee of present or continued availability as a source of supply for the item.

Vendor item drawing administrative control number <u>1/</u>	Device manufacturer CAGE code	Vendor part number	Top-Side Marking
V62/03661-01XE	01295	SN74LV123ATPWREP	L123AEP

1/ The vendor item drawing establishes an administrative control number for identifying the item on the engineering documentation.

CAGE code

01295

Source of supply

Texas Instruments, Inc.
 Semiconductor Group
 8505 Forest lane
 P.O. Box 660199
 Dallas, TX 75243
 Point of contact: U.S. Highway 75 South
 P.O. Box 84, M/S 853
 Sherman, TX 75090-9493

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/03661
		REV A	PAGE 12