

1. SCOPE

1.1 Scope. This drawing documents the general requirements of a high performance 16-bit transparent D-type latch with 3-state outputs microcircuit, with an operating temperature range of -55°C to +125°C.

1.2 Vendor Item Drawing Administrative Control Number. The manufacturer's PIN is the item of identification. The vendor item drawing establishes an administrative control number for identifying the item on the engineering documentation:

<u>V62/06628</u>	-	<u>01</u>	<u>X</u>	<u>E</u>
Drawing number		Device type (See 1.2.1)	Case outline (See 1.2.2)	Lead finish (See 1.2.3)

1.2.1 Device type(s).

<u>Device type</u>	<u>Generic</u>	<u>Circuit function</u>
01	SN74ABT16373A-EP	16-bit transparent D-type latch with 3-state outputs

1.2.2 Case outline(s). The case outline(s) are as specified herein.

<u>Outline letter</u>	<u>Number of pins</u>	<u>JEDEC PUB 95</u>	<u>Package style</u>
X	48	MO-118	Plastic small outline

1.2.3 Lead finishes. The lead finishes are as specified below or other lead finishes as provided by the device manufacturer:

<u>Finish designator</u>	<u>Material</u>
A	Hot solder dip
B	Tin-lead plate
C	Gold plate
D	Palladium
E	Gold flash palladium
Z	Other

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 2

1.3 Absolute maximum ratings. 1/

Supply voltage range (V_{CC})	-0.5 V to 7 V
Input voltage range (V_i)	-0.5 V to 7 V 2/
Voltage range applied to any output in the high or power-off state (V_o)	-0.5 V to 5.5 V
Maximum current into any output in the low state (I_o)	96 mA
Maximum input clamp current (I_{IK}), ($V_i < 0$)	-18 mA
Maximum output clamp current (I_{OK}), ($V_o < 0$)	-50 mA
Maximum package thermal impedance (θ_{JA})	94°C/W 3/
Storage temperature range (T_{STG})	-65°C to +150°C

1.4 Recommended operating conditions. 4/

Supply voltage range (V_{CC})	4.5 V to 5.5 V
Minimum high-level input voltage (V_{IH})	2 V
Maximum low-level input voltage (V_{IL})	0.8 V
Input voltage range (V_i)	0 V to V_{CC}
Maximum high-level output current (I_{OH})	-24 mA
Maximum low-level output current (I_{OL})	48 mA
Maximum input transition rise and fall rate ($\Delta t/\Delta V$) (Outputs enabled)	10 ns/V
Minimum power-up ramp rate ($\Delta t/\Delta V_{CC}$)	200 μ s/V
Operating free-air temperature range (T_A)	-55°C to +125°C

- 1/ Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- 2/ The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
- 3/ The package and thermal impedance is calculated in accordance with EIA/JEDEC Std JESD 51.
- 4/ Unused inputs must be held high or low to prevent them from floating.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 3

2. APPLICABLE DOCUMENTS

JEDEC – SOLID STATE TECHNOLOGY ASSOCIATION (JEDEC)

JEP95	–	Registered and Standard Outlines for Semiconductor Devices
JESD51-7	–	High Effective Thermal Conductivity Test Board for Leaded Surface Mount Packages

(Copies of these documents are available online at <http://www.jedec.org> or from JEDEC – Solid State Technology Association, 3103 North 10th Street, Suite 240–S, Arlington, VA 22201-2107).

3. REQUIREMENTS

3.1 Marking. Parts shall be permanently and legibly marked with the manufacturer's part number as shown in 6.3 herein and as follows:

- A. Manufacturer's name, CAGE code, or logo
- B. Pin 1 identifier
- C. ESDS identification (optional)

3.2 Unit container. The unit container shall be marked with the manufacturer's part number and with items A and C (if applicable) above.

3.3 Electrical characteristics. The maximum and recommended operating conditions and electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.4 Design, construction, and physical dimension. The design, construction, and physical dimensions are as specified herein.

3.5 Diagrams.

3.5.1 Case outlines. The case outlines shall be as shown in 1.2.2 and figure 1.

3.5.2 Terminal connections. The terminal connections shall be as shown in figure 2.

3.5.3 Function table. The function table shall be as shown in figure 3.

3.5.4 Logic diagram. The logic diagram shall be as shown in figure 4.

3.5.5 Timing waveforms and test circuit. The timing waveforms and test circuit shall be as shown in figure 5.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 4

TABLE I. Electrical performance characteristics. 1/

Test	Symbol	Conditions	Temperature, T _A	Device type	Limits		Unit
					Min	Max	
Electrical Characteristics							
Input clamp voltage	V _{IK}	V _{CC} = 4.5 V, I _I = -18 mA	+25°C	01		-1.2	V
			-55°C to +125°C			-1.2	
High-level output voltage	V _{OH}	V _{CC} = 4.5 V, I _{OH} = -3 mA	+25°C		2.5		V
			-55°C to +125°C		2.5		
		V _{CC} = 5 V, I _{OH} = -3 mA	+25°C		3		
			-55°C to +125°C		3		
V _{CC} = 4.5 V, I _{OH} = -24 mA	+25°C	2					
	-55°C to +125°C	2					
Low-level output voltage	V _{OL}	V _{CC} = 4.5 V, I _{OL} = 48 mA	+25°C			0.55	V
			-55°C to +125°C			0.55	
Hysteresis voltage	V _{hys}	V _{CC} = 5 V	+25°C		100 TYP		mV
Input current	I _I	V _{CC} = 0 V to 5.5 V, V _I = V _{CC} or GND	+25°C			±1	μA
			-55°C to +125°C			±1	
3-state output current power-up	I _{OZPU} 2/	V _{CC} = 0 V to 2.1 V, — V _O = 0.5 V to 2.7 V, OE = X	+25°C			±50	μA
			-55°C to +125°C			±50	
3-state output current power-down	I _{OZPD} 2/	V _{CC} = 2.1 V to 0 V, — V _O = 0.5 V to 2.7 V, OE = X	+25°C			±50	μA
			-55°C to +125°C			±50	
3-state output leakage current high	I _{OZH}	V _{CC} = 2.1 V to 5.5 V, V _O = 2.7 V, OE ≥ 2 V	+25°C			10	μA
			-55°C to +125°C			10	
3-state output leakage current low	I _{OZL}	V _{CC} = 2.1 V to 5.5 V, V _O = 0.5 V, OE ≥ 2 V	+25°C			-10	μA
			-55°C to +125°C			-10	
Input/output power-off leakage current	I _{off}	V _{CC} = 0 V, V _I or V _O ≤ 4.5 V	+25°C			±100	μA
Output high leakage current	I _{CEX}	Outputs high V _{CC} = 5.5 V, V _O = 5.5 V	+25°C			50	μA
			-55°C to +125°C			50	
Output current	I _O 3/	V _{CC} = 5.5 V, V _O = 2.5 V	+25°C		-50	-180	mA
			-55°C to +125°C		-50	-180	

See footnotes at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 5

TABLE I. Electrical performance characteristics – Continued. 1/

Test	Symbol	Conditions	Temperature, T _A	Device type	Limits		Unit
					Min	Max	
Electrical Characteristics - Continued.							
Quiescent supply current	I _{CC}	Outputs high V _{CC} = 5.5 V, I _O = 0, V _I = V _{CC} or GND	+25°C	01		2	mA
			-55°C to +125°C			2	
		Outputs low V _{CC} = 5.5 V, I _O = 0, V _I = V _{CC} or GND	+25°C			85	
			-55°C to +125°C			85	
Outputs disabled V _{CC} = 5.5 V, I _O = 0, V _I = V _{CC} or GND	+25°C		2				
	-55°C to +125°C		2				
Quiescent supply current delta	ΔI _{CC} 4/	V _{CC} = 5.5 V, One input at 3.4 V, Other inputs at V _{CC} or GND.	+25°C			1.5	mA
			-55°C to +125°C			1.5	
Input capacitance	C _i	V _{CC} = 5 V, V _I = 2.5 V or 0.5 V	+25°C		3.5 TYP	pF	
Output capacitance	C _o	V _{CC} = 5 V, V _O = 2.5 V or 0.5 V	+25°C		9.5 TYP	pF	

Timing Requirements

Pulse duration, LE high	t _w	V _{CC} = 5 V, See figure 5.	+25°C	01	3.3		ns
		V _{CC} = 4.5 V and 5.5 V, See figure 5.	-55°C to +125°C		3.3		
Setup time, data before LE ↓	t _w	V _{CC} = 5 V, See figure 5.	+25°C		1.5		ns
		V _{CC} = 4.5 V and 5.5 V, See figure 5.	-55°C to +125°C		2.4		
Hold time, data after LE ↓	t _w	V _{CC} = 5 V, See figure 5.	+25°C		1		ns
		V _{CC} = 4.5 V and 5.5 V, See figure 5.	-55°C to +125°C		2.2		

Switching Characteristics

Propagation delay time, D to Q	t _{PLH}	V _{CC} = 5 V, C _L = 50 pF, See figure 5.	+25°C	01	1.4	5.3	ns
		V _{CC} = 4.5 V and 5.5 V, C _L = 50 pF, See figure 5.	-55°C to +125°C		1.4	6.5	
	t _{PHL}	V _{CC} = 5 V, C _L = 50 pF, See figure 5.	+25°C		2	5.4	
		V _{CC} = 4.5 V and 5.5 V, C _L = 50 pF, See figure 5.	-55°C to +125°C		2	6.5	

See footnotes at end of table.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 6


TABLE I. Electrical performance characteristics – Continued. 1/

Test	Symbol	Conditions	Temperature, T _A	Device type	Limits		Unit
					Min	Max	
Switching Characteristics							
Propagation delay time, LE to Q	t _{PLH}	V _{CC} = 5 V, C _L = 50 pF, See figure 5.	+25°C		1.7	5.7	ns
		V _{CC} = 4.5 V and 5.5 V, C _L = 50 pF, See figure 5.	-55°C to +125°C		1.7	7	
	t _{PHL}	V _{CC} = 5 V, C _L = 50 pF, See figure 5.	+25°C		2.3	5.6	ns
		V _{CC} = 4.5 V and 5.5 V, C _L = 50 pF, See figure 5.	-55°C to +125°C		2.3	6.3	
Propagation delay time, output enable, OE to Q	t _{PZH}	V _{CC} = 5 V, C _L = 50 pF, See figure 5.	+25°C		1.1	5	ns
		V _{CC} = 4.5 V and 5.5 V, C _L = 50 pF, See figure 5.	-55°C to +125°C		1.1	6.4	
	t _{PZL}	V _{CC} = 5 V, C _L = 50 pF, See figure 5.	+25°C		1.5	4.9	ns
		V _{CC} = 4.5 V and 5.5 V, C _L = 50 pF, See figure 5.	-55°C to +125°C		1.5	5.8	
Propagation delay time, output disable, OE to Q	t _{PHZ}	V _{CC} = 5 V, C _L = 50 pF, See figure 5.	+25°C	2.4	7.1	ns	
		V _{CC} = 4.5 V and 5.5 V, C _L = 50 pF, See figure 5.	-55°C to +125°C	2.4	8.3		
	t _{PLZ}	V _{CC} = 5 V, C _L = 50 pF, See figure 5.	+25°C	1.6	6.3	ns	
		V _{CC} = 4.5 V and 5.5 V, C _L = 50 pF, See figure 5.	-55°C to +125°C	1.6	8		

- 1/ Testing and other quality control techniques are used to the extent deemed necessary to assure product performance over the specified temperature range. Product may not necessarily be tested across the full temperature range and all parameters may not necessarily be tested. In the absence of specific parametric testing, product performance is assured by characterization and/or design.
- 2/ This parameter is characterized, but not production tested.
- 3/ Not more than one output should be tested at a time, and the duration of the test should not exceed one second.
- 4/ This is the increase in supply current for each input that is at the specified TTL voltage level, rather than V_{CC} or GND.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 7

Case X

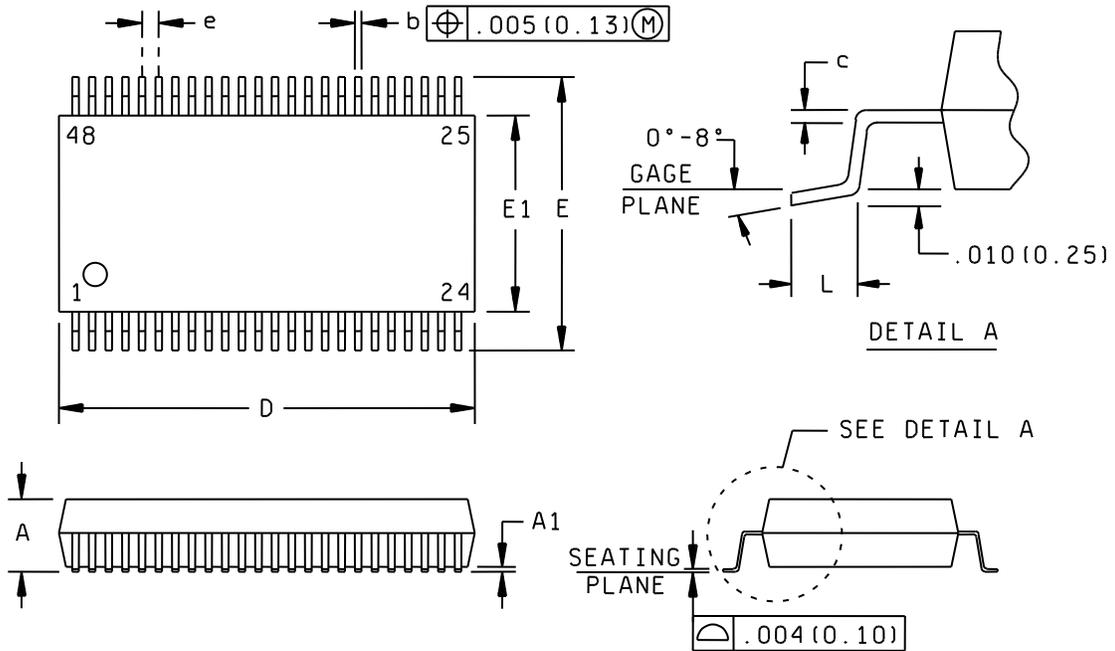

Dimensions									
Symbol	Inches		Millimeters		Symbol	Inches		Millimeters	
	Min	Max	Min	Max		Min	Max	Min	Max
A	---	0.110	---	2.79	e	0.025 Nominal		0.635 Nominal	
A1	0.008	---	0.20	---	E	0.395	0.420	10.03	10.67
b	0.008	0.0135	0.203	0.343	E1	0.291	0.299	7.39	7.59
c	0.005	0.010	0.13	0.25	L	0.020	0.040	0.51	1.02
D	0.620	0.630	15.75	16.00					

NOTES:

1. All linear dimensions are inches (millimeters are shown for reference).
2. This drawing is subject to change without notice.
3. Body dimensions do not include mold flash or protrusion not exceed 0.006 inch (0.15 mm).
4. Falls within JEDEC MO-118.

FIGURE 1. Case outlines.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 8

Device Type:		01			
Case Outline:		X			
Terminal Number	Terminal Symbol	Terminal Number	Terminal Symbol	Terminal Number	Terminal Symbol
1	$\overline{1OE}$	17	2Q4	33	2D3
2	1Q1	18	V _{CC}	34	GND
3	1Q2	19	2Q5	35	2D2
4	GND	20	2Q6	36	2D1
5	1Q3	21	GND	37	1D8
6	1Q4	22	2Q7	38	1D7
7	V _{CC}	23	2Q8	39	GND
8	1Q5	24	$\overline{2OE}$	40	1D6
9	1Q6	25	2LE	41	1D5
10	GND	26	2D8	42	V _{CC}
11	1Q7	27	2D7	43	1D4
12	1Q8	28	GND	44	1D3
13	2Q1	29	2D6	45	GND
14	2Q2	30	2D5	46	1D2
15	GND	31	V _{CC}	47	1D1
16	2Q3	32	2D4	48	1LE

FIGURE 2. Terminal connections.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 9

(Each 8-bit section)

Inputs			Output Q
\overline{OE}	LE	D	
L	H	H	H
L	H	L	L
L	L	X	Q ₀
H	X	X	Z

H = high level
 L = low level
 X = Irrelevant
 Z = High-impedance state
 Q₀ = Level of Q before the indicated steady-state input conditions were established.

FIGURE 3. Function table.


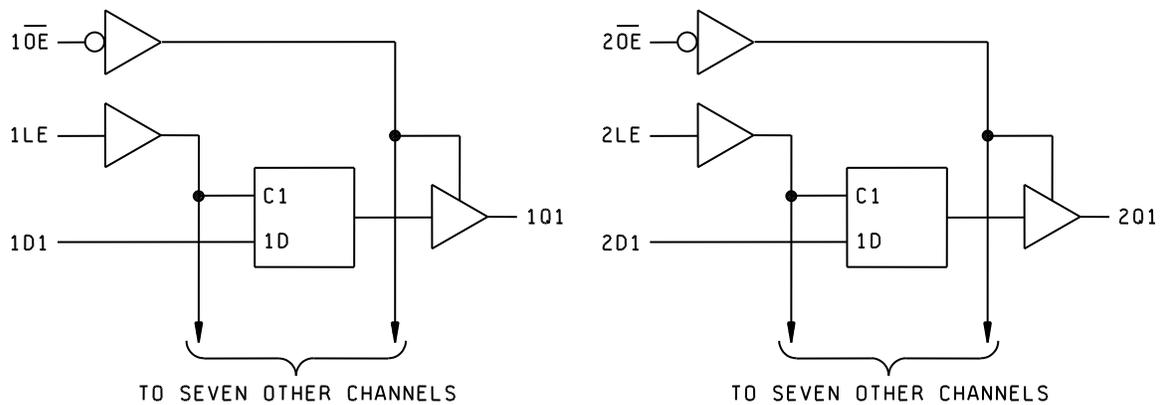


FIGURE 4. Logic diagram.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 10

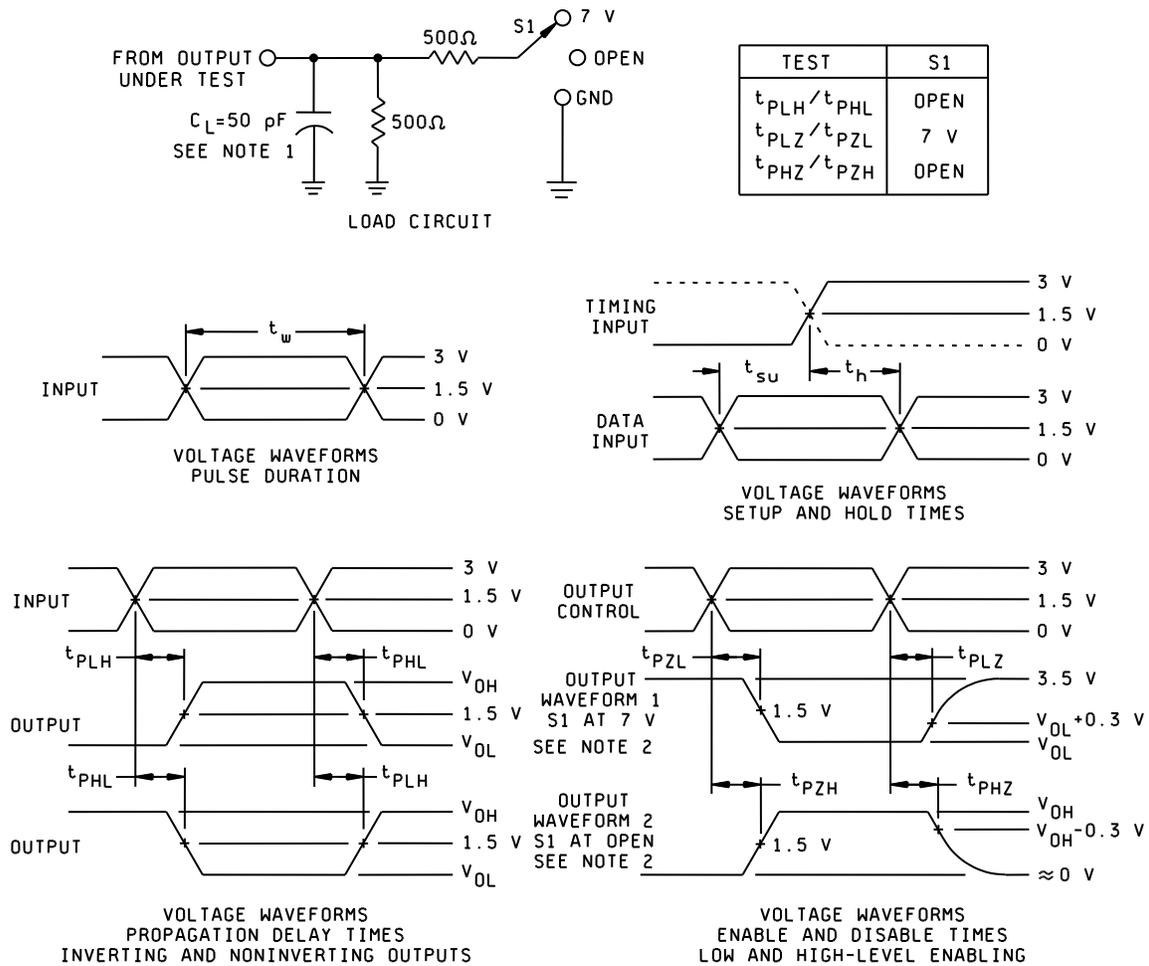

NOTES:

1. C_L includes probe and jig capacitance.
2. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.
Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
3. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10$ MHz, $Z_o = 50 \Omega$, $t_r \leq 2.5$ ns, $t_f \leq 2.5$ ns.
4. The outputs are measured one at a time, with one transition per measurement.

FIGURE 5. Timing waveforms and test circuit.

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 11

4. VERIFICATION

4.1 Product assurance requirements. The manufacturer is responsible for performing all inspection and test requirements as indicated in their internal documentation. Such procedures should include proper handling of electrostatic sensitive devices, classification, packaging, and labeling of moisture sensitive devices, as applicable.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Preservation, packaging, labeling, and marking shall be in accordance with the manufacturer's standard commercial practices for electrostatic discharge sensitive devices.

6. NOTES

6.1 ESDS. Devices are electrostatic discharge sensitive and are classified as ESDS class 1 minimum.

6.2 Configuration control. The data contained herein is based on the salient characteristics of the device manufacturer's data book. The device manufacturer reserves the right to make changes without notice. This drawing will be modified as changes are provided.

6.3 Suggested source(s) of supply. Identification of the suggested source(s) of supply herein is not to be construed as a guarantee of present or continued availability as a source of supply for the item. DLA Land and Maritime maintains an online database of all current sources of supply at <http://www.landandmaritime.dla.mil/Programs/Smcr/>.

Vendor item drawing administrative control number <u>1/</u>	Device manufacturer CAGE code	Package		Vendor part number	Top-side marking
V62/06628-01XE	01295	Small outline	Tape and reel	CABT16373AMDLREP	ABT16373AMEP

1/ The vendor item drawing establishes an administrative control number for identifying the item on the engineering documentation.

CAGE code

01295

Source of supply

Texas Instruments, Inc.
 Semiconductor Group
 8505 Forest Lane
 P.O. Box 660199
 Dallas, TX 75243
 Point of contact: U.S. Highway 75 South
 P.O. Box 84, M/S 853
 Sherman, TX 75090-9493

DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/06628
		REV A	PAGE 12