

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	Update document paragraphs to current requirements. - ro	21-07-22	J. ESCHMEYER



Prepared in accordance with ASME Y14.24

Vendor item drawing

REV																				
PAGE																				
REV																				
PAGE																				
REV STATUS OF PAGES	REV	A	A	A	A	A	A	A	A	A	A	A	A	A						
	PAGE	1	2	3	4	5	6	7	8	9	10	11								

PMIC N/A	PREPARED BY RICK OFFICER	DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 https://www.dla.mil/LandandMaritime
Original date of drawing YY-MM-DD 15-11-05	CHECKED BY RAJESH PITHADIA	TITLE MICROCIRCUIT, LINEAR, DUAL ULTRALOW DISTORTION, ULTRALOW NOISE OPERATIONAL AMPLIFIER, MONOLITHIC SILICON
	APPROVED BY CHARLES F. SAFFLE	
	SIZE A	CODE IDENT. NO. 16236
	REV A	PAGE 1 OF 11

1. SCOPE

1.1 Scope. This drawing documents the general requirements of a dual, ultralow distortion, ultralow noise operational amplifier microcircuit, with an operating temperature range of -55°C to +125°C.

1.2 Vendor Item Drawing Administrative Control Number. The manufacturer's PIN is the item of identification. The vendor item drawing establishes an administrative control number for identifying the item on the engineering documentation:

<u>V62/16604</u>	-	<u>01</u>	<u>X</u>	<u>E</u>
Drawing number		Device type (See 1.2.1)	Case outline (See 1.2.2)	Lead finish (See 1.2.3)

1.2.1 Device type(s).

<u>Device type</u>	<u>Generic</u>	<u>Circuit function</u>
01	AD8599-EP	Dual, ultralow distortion, ultralow noise operational amplifier

1.2.2 Case outline(s). The case outline(s) are as specified herein.

<u>Outline letter</u>	<u>Number of pins</u>	<u>JEDEC PUB 95</u>	<u>Package style</u>
X	8	MS-012-AA	Plastic small outline surface mount

1.2.3 Lead finishes. The lead finishes are as specified below or other lead finishes as provided by the device manufacturer:

<u>Finish designator</u>	<u>Material</u>
A	Hot solder dip
B	Tin-lead plate
C	Gold plate
D	Palladium
E	Gold flash palladium
F	Tin-lead alloy (BGA/CGA)
Z	Other

DLA LAND AND MARITIME COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/16604
		REV A	PAGE 2

1.3 Absolute maximum ratings. 1/

Supply voltage (VS)	±18 V
Input voltage (VIN)	-VS ≤ VIN ≤ +VS
Differential input voltage (VID)	±1 V 2/
Output short circuit to GND	Indefinite
Storage temperature range (TSTG)	-65°C to +150°C
Power dissipation (PD)	0.180 W
Lead temperature (soldering, 60 seconds)	+300°C
Junction temperature (TJ)	+150°C
Thermal resistance, junction to ambient (θJC)	36°C/W
Thermal resistance, junction to ambient (θJA)	120°C/W

1.4 Recommended operating conditions. 3/

Supply voltage range (VS)	±15 V
Operating free-air temperature range (TA)	-55°C to +125°C

1/ Stresses beyond those listed under “absolute maximum rating” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

2/ If the differential input voltage exceeds 1 V, limit the current to 5 mA.

3/ Use of this product beyond the manufacturers design rules or stated parameters is done at the user’s risk. The manufacturer and/or distributor maintain no responsibility or liability for product used beyond the stated limits.

DLA LAND AND MARITIME COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/16604
		REV A	PAGE 3

2. APPLICABLE DOCUMENTS

JEDEC Solid State Technology Association

JEDEC PUB 95 – Registered and Standard Outlines for Semiconductor Devices

(Copies of these documents are available online at <https://www.jedec.org>.)

3. REQUIREMENTS

3.1 Marking. Parts shall be permanently and legibly marked with the manufacturer's part number as shown in 6.3 herein and as follows:

- A. Manufacturer's name, CAGE code, or logo
- B. Pin 1 identifier
- C. ESDS identification (optional)

3.2 Unit container. The unit container shall be marked with the manufacturer's part number and with items A and C (if applicable) above.

3.3 Electrical characteristics. The maximum and recommended operating conditions and electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.4 Design, construction, and physical dimension. The design, construction, and physical dimensions are as specified herein.

3.5 Diagrams.

3.5.1 Case outline. The case outline shall be as shown in 1.2.2 and figure 1.

3.5.2 Terminal connections. The terminal connections shall be as shown in figure 2.

DLA LAND AND MARITIME COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/16604
		REV A	PAGE 4

TABLE I. Electrical performance characteristics. 1/

Test	Symbol	Conditions $V_S = \pm 15.0\text{ V}$, $V_{CM} = 0\text{ V}$ unless otherwise specified	Temperature, T_A	Device type	Limits		Unit
					Min	Max	
Input characteristics							
Offset voltage	VOS		+25°C	01		120	μV
					10 typical		
			-55°C to +125°C			300	
Offset voltage drift	$\Delta V_{OS} / \Delta T$		-55°C to +125°C	01		2.5	$\mu\text{V} / ^\circ\text{C}$
					0.8 typical		
Input bias current	IB		+25°C	01		200	nA
					25 typical		
			-55°C to +125°C			350	
Input offset current	IOS		+25°C	01		200	nA
					50 typical		
			-55°C to +125°C			350	
Input voltage range	VINR		+25°C	01	-12.5	+12.5	V
Common mode rejection ratio	CMRR	$V_{CM} = -12.5\text{ V} \leq V_{CM} \leq +12.5\text{ V}$	+25°C	01	120		dB
					135 typical		
			-55°C to +125°C		115		
Large signal voltage gain	AVO	$R_L \geq 600\ \Omega$, $V_O = -11\text{ V}$ to $+11\text{ V}$	+25°C	01	110		dB
					116 typical		
			-55°C to +125°C		106		

See footnote at end of table.

DLA LAND AND MARITIME COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/16604
		REV A	PAGE 5

TABLE I. Electrical performance characteristics – Continued. 1/

Test	Symbol	Conditions VS = ±15.0 V, VCM = 0 V unless otherwise specified	Temperature, TA	Device type	Limits		Unit
					Min	Max	
Input characteristics – continued.							
Input capacitance, common mode	CCM		+25°C	01	5.1 typical		pF
Input capacitance, differential mode	CDIFF		+25°C	01	12.1 typical		pF
Output characteristics.							
High output voltage	VOH	RL = 600 Ω	+25°C	01	13.1		V
					13.4 typical		
			-55°C to +125°C		12.8		
		RL = 2 kΩ	+25°C		13.5		
					13.7 typical		
			-55°C to +125°C		13.2		
Low output voltage	VOL	RL = 600 Ω	+25°C	01		-12.9	V
					-13.2 typical		
			-55°C to +125°C			-12.8	
		RL = 2 kΩ	+25°C			-13.4	
					-13.5 typical		
			-55°C to +125°C			-13.3	
Output short circuit current	ISC		+25°C	01	±52 typical		mA
Closed loop output impedance	ZOUT	At 1 MHz, AVO = 1	+25°C	01	5 typical		Ω
Power supply							
Power supply rejection ratio	PSRR	VS = ±18 V to ±4.5 V	+25°C	01	120		dB
					140 typical		
			-55°C to +125°C		118		
Supply current per amplifier	ISY		+25°C	01		5.7	mA
					5.0 typical		
			-55°C to +125°C			6.75	

See footnote at end of table.

DLA LAND AND MARITIME COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/16604
		REV A	PAGE 6

TABLE I. Electrical performance characteristics – Continued. 1/

Test	Symbol	Conditions VS = ±15.0 V, VCM = 0 V unless otherwise specified	Temperature, TA	Device type	Limits		Unit
					Min	Max	
Dynamic performance							
Slew rate	SR	AVO = -1, RL = 2 kΩ	+25°C	01	16 typical		V/μs
		AVO = 1, RL = 2 kΩ			15 typical		
Settling time	tS	To 0.01%, 10 V step	+25°C	01	2 typical		μs
Gain bandwidth product	GBP		+25°C	01	10 typical		MHz
Phase margin	ΦM		+25°C	01	65 typical		Degrees
Noise performance							
Peak to peak noise	en p-p	0.1 Hz to 10 Hz	+25°C	01	76 typical		nV p-p
Voltage noise density	en	f = 1 kHz	+25°C	01		1.15	nV / √Hz
					1.07 typical		
		f = 10 Hz				1.5	
Correlated current noise		f = 1 kHz	+25°C	01	1.9 typical		pA / √Hz
		f = 10 Hz			4.3 typical		
Uncorrelated current noise		f = 1 kHz	+25°C	01	2.3 typical		pA / √Hz
		f = 10 Hz			5.3 typical		
Total harmonic distortion + noise	THD+N	G = 1, RL ≥ 1 kΩ, f = 1 kHz, VRMS = 3 V	+25°C	01	-120 typical		dB
Channel separation	CS	f = 10 kHz	+25°C	01	-120 typical		dB

1/ Testing and other quality control techniques are used to the extent deemed necessary to assure product performance over the specified temperature range. Product may not necessarily be tested across the full temperature range and all parameters may not necessarily be tested. In the absence of specific parametric testing, product performance is assured by characterization and/or design.

DLA LAND AND MARITIME COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/16604
		REV A	PAGE 7

Case X

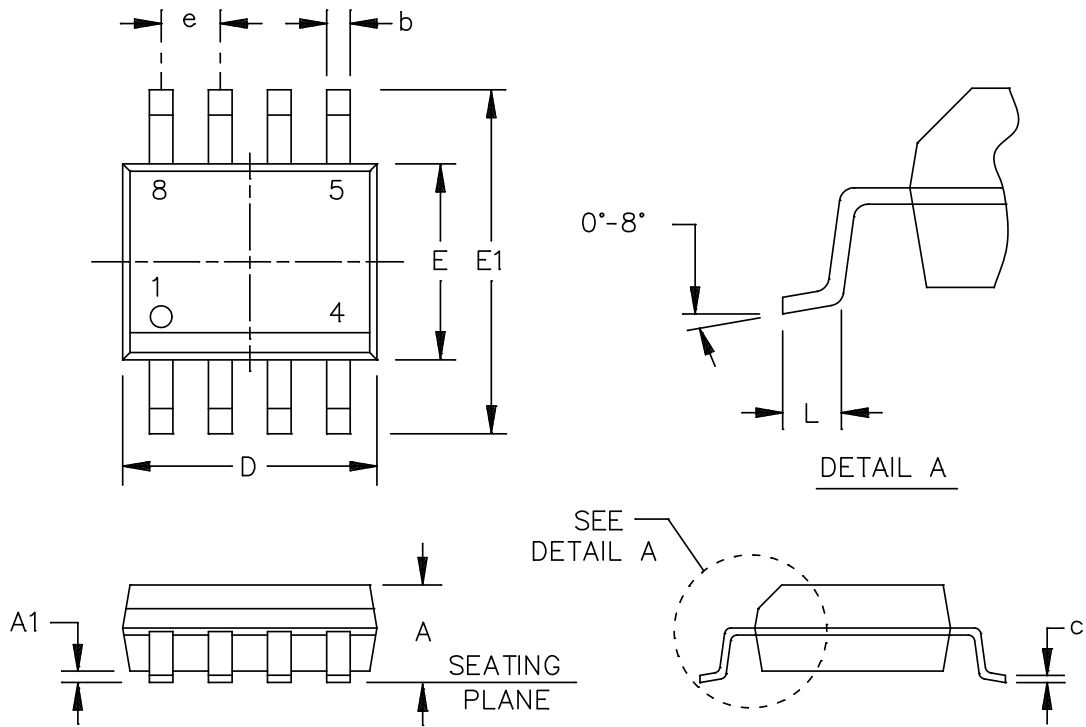


FIGURE 1. Case outline.

<p>DLA LAND AND MARITIME COLUMBUS, OHIO</p>	<p>SIZE A</p>	<p>CODE IDENT NO. 16236</p>	<p>DWG NO. V62/16604</p>
		<p>REV A</p>	<p>PAGE 8</p>

Case X – continued.

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.0122	.0201	0.31	0.51
c	.0067	.0098	0.17	0.25
D	.1890	.1968	4.80	5.00
e	.0500 BSC		1.27 BSC	
E	.1497	.1574	3.80	4.00
E1	.2284	.2441	5.80	6.20
L	.0157	.0500	0.40	1.27

NOTES:

1. Controlling dimensions are millimeter, inch dimensions are given for reference only.
2. Inch dimensions are rounded off millimeter equivalents for reference only and are not appropriate use in design.
3. Falls within reference to JEDEC MS-012-AA.

FIGURE 1. Case outline - Continued.

DLA LAND AND MARITIME COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/16604
		REV A	PAGE 9

Device type	01
Case outline	X
Terminal number	Terminal symbol
1	OUTPUT A
2	-INPUT A
3	+INPUT A
4	-Vs
5	+INPUT B
6	-INPUT B
7	OUTPUT B
8	+Vs

FIGURE 2. Terminal connections.

DLA LAND AND MARITIME COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/16604
		REV A	PAGE 10

4. VERIFICATION

4.1 Product assurance requirements. The manufacturer is responsible for performing all inspection and test requirements as indicated in their internal documentation. Such procedures should include proper handling of electrostatic sensitive devices, classification, packaging, and labeling of moisture sensitive devices, as applicable.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Preservation, packaging, labeling, and marking shall be in accordance with the manufacturer's standard commercial practices for electrostatic discharge sensitive devices.

6. NOTES

6.1 ESDS. Devices are electrostatic discharge sensitive and are classified as ESDS class 1 minimum.

6.2 Configuration control. The data contained herein is based on the salient characteristics of the device manufacturer's data book. The device manufacturer reserves the right to make changes without notice. This drawing will be modified as changes are provided.

6.3 Suggested source(s) of supply. Identification of the suggested source(s) of supply herein is not to be construed as a guarantee of present or continued availability as a source of supply for the item. DLA Land and Maritime maintains an online database of all current sources of supply at <https://landandmaritimeapps.dla.mil/programs/smcr/>.

Vendor item drawing administrative control number ^{1/}	Device manufacturer CAGE code	Mode of transportation and quantity	Vendor part number
V62/16604-01XE	24355	Tube, 98 units	AD8599TRZ-EP
V62/16604-01XE	24355	Reel, 1,000 units	AD8599TRZ-EP-R7

^{1/} The vendor item drawing establishes an administrative control number for identifying the item on the engineering documentation.

CAGE code

24355

Source of supply

Analog Devices
 Route 1 Industrial Park
 P.O. Box 9106
 Norwood, MA 02062
 Point of contact: 20 Alpha Road
 Chelmsford, MA 01824-4123

DLA LAND AND MARITIME COLUMBUS, OHIO	SIZE A	CODE IDENT NO. 16236	DWG NO. V62/16604
		REV A	PAGE 11