

**REVISIONS**

LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Technical editorial changes to Table I. Add footnotes to timing waveforms.	96-03-08	M. L. Poelking


REV																				
SHEET																				
REV	A	A	A	A	A	A	A	A	A	A	A	A								
SHEET	15	16	17	18	19	20	21	22	23	24	25	26								
REV STATUS OF SHEETS	REV			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
	SHEET			1	2	3	4	5	6	7	8	9	10	11	12	13	14			

<p align="center"><b>STANDARD MICROCIRCUIT DRAWING</b></p> <p>THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE</p> <p>AMSC N/A</p>	PHIC N/A	PREPARED BY Thomas M. Hess	DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444		
	CHECKED BY Thomas M. Hess	MICROCIRCUIT, DIGITAL, CMOS, STATIC 16-BIT MICROPROCESSOR, MONOLITHIC SILICON			
	APPROVED BY Monica L. Poelking				
	DRAWING APPROVAL DATE 95-12-28				
	REVISION LEVEL A				
SIZE A	CAGE CODE 67268	5962-96728			
SHEET 1	OF 26				

1. SCOPE

1.1 Scope. This drawing forms a part of a one part - one part number documentation system (see 6.6 herein). Two product assurance classes consisting of military high reliability (device classes Q and M) and space application (device class V), and a choice of case outlines and lead finishes are available and are reflected in the Part or Identifying Number (PIN). Device class M microcircuits represent non-JAN class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices". When available, a choice of Radiation Hardness Assurance (RHA) levels are reflected in the PIN.

1.2 PIN. The PIN shall be as shown in the following example:

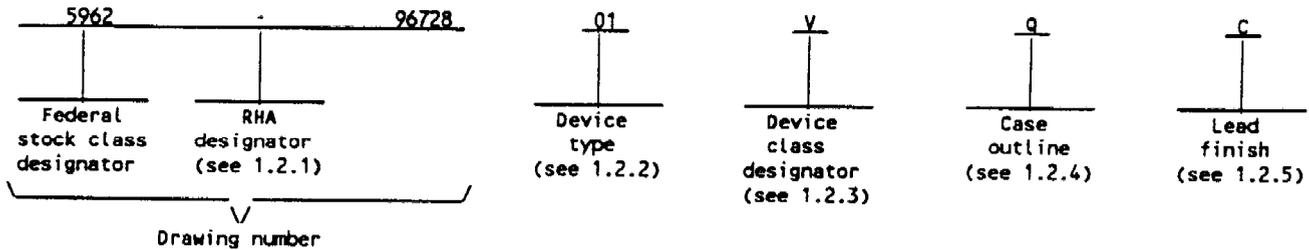

1.2.1 RHA designator. Device class M RHA marked devices shall meet the MIL-I-38535 appendix A specified RHA levels and shall be marked with the appropriate RHA designator. Device classes Q and V RHA marked devices shall meet the MIL-I-38535 specified RHA levels and shall be marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device type(s). The device type(s) shall identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	MD80C86/7	Latchup resistant CMOS static 16-Bit microprocessor

1.2.3 Device class designator. The device class designator shall be a single letter identifying the product assurance level as follows:

<u>Device class</u>	<u>Device requirements documentation</u>
M	Vendor self-certification to the requirements for non-JAN class B microcircuits in accordance with 1.2.1 of MIL-STD-883
Q or V	Certification and qualification to MIL-I-38535

1.2.4 Case outline(s). The case outline(s) shall be as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
Q	CDIP2-T40	40	Dual-in-line package

1.2.5 Lead finish. The lead finish shall be as specified in MIL-STD-883 (see 3.1 herein) for class M or MIL-I-38535 for classes Q and V. Finish letter "X" shall not be marked on the microcircuit or its packaging. The "X" designation is for use in specifications when lead finishes A, B, and C are considered acceptable and interchangeable without preference.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-96728
		REVISION LEVEL A	SHEET 2

1.3 Absolute maximum ratings. 1/

Supply voltage ( $V_{DD}$ )	+8.0 V dc
Input or output voltage range	GND-0.5 V dc to $V_{DD}$ +0.5 V dc
Storage temperature range ( $T_{STG}$ )	-65°C to +150°C
Junction temperature ( $T_J$ )	+175°C
Lead temperature (soldering 10 seconds) ( $T_S$ )	+300 °C
Thermal resistance junction-to-case ( $\theta_{JC}$ ):	
Case outline Q	4°C/W
Thermal resistance junction-to-ambient ( $\theta_{JA}$ ):	
Case outline Q	37°C/W
Maximum package power dissipation at $T_A = +125^\circ\text{C}$ ( $P_D$ ) 2/	1.35 W

1.4 Recommended operating conditions.

Operating supply voltage range ( $V_{DD}$ )	4.5 V dc to +5.5 V dc
Ambient operating temperature range ( $T_A$ )	-55°C to +125°C
Input low voltage range ( $V_{IL}$ )	0 V dc to +0.8 V dc
Input high voltage range (except clock pin)( $V_{IH}$ )	2.2 V dc to $V_{DD}$
Input high voltage range (clock pin) ( $V_{IH}$ )	$V_{DD} - 0.8$ V dc to $V_{DD}$

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, bulletin, and handbook. Unless otherwise specified, the following specification, standards, bulletin, and handbook of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

SPECIFICATION

MILITARY

MIL-I-38535 - Integrated Circuits, Manufacturing, General Specification for.

STANDARDS

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.  
 MIL-STD-973 - Configuration Management.  
 MIL-STD-1835 - Microcircuit Case Outlines.

BULLETIN

MILITARY

MIL-BUL-103 - List of Standardized Military Drawings (SMD's).

HANDBOOK

MILITARY

MIL-HDBK-780 - Standardized Military Drawings.

(Copies of the specification, standards, bulletin, and handbook required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

- 1/ Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.
- 2/ If device power exceeds package dissipation capability provide heat sinking or derate linearly (the derating is based on  $\theta_{JA}$ ) at a rate of 27.0 mW/°C.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-96728
		REVISION LEVEL A	SHEET 3

### 3. REQUIREMENTS

3.1 Item requirements. The individual item requirements for device class M shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices" and as specified herein. The individual item requirements for device classes Q and V shall be in accordance with MIL-I-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not effect the form, fit, or function as described herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-STD-883 (see 3.1 herein) for device class M and MIL-I-38535 for device classes Q and V and herein.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.2 herein.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.3 Block diagram. The block diagram shall be as specified on figure 2.

3.2.4 Switching waveforms. The switching waveforms shall be as specified in figure 3.

3.3 Electrical performance characteristics and postirradiation parameter limits. Unless otherwise specified herein, the electrical performance characteristics and postirradiation parameter limits are as specified in table I and shall apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table IIA. The electrical tests for each subgroup are defined in table I.

3.5 Marking. The part shall be marked with the PIN listed in 1.2 herein. Marking for device class M shall be in accordance with MIL-STD-883 (see 3.1 herein). In addition, the manufacturer's PIN may also be marked as listed in MIL-BUL-103. Marking for device classes Q and V shall be in accordance with MIL-I-38535.

3.5.1 Certification/compliance mark. The compliance mark for device class M shall be a "C" as required in MIL-STD-883 (see 3.1 herein). The certification mark for device classes Q and V shall be a "QML" or "Q" as required in MIL-I-38535.

3.6 Certificate of compliance. For device class M, a certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-BUL-103 (see 6.7.2 herein). For device classes Q and V, a certificate of compliance shall be required from a QML-38535 listed manufacturer in order to supply to the requirements of this drawing (see 6.7.1 herein). The certificate of compliance submitted to DESC-EC prior to listing as an approved source of supply for this drawing shall affirm that the manufacturer's product meets, for device class M, the requirements of MIL-STD-883 (see 3.1 herein), or for device classes Q and V, the requirements of MIL-I-38535 and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required for device class M in MIL-STD-883 (see 3.1 herein) or for device classes Q and V in MIL-I-38535 shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change for device class M. For device class M, notification to DESC-EC of change of product (see 6.2 herein) involving devices acquired to this drawing is required for any change as defined in MIL-STD-973.

3.9 Verification and review for device class M. For device class M, DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

3.10 Microcircuit group assignment for device class M. Device class M devices covered by this drawing shall be in microcircuit group number 105 (see MIL-I-38535, appendix A).

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-96728
		REVISION LEVEL A	SHEET 4

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions 1/ -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Logical "1" input voltage	V <sub>IH</sub>	2/ 3/ V <sub>DD</sub> = 5.5 V	1,2,3	ALL	2.2		V
Logical "0" input voltage	V <sub>IL</sub>	V <sub>DD</sub> = 4.5 V 2/ 3/	1,2,3	ALL		0.8	V
CLK logical "1" input voltage	V <sub>IHC</sub>	V <sub>DD</sub> = 5.5 V 2/ 3/	1,2,3	ALL	V <sub>DD</sub> -0.8		V
CLK logical "0" input voltage	V <sub>ILC</sub>	V <sub>DD</sub> = 4.5 V 2/ 3/	1,2,3	ALL		0.8	V
Output high voltage	V <sub>OH</sub>	V <sub>DD</sub> = 4.5 V, I <sub>OH</sub> = -2.5 mA 4/ V <sub>DD</sub> = 4.5 V, I <sub>OH</sub> = -100 μA 4/	1,2,3	ALL	3.0 V <sub>DD</sub> -0.4		V
Output low voltage	V <sub>OL</sub>	V <sub>DD</sub> = 4.5 V, I <sub>OL</sub> = +2.5 mA 4/	1,2,3	ALL		0.4	V
Input leakage current	I <sub>IL</sub> I <sub>IH</sub>	V <sub>DD</sub> = 5.5 V, V <sub>IN</sub> = GND or V <sub>DD</sub> pins: 17-19, 21-23, 33	1,2,3	ALL	-1.0	+1.0	μA
Output leakage current	I <sub>OZL</sub> I <sub>OZH</sub>	V <sub>DD</sub> = 5.5 V, V <sub>OUT</sub> = 0 V or V <sub>DD</sub> pins: 26-29, 32	1,2,3	ALL	-10	+10	μA
Input current bus hold high	I <sub>BHH</sub>	V <sub>IN</sub> = 3.0 V, V <sub>DD</sub> = 4.5 V and 5.5 V 5/	1,2,3	ALL	-400	-40	μA
Input current bus hold low	I <sub>BHL</sub>	V <sub>IN</sub> = 0.8 V, V <sub>DD</sub> = 4.5 V and 5.5 V 6/	1,2,3	ALL	40	400	μA
Standby power supply current	I <sub>CCSB</sub>	V <sub>IN</sub> = V <sub>DD</sub> or GND V <sub>DD</sub> = 5.5 V 7/	1,2,3	ALL		500	μA
Operating power supply current	I <sub>CCOP</sub>	V <sub>DD</sub> = 5.5 V, V <sub>IN</sub> = V <sub>DD</sub> or GND outputs open, f = 5 MHz	1,2,3	ALL		50	mA
Functional tests		See 4.4.1b V <sub>DD</sub> = 4.5 V and 5.5 V f = 5 MHz 8/ 2/	7,8	ALL			

See footnotes at end of table.

STANDARD  
MICROCIRCUIT DRAWING  
DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-96728

REVISION LEVEL  
A

SHEET  
5

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Input capacitance	C <sub>IN</sub>	See 4.4.1c f = 1 MHz All measurements are referenced to device GND.	4	ALL		25	pF
Output capacitance	C <sub>OUT</sub>		4	ALL		25	pF
I/O capacitance	C <sub>I/O</sub>		4	ALL		25	pF

MINIMUM COMPLEXITY SYSTEM TIMING

CLK cycle period	t <sub>CLCL</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	200		ns
CLK low time	t <sub>CLCH</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	118		ns
CLK high time	t <sub>CHCL</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	69		ns
Data in setup time	t <sub>DVCL</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	30		ns
Data in hold time	t <sub>CLDX1</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	10		ns
Ready setup time into device	t <sub>RYHCH</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	118		ns
Ready hold time into device	t <sub>CHRYX</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	30		ns
Ready inactive to CLK	t <sub>RYLCL</sub>	3/ 2/ 10/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	-8		ns
Hold setup time	t <sub>HVCH</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	35		ns
INTR, NMI, TEST setup time	t <sub>INVCH</sub>	3/ 2/ 11/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	30		ns
Address valid delay	t <sub>CLAV</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	10	110	ns
Address hold time	t <sub>CLAX</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	10		ns
ALE width	t <sub>LHLL</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	t <sub>CLCH</sub> - 20		ns
ALE active delay	t <sub>CLLH</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL		80	ns

See footnotes at end of table.

STANDARD  
MICROCIRCUIT DRAWING  
DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-96728

REVISION LEVEL  
A

SHEET  
6

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	

MINIMUM COMPLEXITY SYSTEM TIMING - CONTINUED.

ALE inactive delay	t <sub>CHLL</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All		85	ns
Address hold time to ALE inactive	t <sub>LLAX</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	t <sub>CHCL</sub> -10		ns
Data valid delay	t <sub>CLDV</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	10	110	ns
Control active delay 1	t <sub>CVCTV</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	10	110	ns
Control active delay 2	t <sub>CHCTV</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	10	110	ns
Control inactive delay	t <sub>CVCTX</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	10	110	ns
Address float to $\overline{RD}$ active	t <sub>AZRL</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	0		ns
$\overline{RD}$ active delay	t <sub>CLRL</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	10	165	ns
$\overline{RD}$ inactive delay	t <sub>CLRH</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	10	150	ns
$\overline{RD}$ inactive to next address active	t <sub>RHAV</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	t <sub>CLCL</sub> -45		ns
HLDA valid delay	t <sub>CLHAV</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	10	160	ns
$\overline{RD}$ width	t <sub>RLRH</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	2t <sub>CLCL</sub> -75		ns
$\overline{WR}$ width	t <sub>WLWH</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	2t <sub>CLCL</sub> -60		ns
Address valid to ALE low	t <sub>AVAL</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	t <sub>CLCH</sub> -60		ns
Output rise time	t <sub>OLOH</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	All		20	ns
Output fall time	t <sub>OHOL</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	All		20	ns

See footnotes at end of table.

STANDARD  
MICROCIRCUIT DRAWING  
DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-96728

REVISION LEVEL  
A

SHEET  
7

TABLE 1. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
MAXIMUM MODE SYSTEM TIMING (USING 82C88 BUS CONTROLLER)							
CLK cycle period	t <sub>CLCL</sub>	2/ V <sub>DD</sub> = 4.5 V 3/	9,10,11	All	200		ns
CLK low time	t <sub>CLCH</sub>	2/ V <sub>DD</sub> = 4.5 V 3/	9,10,11	All	118		ns
CLK high time	t <sub>CHCL</sub>	2/ V <sub>DD</sub> = 4.5 V 3/	9,10,11	All	69		ns
Data in setup time	t <sub>DVCL</sub>	2/ V <sub>DD</sub> = 4.5 V 3/	9,10,11	All	30		ns
Data in hold time	t <sub>CLDX1</sub>	2/ V <sub>DD</sub> = 4.5 V 3/	9,10,11	All	10		ns
Ready setup time into device	t <sub>RYHCH</sub>	2/ V <sub>DD</sub> = 4.5 V 3/	9,10,11	All	118		ns
Ready hold time into device	t <sub>CHRYX</sub>	2/ V <sub>DD</sub> = 4.5 V 3/	9,10,11	All	30		ns
Ready inactive to CLK	t <sub>RYLCL</sub>	2/ V <sub>DD</sub> = 4.5 V 3/	9,10,11	All	-8		ns
CLK rise time	t <sub>CH1CH2</sub>	From 1.0 V to 3.5 V 13/ V <sub>DD</sub> = 4.5 V	9,10,11	All		10	ns
CLK fall time	t <sub>CL2CL1</sub>	From 3.5 V to 1.0 V 13/ V <sub>DD</sub> = 4.5 V	9,10,11	All		10	ns
RDY setup time into 82C84A	t <sub>R1VCL</sub>	C <sub>L</sub> = 100 pF, V <sub>DD</sub> = V <sub>DPL</sub> , f = 1 MHz, V <sub>DD</sub> = 4.5 V, 14/ 13/ 15/	9,10,11	All	35		ns
RDY hold time into 82C84A	t <sub>CLR1X</sub>	C <sub>L</sub> = 100 pF, V <sub>DD</sub> = V <sub>DPL</sub> , f = 1 MHz, V <sub>DD</sub> = 4.5 V, 13/14/ 15/	9,10,11	All	0		ns
Input rise time (except CLK)	t <sub>ILIH</sub>	From 0.8 V to 2.0 V V <sub>DD</sub> = 4.5 V 13/	9,10,11	All		15	ns
Input fall time (except CLK)	t <sub>IHIL</sub>	From 2.0 V to 0.8 V V <sub>DD</sub> = 4.5 V 13/	9,10,11	All		15	ns

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-96728
		REVISION LEVEL A	SHEET 8

TABLE 1. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	

MINIMUM COMPLEXITY SYSTEM TIMING

Address float delay	t <sub>CLAZ</sub>	C <sub>L</sub> = 100 pF, V <sub>DD</sub> = V <sub>DPL</sub> , f = 1 MHz V <sub>DD</sub> = 4.5 V 9/ 13/	9,10,11	ALL	t <sub>CLAX</sub>	80	ns
Status float delay	t <sub>CHSZ</sub>		9,10,11	ALL		80	ns
Data hold time after WR	t <sub>WHDX</sub>		9,10,11	ALL	t <sub>CLCL</sub> -30		ns
Data hold time	t <sub>CLDX2</sub>		9,10,11	ALL	10		ns

MAXIMUM MODE SYSTEM TIMING (USING 82C88 BUS CONTROLLER)

Setup time for recognition (INTR, NMI, Test)	t <sub>INVCH</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	30		ns
RQ/GT setup delay	t <sub>GVCH</sub>	3/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	30		ns
RQ hold time into device	t <sub>CHGX</sub>	3/ 10/ 12/ 16/ 2/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	40	t <sub>CHCL</sub> +10	ns
Ready active to status passive	t <sub>RYHSH</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL		110	ns
Status active delay	t <sub>CHSV</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	10	110	ns
Status inactive delay	t <sub>CLSH</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	10	130	ns
Address valid delay	t <sub>CLAV</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	10	110	ns
Address hold time	t <sub>CLAX</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	10		ns
Data valid delay	t <sub>CLDV</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	10	110	ns
Address float to read active	t <sub>AZRL</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	0		ns
RD active delay	t <sub>CLRL</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	ALL	10	165	ns

See footnotes at end of table.

STANDARD  
MICROCIRCUIT DRAWING  
DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-96728

REVISION LEVEL  
A

SHEET  
9

TABLE 1. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	

MAXIMUM MODE SYSTEM TIMING (USING 82C88 BUS CONTROLLER) - CONTINUED.

$\overline{\text{RD}}$ inactive delay	t <sub>CLR<sub>H</sub></sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	10	150	ns
$\overline{\text{RD}}$ inactive to next address	t <sub>RHAV</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	t <sub>CLCL</sub> -45		ns
$\overline{\text{GT}}$ active delay	t <sub>CLGL</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	10	85	ns
$\overline{\text{GT}}$ inactive delay	t <sub>CLGH</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	10	85	ns
$\overline{\text{RD}}$ width	t <sub>RLRH</sub>	3/ 2/ 12/ V <sub>DD</sub> = 4.5 V	9,10,11	All	2t <sub>CLCL</sub> -75		ns
Output rise time	t <sub>OLOH</sub>	from 0.8 V to 2.0 V 2/ V <sub>DD</sub> = 4.5 V	9,10,11	All		20	ns
Output fall time	t <sub>OHOL</sub>	from 2.0 V to 0.8 V 2/ V <sub>DD</sub> = 4.5 V	9,10,11	All		20	ns

MINIMUM COMPLEXITY SYSTEM TIMING

CLK rise time	t <sub>CH1CH2</sub>	From 1.0 V to 3.5 V 13/ V <sub>DD</sub> = 4.5 V	9,10,11	All		10	ns
CLK fall time	t <sub>CL2CL1</sub>	From 3.5 V to 1.0 V 13/ V <sub>DD</sub> = 4.5 V	9,10,11	All		10	ns
RDY setup time into 82C84A	t <sub>R1VCL</sub>	C <sub>L</sub> = 100 pF, V <sub>DD</sub> = V <sub>DDL</sub> , f = 1 MHz, V <sub>DD</sub> = 4.5 V, 14/ 13/ 15/	9,10,11	All	35		ns
RDY hold time into 82C84A	t <sub>CLR1X</sub>	C <sub>L</sub> = 100 pF, V <sub>DD</sub> = V <sub>DDL</sub> , f = 1 MHz, V <sub>DD</sub> = 4.5 V, 13/14/ 15/	9,10,11	All	0		ns
Input rise time (except CLK)	t <sub>ILIH</sub>	From 0.8 V to 2.0 V V <sub>DD</sub> = 4.5 V 13/	9,10,11	All		15	ns
Input fall time (except CLK)	t <sub>IHLI</sub>	From 2.0 V to 0.8 V V <sub>DD</sub> = 4.5 V 13/	9,10,11	All		15	ns

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-96728
		REVISION LEVEL A	SHEET 10

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C < T <sub>A</sub> < +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
MAXIMUM MODE SYSTEM TIMING (USING 82C88 BUS CONTROLLER)							
Command active delay 15/	t <sub>CLML</sub>	C <sub>L</sub> = 100 pF, f = 1 MHz, V <sub>DD</sub> = 4.5 V 13/	9,10,11	ALL	5	35	ns
Command inactive delay 15/	t <sub>CLMH</sub>		9,10,11	ALL	5	35	ns
Address float delay	t <sub>CLAZ</sub>		9,10,11	ALL	t <sub>CLAX</sub>	80	ns
Status float delay	t <sub>CHSZ</sub>		9,10,11	ALL		80	ns
Status valid to ALE high 15/	t <sub>SVLH</sub>		9,10,11	ALL		20	ns
Status valid to MCE high 15/	t <sub>SVMCH</sub>		9,10,11	ALL		30	ns
CLK low to ALE high valid 15/	t <sub>CLLH</sub>		9,10,11	ALL		20	ns
ALE inactive delay 15/	t <sub>CHLL</sub>	9,10,11	ALL	4	18	ns	
15/ CLK low to MCE high	t <sub>CLMCH</sub>	13/	9,10,11	ALL		25	ns
MCE inactive delay 15/	t <sub>CLMCL</sub>	f = 1 MHz V <sub>DD</sub> = 4.5 V C <sub>L</sub> = 100 pF,	9,10,11	ALL		15	ns
Data hold time	t <sub>CLDX2</sub>		9,10,11	ALL	10		ns
Control active delay	t <sub>CVNV</sub>		9,10,11	ALL	5	45	ns
Control inactive delay	t <sub>CVNX</sub>		9,10,11	ALL	10	45	ns
Direct control active delay	t <sub>CHDTL</sub>		9,10,11	ALL		50	ns
Direct control inactive delay	t <sub>CHDTH</sub>		9,10,11	ALL		30	ns

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-96728
		REVISION LEVEL A	SHEET 11

TABLE I. Electrical performance characteristics - Continued.

- 1/ Unless otherwise specified, all testing to be performed using worst-case conditions.
- 2/ Min/Max is a strap option and should be held to  $V_{DD}$  or GND.
- 3/ Verified on GO-NO GO test.
- 4/ Interchanging of force and sense conditions is permitted.
- 5/  $I_{BHH}$  should be measured after raising  $V_{IN}$  to  $V_{DD}$  and then lowering to valid input high level of 3.0 V on the following pins; 2-16, 26-32, 34-39.
- 6/  $I_{BHL}$  should be measured after lowering  $V_{IN}$  to GND and then raising to valid input low level of 0.8V on the following: pins 2-16, 34-39.
- 7/  $I_{DDSB}$  tested during clock high time after HALT instruction execution.
- 8/  $V_{IL} = 0.4$  V,  $V_{IH} = 2.6$  V,  $V_{ILC} = 0.4$  V,  $V_{ICH} = V_{DD} - 0.4$  V,  $V_{OL} \leq 1.5$  V,  $V_{OH} \geq 1.5$  V.
- 9/  $V_{DD} = 4.5$  V,  $f = 1$  MHz,  $V_{IL} = 0.4$  V,  $V_{IH} = 2.6$  V,  $V_{ILC} = 0.4$  V,  $V_{IHC} = V_{DD} - 0.4$  V,  $V_{OL} \leq 1.5$  V,  $V_{OH} \geq 1.5$  V.
- 10/ Applies only to T2 state (8 ns into T3).
- 11/ Setup requirement for asynchronous signal to guarantee recognition at next clock.
- 12/ Load capacitance  $C_L = 100$  pF.
- 13/ This parameter is guaranteed but not tested. This parameter is characterized upon initial design or process changes which affect this characteristic.
- 14/ Setup requirement for asynchronous signal only to guarantee recognition at next clock.
- 15/ Signal at 82C84A or 82C88 shown for reference only.
- 16/ Status lines return to their inactive (logic one) state after CLK goes low and READY goes high.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-96728
		REVISION LEVEL A	SHEET 12

Device type	01		
Case outline	Q		
Terminal number	Terminal symbol	Terminal number	Terminal symbol
1	GND	21	RESET
2	AD14	22	READY
3	AD13	23	TEST
4	AD12	24	QS1 (INTA)
5	AD11	25	QS0 (ALE)
6	AD10	26	S0 (DEN)
7	AD9	27	S1 (DT/R)
8	AD8	28	S2 (M/IO)
9	AD7	29	LOCK (WR)
10	AD6	30	RQ/GT1 (HLDA)
11	AD5	31	RQ/GT0 (HOLD)
12	AD4	32	RD
13	AD3	33	MN/MX
14	AD2	34	BHE/S7
15	AD1	35	A19/S6
16	AD0	36	A18/S5
17	NMI	37	A17/S4
18	INTR	38	AD16/S3
19	CLK	39	AD15
20	GND	40	V <sub>DD</sub>

FIGURE 1. Terminal connection.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-96728
		REVISION LEVEL A	SHEET 13

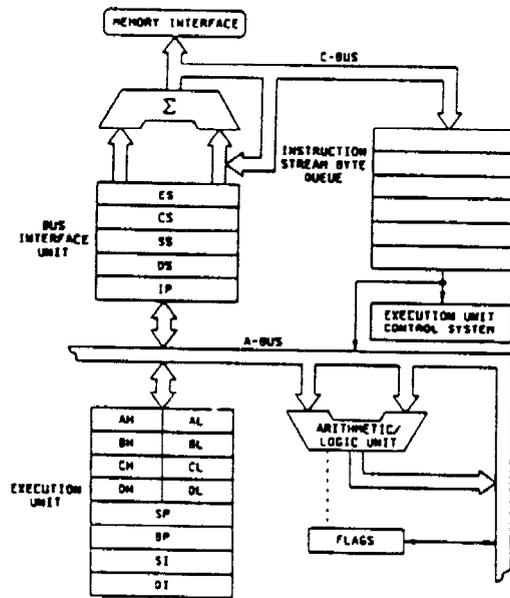
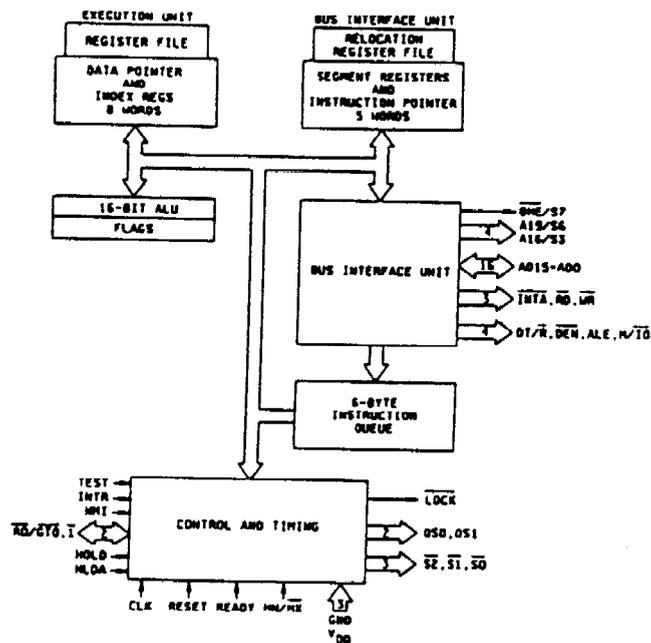


FIGURE 2. Functional diagram.




STANDARD  
MICROCIRCUIT DRAWING  
DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-96728

REVISION LEVEL  
A

SHEET  
14

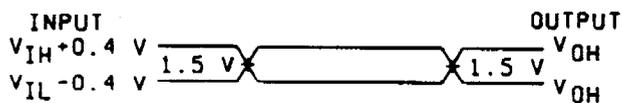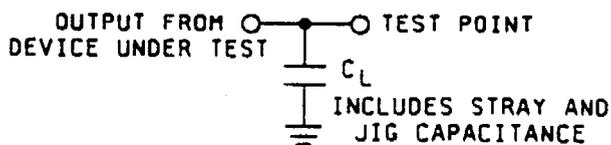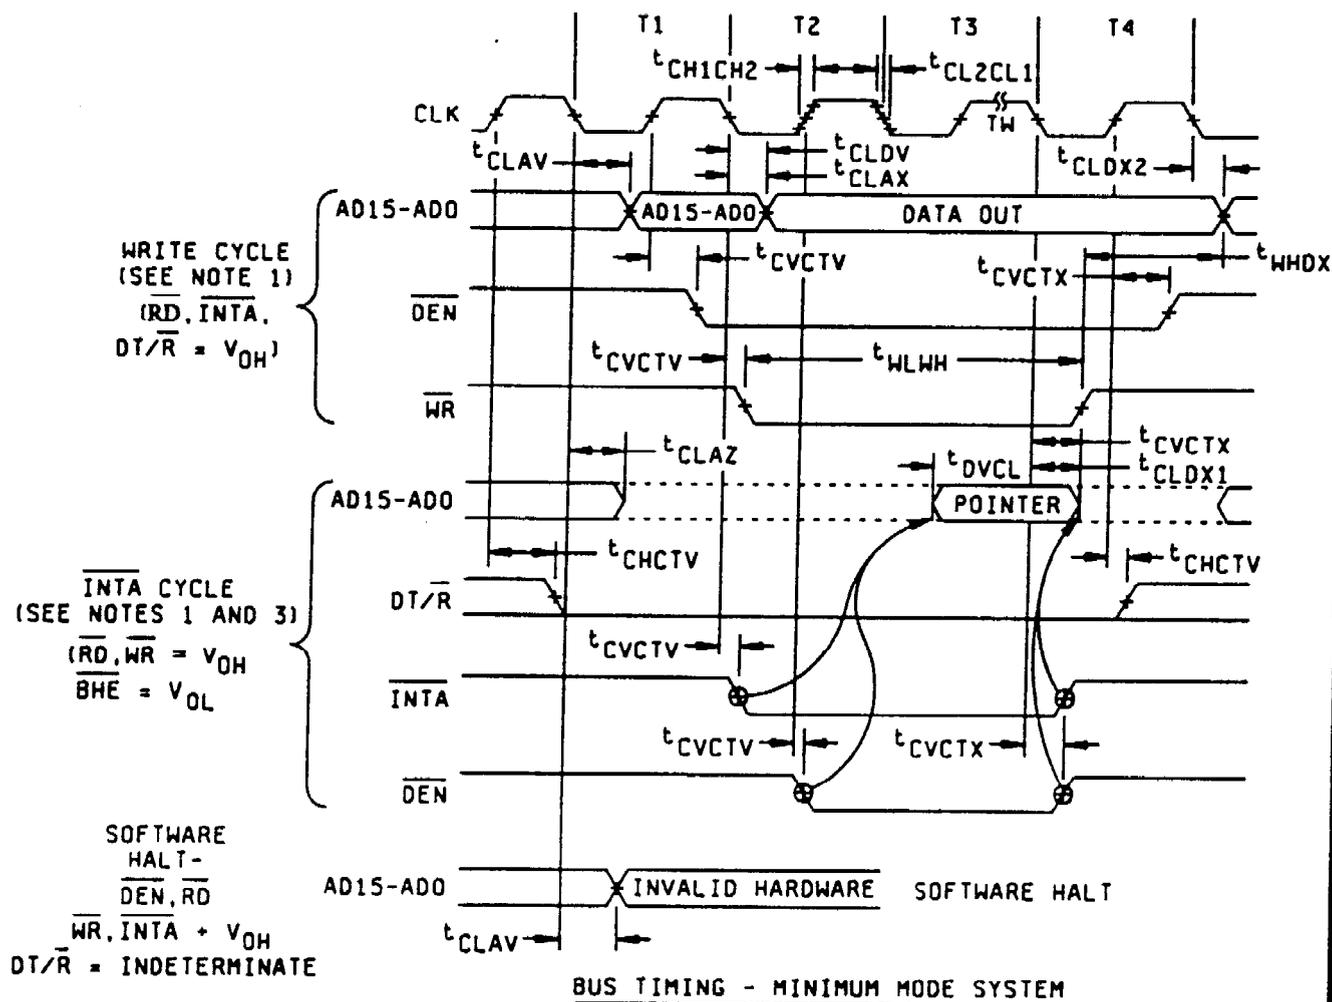

**Note:**

1. All signals switch between  $V_{OH}$  and  $V_{OL}$  unless otherwise specified.
2. RDY is sampled near the end of T2, T3, TW to determine if TW machines states are to be inserted.
3. Two INTA cycles run back-to-back. The M080C86 local ADDR/DATA bus is inactive during both INTA cycles. Control signals are shown for the second INTA cycle.
4. Signals at M082C85 are shown for reference only.
5. All timing measurements are made at 1.5 V unless otherwise specified.
6. The Coprocessor may not drive the busses outside the region shown without risking contention.
7. All input signals (other than CLK) must switch between  $V_{IL\text{Max}} - 0.4 V$  and  $V_{IH\text{Min}} + 0.4 V$ . CLK must switch between 0.4 V and 3.9 V.  $t_r$  and  $t_f$  must be less than or equal to 15 ns. CLK  $t_r$  and  $t_f$  must be less than or equal to 10 ns.
8. Cascade address is valid between first and second INTA cycle.

Figure 3. Timing waveform and load circuit.

STANDARD  
 MICROCIRCUIT DRAWING  
 DEFENSE ELECTRONICS SUPPLY CENTER  
 DAYTON, OHIO 45444


SIZE  
 A

5962-96728

REVISION LEVEL  
 A

SHEET  
 15



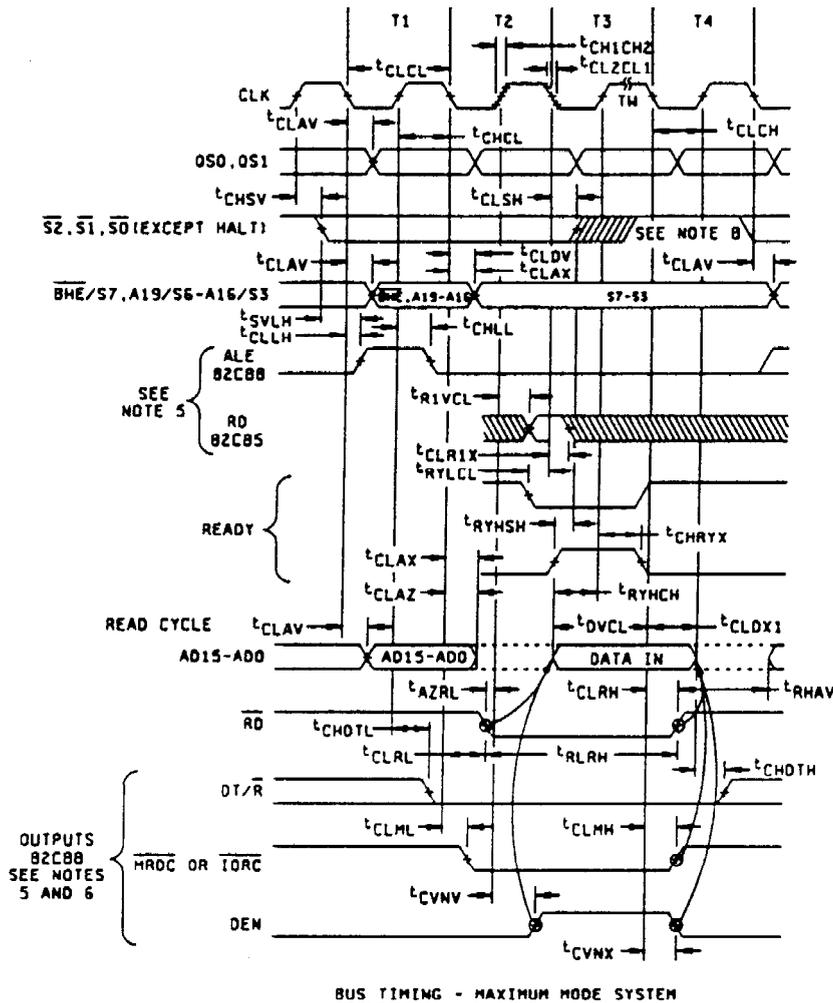


**NOTES:**

1. Unless otherwise specified, all signals switch between  $V_{OH}$  and  $V_{OL}$ .
2. RDY is sampled near the end of T2, T3, TW to determine if TW machines states are to be inserted.
3. Cascade address is valid between first and second INTA cycle.
4. Two INTA cycles run back-to-back. The device local ADDR/DATA bus is inactive during both INTA cycles. Control for pointer address is shown for the second INTA cycle.
5. Signals at device at 82C85 and 82C88 are shown for reference only.
6. The issuance of the device command and control signals (MRDC MWTC, ANWC, IOAC, IOWC, AIOWC, INTA and DEN) lags the active high of M082C88 CEN.
7. Unless otherwise specified, all timing measurements are made at 1.5 V.
8. Status inactive in state just prior to T4.

FIGURE 3. Timing waveform and load circuit - Continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		<b>5962-96728</b>
		REVISION LEVEL A	SHEET 17

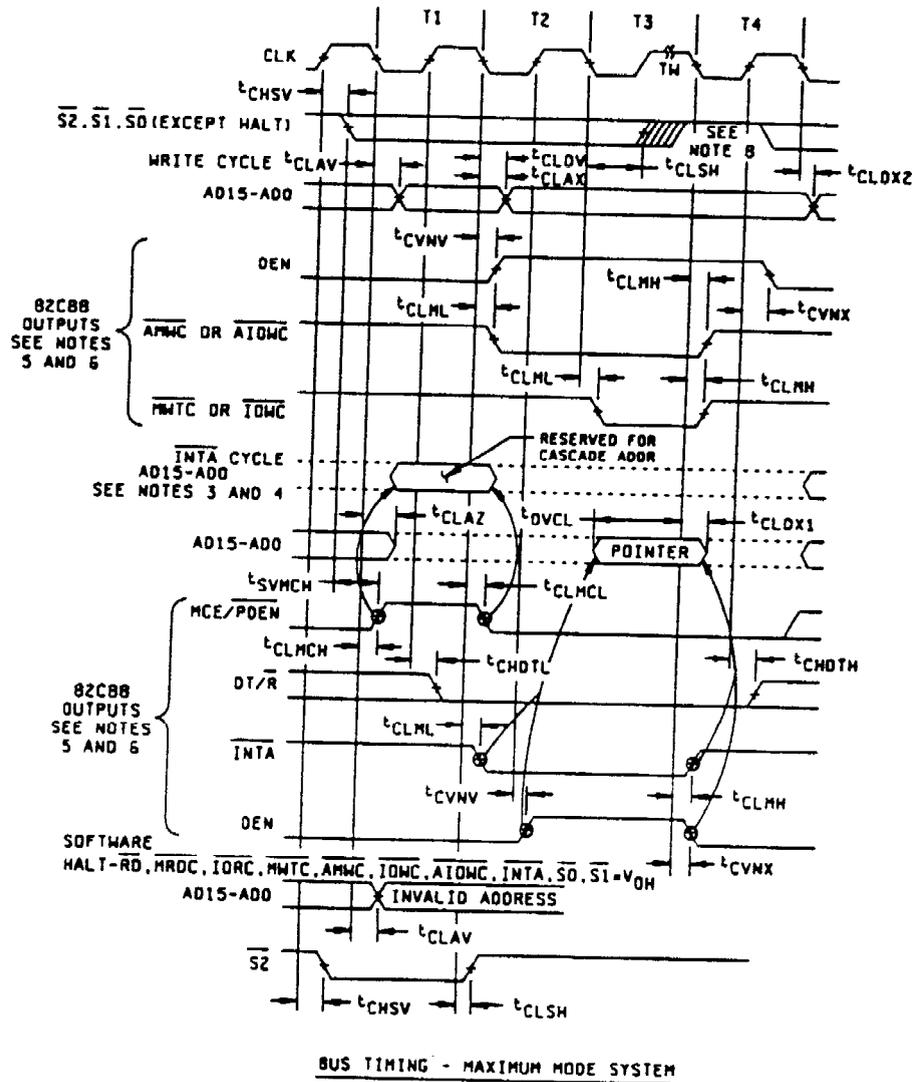

**NOTES:**

1. Unless otherwise specified, all signals switch between  $V_{OH}$  and  $V_{OL}$ .
2. RDY is sampled near the end of T2, T3, TW to determine if TW machines states are to be inserted.
3. Cascade address is valid between first and second INTA cycle.
4. Two INTA cycles run back-to-back. The device local ADDR/DATA bus is inactive during both INTA cycles. Control for the pointer address is shown for the second INTA cycle.
5. Signals for devices 82C85 and 82C88 are shown for reference only.
6. The issuance of the 82C88 command and control signals (MRDC, MWTC, AMWC, IORC, IOWC, A10WC, INTA and DEN) lags the active high 82C88 CEN.
7. Unless otherwise specified, all timing measurements are made at 1.5 V.
8. Status inactive in state just prior to T4.

FIGURE 3. Timing waveform and load circuit - Continued.


STANDARD  
MICROCIRCUIT DRAWING  
DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
**A**

5962-96728

REVISION LEVEL  
A

SHEET  
18

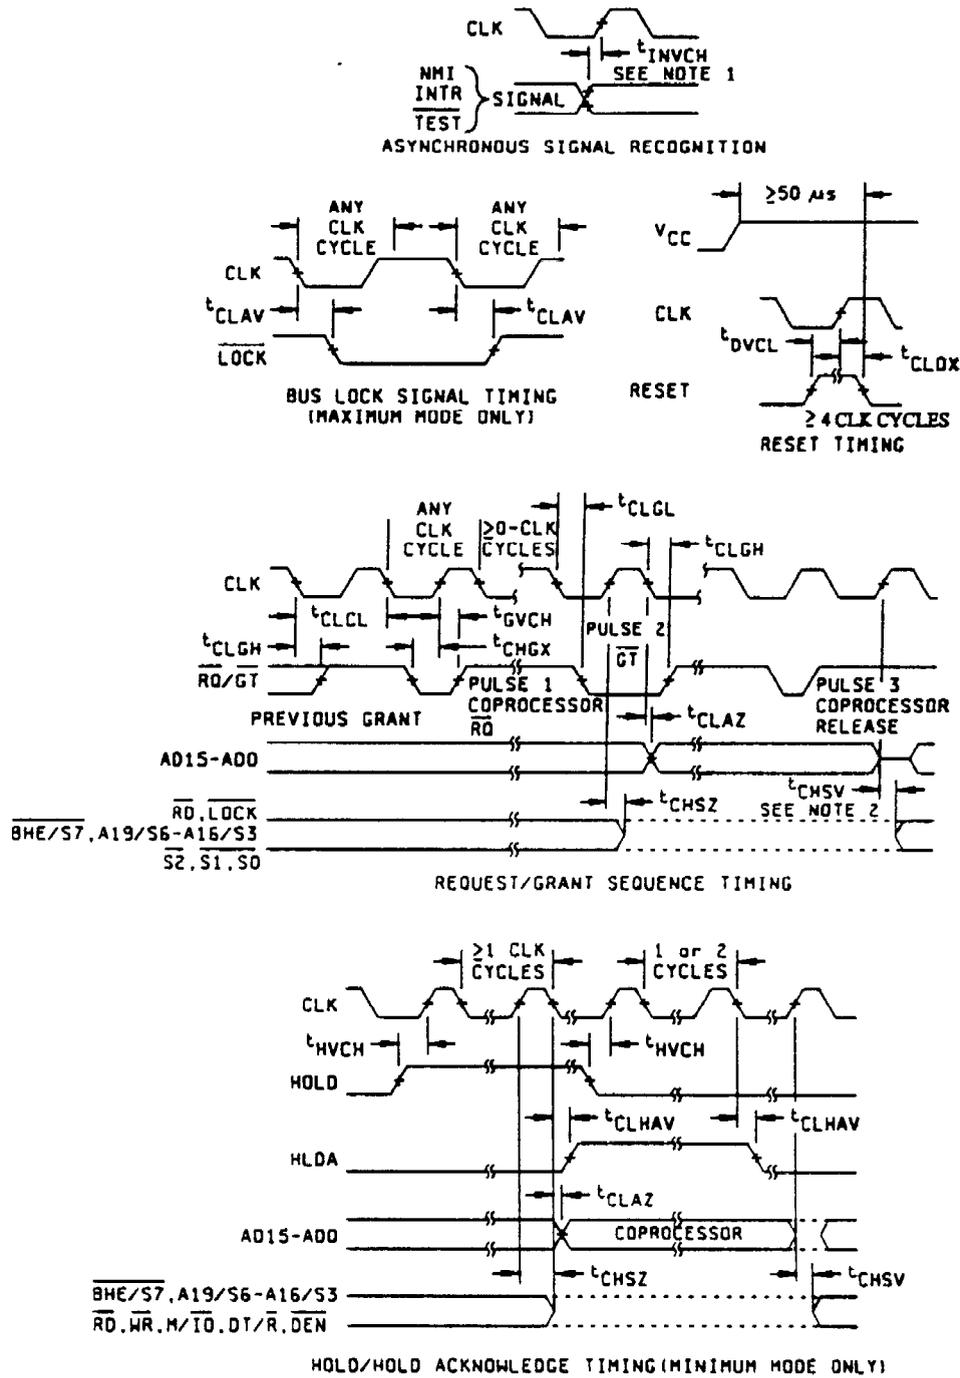

Note:

1. Setup requirement for asynchronous signal only to guarantee recognition at next clock.
2. The coprocessor may not drive the buses outside the region shown without risking contention.

FIGURE 3. Timing waveform and load circuit - Continued.

STANDARD  
MICROCIRCUIT DRAWING  
DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-96728

REVISION LEVEL  
A

SHEET  
19

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. For device class M, sampling and inspection procedures shall be in accordance with MIL-STD-883 (see 3.1 herein). For device classes Q and V, sampling and inspection procedures shall be in accordance with MIL-I-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not effect the form, fit, or function as described herein.

4.2 Screening. For device class M, screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. For device classes Q and V, screening shall be in accordance with MIL-I-38535, and shall be conducted on all devices prior to qualification and technology conformance inspection.

4.2.1 Additional criteria for device class M.

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015.

(2)  $T_A = +125^{\circ}\text{C}$ , minimum.

b. Interim and final electrical test parameters shall be as specified in table IIA herein.

4.2.2 Additional criteria for device classes Q and V.

a. The burn-in test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-I-38535. The burn-in test circuit shall be maintained under document revision level control of the device manufacturer's Technology Review Board (TRB) in accordance with MIL-I-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015.

b. Interim and final electrical test parameters shall be as specified in table IIA herein.

c. Additional screening for device class V beyond the requirements of device class Q shall be as specified in appendix B of MIL-I-38535, or as modified in the device manufacturers approved Quality Management (QM) plan.

4.3 Qualification inspection for device classes Q and V. Qualification inspection for device classes Q and V shall be in accordance with MIL-I-38535. Inspections to be performed shall be those specified in MIL-I-38535 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4 Conformance inspection. Quality conformance inspection for device class M shall be in accordance with MIL-STD-883 (see 3.1 herein) and as specified herein. Inspections to be performed for device class M shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4). Technology conformance inspection for classes Q and V shall be in accordance with MIL-I-38535 or as modified in the device manufacturers QM plan including groups A, B, C, D, and E inspections and as specified herein except where option 2 of MIL-I-38535 permits alternate in-line control testing.

4.4.1 Group A inspection.

a. Tests shall be as specified in table IIA herein.

b. For device class M, subgroups 7 and 8 tests shall be sufficient to verify the truth table. For device classes Q and V, subgroups 7 and 8 shall include verifying the functionality of the device.

c. Subgroup 4 ( $C_{IN}$ ,  $C_{OUT}$ , and  $C_{I/O}$  measurements) shall be measured only for the initial qualification and after process or design changes which may affect capacitance. A minimum sample size of 5 devices with zero rejects shall be required.

4.4.2 Group C inspection. The group C inspection end-point electrical parameters shall be as specified in table II herein.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-96728
		REVISION LEVEL A	SHEET 20

TABLE IIA. Electrical test requirements.

Test requirements	Subgroups (in accordance with MIL-STD-883, TM 5005, table 1)	Subgroups (in accordance with MIL-I-38535, table III)	
	Device class M	Device class Q	Device class V
Interim electrical parameters (see 4.2)	1,7,9	1,7,9	1,7,9
Final electrical parameters (see 4.2)	1,2,3,7,8,9, 1/ 10,11	1,2,3,7,8, 1/ 9,10,11	1,2,3,7,8 2/ 9,10,11 3/
Group A test requirements (see 4.4)	1,2,3,4,7,8,9,10,11	1,2,3,4,7,8 9,10,11	1,2,3,4,7,8 9,10,11
Group C end-point electrical parameters (see 4.4)	1,2,3,7,8,9 10,11	1,2,3,7,8,9 10,11	1,2,3,7,8,9 10,11 3/
Group D end-point electrical parameters (see 4.4)	1,7,9	1,7,9	1,7,9
Group E end-point electrical parameters (see 4.4)	1,7,9	1,7,9	1,7,9

1/ PDA applies to subgroup 1 and 7.

2/ PDA applies to subgroups 1,7 and deltas.

3/ Delta limits as specified in Tabel IIB herein shall be required when specified and the delta values shall be completed with reference to the zero hour electrical parameters.

TABLE IIB. Burn-in delta parameters (+25°).

Parameter	Symbol	Delta limits
Standby power supply current	$I_{CCSB}$	$\pm 100 \mu A$
Output leakage current	$I_{OZL}, I_{OZH}$	$\pm 2 \mu A$
Input leakage current	$I_{IH}, I_{IL}$	$\pm 200 \mu A$

4.4.2.1 Additional criteria for device class M. Steady-state life test conditions, method 1005 of MIL-STD-883:

- a. Test condition A, B, C or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005.
- b.  $T_A = +125^\circ C$ , minimum.
- c. Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.4.2.2 Additional criteria for device classes Q and V. The steady-state life test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-I-38535. The test circuit shall be maintained under document revision level control by the device manufacturer's TRB, in accordance with MIL-I-38535, and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-96728
		REVISION LEVEL A	SHEET 21

4.4.3 Group D inspection. The group D inspection end-point electrical parameters shall be as specified in table IIA herein.

4.4.4 Group E inspection. Group E inspection is required only for parts intended to be marked as radiation hardness assured (see 3.5 herein). RHA levels for device classes Q and V shall be M, D, L, R, F, G, and H and for device class M shall be M and D.

- a. End-point electrical parameters shall be as specified in table IIA herein.
- b. For device class M, the devices shall be subjected to radiation hardness assured tests as specified in MIL-I-38535, appendix A, for the RHA level being tested. For device classes Q and V, the devices or test vehicle shall be subjected to radiation hardness assured tests as specified in MIL-I-38535 for the RHA level being tested. All device classes must meet the postirradiation end-point electrical parameter limits as defined in table I at  $T_A = +25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , after exposure, to the subgroups specified in table IIA herein.
- c. When specified in the purchase order or contract, a copy of the RHA delta limits shall be supplied.

4.5 Methods of inspection. Methods of inspection shall be specified as follows:

4.5.1 Voltage and current. Unless otherwise specified, all voltages given are referenced to the microcircuit  $V_{SS}$  terminal. Currents given are conventional current and positive when flowing into the referenced terminal.

## 5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-STD-883 (see 3.1 herein) for device class M and MIL-I-38535 for device classes Q and V.

## 6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.1.1 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.1.2 Substitutability. Device class Q devices will replace device class M devices.

6.2 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-973 using DD Form 1692, Engineering Change Proposal.

6.3 Record of users. Military and industrial users shall inform Defense Electronics Supply Center when a system application requires configuration control and which SMD's are applicable to that system. DESC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DESC-EC, telephone (513) 296-6047.

6.4 Comments. Comments on this drawing should be directed to DESC-EC, Dayton, Ohio 45444-5270, or telephone (513) 296-5377.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-I-38535 and MIL-STD-1331 and as follows:

Pin symbol	Type	Description
A015-A00	I/O	ADDRESS DATA BUS: These lines constitute the time multiplexed memory/I/O address (T1) and data (T2, T3, T4) bus. A0 is analogous to BHE for the lower byte of the data bus, pins D7-D0. It is LOW during T1 when a byte is to be transferred on the lower portion of the bus in memory or I/O operations. Eight bit oriented devices tied to the lower half would normally use A0 to condition chip select functions (see BHE). These lines are active HIGH and are held at high impedance to the last valid logic level during interrupt acknowledge and local bus "hold acknowledge" or "grant sequence".
A19/S6 A18/S5 A17/S4 A16/S3	0	ADDRESS/STATUS: During T1, these are the four most significant address lines for memory operations. During I/O operations these lines are low. During memory and I/O operations, status information is available on these lines during T2, T3, T4, S6 is always zero. The status of the interrupt enable. FLAG bit (S5) is updated at the beginning of each clock cycle. S4 and S3 are encoded as shown.

STANDARD  
MICROCIRCUIT DRAWING  
DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-96728

REVISION LEVEL  
A

SHEET  
22

Pin symbol      Type      Description - Continued.  
 This information indicates which segment register is presently being used for data accessing.

These lines are held at high impedance to the last valid logic level during local bus "hold acknowledge" or "grant sequence".

S4	S3	Characteristics
0	0	Alternate data
0	1	Stack
1	0	Code or none
1	1	Data

BHE/S7      0      **BUS HIGH ENABLE/STATUS:** During T1 the bus high enable signal (BHE) should be used to enable data onto the most significant half of the data bus, pins D15-D8. Eight bit oriented devices tied to the upper half of the bus would normally use BHE to condition chip select functions. BHE is LOW during T1 for read, write, and interrupt acknowledge cycles when a byte is to be transferred on the high portion of the bus. The S7 status information is available during T2, T3, and T4. The signal is active LOW, and is held at high impedance to the last valid logic level during interrupt acknowledge and local bus "hold acknowledge" or "grant sequence"; it is LOW during T1 for the first interrupt acknowledge cycle.

BHE	A0	Characteristics
0	0	Whole word
0	1	Upper byte from/to odd address
1	0	Lower byte from/to odd address
1	1	None

RD      0      **READ:** Read strobe indicates that the processor is performing a memory or I/O read cycle, depending on the state of the M/IO or S2 pin. This signal is used to read devices which reside on the device local bus. RD is active LOW during T2, T3, and T4 of any read cycle, and is guaranteed to remain HIGH in T2 until the device local bus has floated.

This line is held at a high impedance logic one state during "hold acknowledge" or "grant sequence".

READY      I      **READY:** Is the acknowledgment from the addressed memory or I/O device that will complete the data transfer. The RDY signal from memory or I/O is synchronized by the 82C84A clock generator to form READY. This signal is active HIGH. The device READY input is not synchronized. Correct operation is not guaranteed if the setup and hold times are not met.

INTR      I      **INTERRUPT REQUEST:** Is a level triggered input which is sampled during the last clock cycle of each instruction to determine if the processor should enter into an interrupt acknowledge operation. A subroutine is vectored to via an interrupt vector lookup table located in system memory. It can be internally masked by software resetting the interrupt enable bit. INTR is internally synchronized. This signal is active HIGH.

TEST      I      **TEST:** Input is examined by the "Wait" instruction. If the TEST input is LOW execution continues, otherwise the processor waits in an "idle" state. This input is synchronized internally during each clock cycle on the leading edge of CLK.

NMI      I      **NON-MASKABLE INTERRUPT:** Is an edge triggered input which causes a type 2 interrupt. An interrupt service routine is called via an interrupt vector lookup table located in system memory. NMI is not maskable internally by software. A transition from LOW to HIGH initiates the interrupt at the end of the current instruction. This input is internally synchronized.

RESET      I      **RESET:** Causes the processor to immediately terminate its present activity. The signal must change from LOW to HIGH and remain active HIGH for at least four clock cycles. It restarts execution, as described in the instruction set description, when RESET returns LOW. RESET is internally synchronized.

STANDARD  
 MICROCIRCUIT DRAWING  
 DEFENSE ELECTRONICS SUPPLY CENTER  
 DAYTON, OHIO 45444

SIZE  
 A

5962-96728

REVISION LEVEL  
 A

SHEET  
 23

<u>Pin symbol</u>	<u>Type</u>	<u>Description - Continued.</u>
CLK	I	CLOCK: Provides the basic timing for the processor and bus controller. It is asymmetric with a 33 percent duty cycle to provide optimized internal timing.
V <sub>DD</sub>		V <sub>DD</sub> : +5 V power supply pin. A 0.1 μF capacitor between pin 20 and pin 40 is recommended for decoupling.
GND		GND: Ground. Note: Both must be connected. A 0.1 μF capacitor between pin 1 and pin 20 is recommended for decoupling.
MN/MX	I	MINIMUM/MAXIMUM: Indicates what mode the processor is to operate in. The two modes are discussed in the following sections.
M/I <sub>O</sub>	0	STATUS LINE: Logically equivalent to S <sub>2</sub> in the maximum mode. It is used to distinguish a memory access from an I/O access. M/I <sub>O</sub> becomes valid in the T <sub>4</sub> preceding a bus cycle and remains valid until the final T <sub>4</sub> of the cycle (M = HIGH, I <sub>O</sub> = LOW). M/I <sub>O</sub> is held to a high impedance logic one during local bus "hold acknowledge".
WR	0	WRITE: Indicates that the processor is performing a write memory or write I/O cycle, depending on the state of the M/I <sub>O</sub> signal. WR is active for T <sub>2</sub> , T <sub>3</sub> , and T <sub>W</sub> of any write cycle. It is active LOW, and is held to high impedance logic one during local bus "hold acknowledge".
INTA	0	INTERRUPT ACKNOWLEDGE: Is used as a read strobe for interrupt acknowledge cycles. It is active LOW during T <sub>2</sub> , T <sub>3</sub> , and T <sub>W</sub> of any write cycle. Note that INTA is never floated.
ALE	0	ADDRESS LATCH ENABLE: Is provided by the processor to latch the address into the 82C82/82C83 address latch. It is a HIGH pulse active during clock LOW of T <sub>1</sub> of any bus cycle. Note that ALE is never floated.
DT/R	0	DATA TRANSMIT/RECEIVE: Is needed in a minimum system that desires to use a data bus transceiver. It is used to control the direction of data flow through the transceiver. Logically, DT/R is equivalent to S <sub>1</sub> in maximum mode, and its timing is the same as for M/I <sub>O</sub> (T = HIGH, R = LOW). DT/R is held to a high impedance logic one during local bus "hold acknowledge".
DEN	0	DATA ENABLE: Provided as an output enable for a bus transceiver in a minimum system which uses the transceiver. DEN is active LOW during each memory and I/O access and for INTA cycles. For a read or INTA cycle it is active from the middle of T <sub>2</sub> until the middle of T <sub>4</sub> , while for a write cycle it is active from the beginning of T <sub>2</sub> until the middle of T <sub>4</sub> . DEN is held to a high impedance logic one during local bus "hold acknowledge".
HOLD HLDA	I 0	HOLD: Indicates that another master is requesting a local bus "hold". To be a acknowledged, HOLD must be active HIGH. The processor receiving the "hold" will issue a "hold" will a "hold acknowledge" (HLDA) in the middle of a T <sub>4</sub> or T <sub>1</sub> clock cycle. Simultaneously with the issuance of HLDA, the processor will float the local bus and control lines. After HOLD is detected as being LOW, the processor will lower HLDA, and when the processor needs to run another cycle, it will again drive the local bus and control lines.
		HOLD is not an asynchronous input. External synchronization should be provided if the system cannot otherwise guarantee the setup time.
S <sub>0</sub> , S <sub>1</sub> , S <sub>2</sub>	0	STATUS: Is active during T <sub>4</sub> , T <sub>1</sub> , and T <sub>2</sub> and is returned to the passive state (1,1,1) during T <sub>3</sub> or during T <sub>W</sub> when READY is HIGH. This status is used by the 82C88 bus controller to generate all memory and I/O access control signals. Any change by S <sub>2</sub> , S <sub>1</sub> , or S <sub>0</sub> during T <sub>4</sub> is used to indicate the beginning of a bus cycle, and the return to the passive state in T <sub>3</sub> or T <sub>W</sub> is used to indicate the end of a cycle.

STANDARD  
MICROCIRCUIT DRAWING  
DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-96728

REVISION LEVEL  
A

SHEET  
24

Pin symbol                      Type                      Description - Continued.

These signals are held at a high impedance logic one state during "grant sequence".

S2	S1	S0	Characteristics
0	0	0	Interrupt acknowledge
0	0	1	Read I/O port
0	1	0	Write I/O port
0	1	1	Halt
1	0	0	Code access
1	0	1	Read memory
1	1	0	Write memory
1	1	1	Passive

RQ/GT0  
RQ/GT1

I/O

REQUEST/GRANT: Pins are used by other local bus masters to force the processor to release the local bus at the end of the processor's current bus cycle. Each pin is bi-directional with RQ/GT0 having higher priority than RQ/GT1. RQ/GT has an internal pull-up bus hold device so it may be left unconnected. The request/grant sequence is as follows (see RQ/GT sequence timing).

1. A pulse of 1 CLK wide from another local bus master indicates a local bus request ("hold") to the device (pulse 1).
2. During a T4 or T1 clock cycle, a pulse 1 CLK wide from the device to the requesting master (pulse 2) indicates that the device has allowed the bus to float and that it will enter the "grant sequence" state at next CLK. The CPU's bus interface unit is disconnected logically from the local bus during "grant sequence".
3. A pulse 1 CLK wide from the requesting master indicates to the device (pulse 3) that the "hold" request is about to end and that the device can reclaim the local bus at the next CLK. The CPU then enters T4 (or T1 if no bus cycles pending).

Each master-master exchange of the local bus is a sequence of 3 pulses. There must be one idle CLK cycle after each bus exchange. Pulses are active low.

If the request is made while the CPU is performing a memory cycle, it will release the local bus during T4 of the cycle when all the following conditions are met:

1. Request occurs on or before T2.
2. Current cycle is not the low byte of a word (on an odd address).
3. Current cycle is not the first acknowledge of an interrupt acknowledge sequence.
4. A locked instruction is not currently executing.

If the local bus is idle when the request is made the two possible events will follow:

1. Local bus will be released during the next cycle.
2. A memory cycle will start within three clocks. Now the four rules for a currently active memory cycle apply with condition number 1 already satisfied.

LOCK

0

LOCK: Output indicates that other system bus masters are not to gain control of the system bus while LOCK is active LOW. The LOCK signal is activated by the "LOCK" prefix instruction and remains active until the completion of the next instruction. This signal is active LOW, and is held at a HIGH impedance logic one state during "grant sequence". In MAX mode, LOCK is automatically generated during T2 of the first INTA cycle and removed during T2 of the second INTA cycle.

STANDARD  
MICROCIRCUIT DRAWING  
DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-96728

REVISION LEVEL  
A

SHEET  
25

<u>Pin symbol</u>	<u>Type</u>	<u>Description</u> - Continued.															
QS1, QS0	0	<p>QUEUE STATUS: The queue status is valid during the CLK cycle after which the queue operation is performed.</p> <p>QS1 and QS2 provide status to allow external tracking of the internal device instruction queue. Note that QS1, QS0 never become high impedance.</p>															
	<table border="1"> <thead> <tr> <th>QS1</th> <th>QS0</th> <th></th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>No operation</td> </tr> <tr> <td>0</td> <td>1</td> <td>First byte of Op code from queue</td> </tr> <tr> <td>1</td> <td>0</td> <td>Empty the queue</td> </tr> <tr> <td>1</td> <td>1</td> <td>Subsequent byte from queue</td> </tr> </tbody> </table>	QS1	QS0		0	0	No operation	0	1	First byte of Op code from queue	1	0	Empty the queue	1	1	Subsequent byte from queue	
QS1	QS0																
0	0	No operation															
0	1	First byte of Op code from queue															
1	0	Empty the queue															
1	1	Subsequent byte from queue															

6.6 One part - one part number system. The one part - one part number system described below has been developed to allow for transitions between identical generic devices covered by the three major microcircuit requirements documents (MIL-H-38534, MIL-I-38535, and 1.2.1 of MIL-STD-883) without the necessity for the generation of unique PIN's. The three military requirements documents represent different class levels, and previously when a device manufacturer upgraded military product from one class level to another, the benefits of the upgraded product were unavailable to the Original Equipment Manufacturer (OEM), that was contractually locked into the original unique PIN. By establishing a one part number system covering all three documents, the OEM can acquire to the highest class level available for a given generic device to meet system needs without modifying the original contract parts selection criteria.

<u>Military documentation format</u>	<u>Example PIN under new system</u>	<u>Manufacturing source listing</u>	<u>Document listing</u>
New MIL-H-38534 Standard Microcircuit Drawings	5962-XXXXXZZ(H or K)YY	QML-38534	MIL-BUL-103
New MIL-I-38535 Standard Microcircuit Drawings	5962-XXXXXZZ(Q or V)YY	QML-38535	MIL-BUL-103
New 1.2.1 of MIL-STD-883 Standard Microcircuit Drawings	5962-XXXXXZZ(M)YY	MIL-BUL-103	MIL-BUL-103

6.7 Sources of supply.

6.7.1 Sources of supply for device classes Q and V. Sources of supply for device classes Q and V are listed in QML-38535. The vendors listed in QML-38535 have submitted a certificate of compliance (see 3.6 herein) to DESC-EC and have agreed to this drawing.

6.7.2 Approved sources of supply for device class M. Approved sources of supply for class M are listed in MIL-BUL-103. The vendors listed in MIL-BUL-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DESC-EC.

STANDARD MICROCIRCUIT DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-96728
		REVISION LEVEL A	SHEET 26

STANDARD MICROCIRCUIT DRAWING SOURCE APPROVAL BULLETIN

DATE: 96-03-08

Approved sources of supply for SMD 5962-96728 are listed below for immediate acquisition only and shall be added to MIL-BUL-103 during the next revision. MIL-BUL-103 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DESC-EC. This bulletin is superseded by the next dated revision of MIL-BUL-103.

Standard microcircuit drawing PIN	Vendor CAGE number	Vendor similar PIN 1/
5962-9672801VQC	34371	MD80C86/7

1/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE  
number

34371

Vendor name  
and address

Harris Semiconductor  
P.O. Box 883  
Melbourne, FL 32902-0883

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.