

**INCH-POUND**  
MIL-DTL-2726/12B  
14 February 2006  
SUPERSEDING  
MIL-R-2726/12A(SH)  
3 July 1986


**DETAIL SPECIFICATION SHEET**

**RECEPTACLE, ELECTRICAL, 3-PIN GROUNDED, 40-AMPERE, 125-VOLT,  
ALTERNATING CURRENT (SYMBOL NOS. 1144.1 AND 1144.2)**

Inactive for new design after 28 June 1999.

This specification is approved for use by all Departments  
and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this  
specification sheet and MIL-DTL-2726.

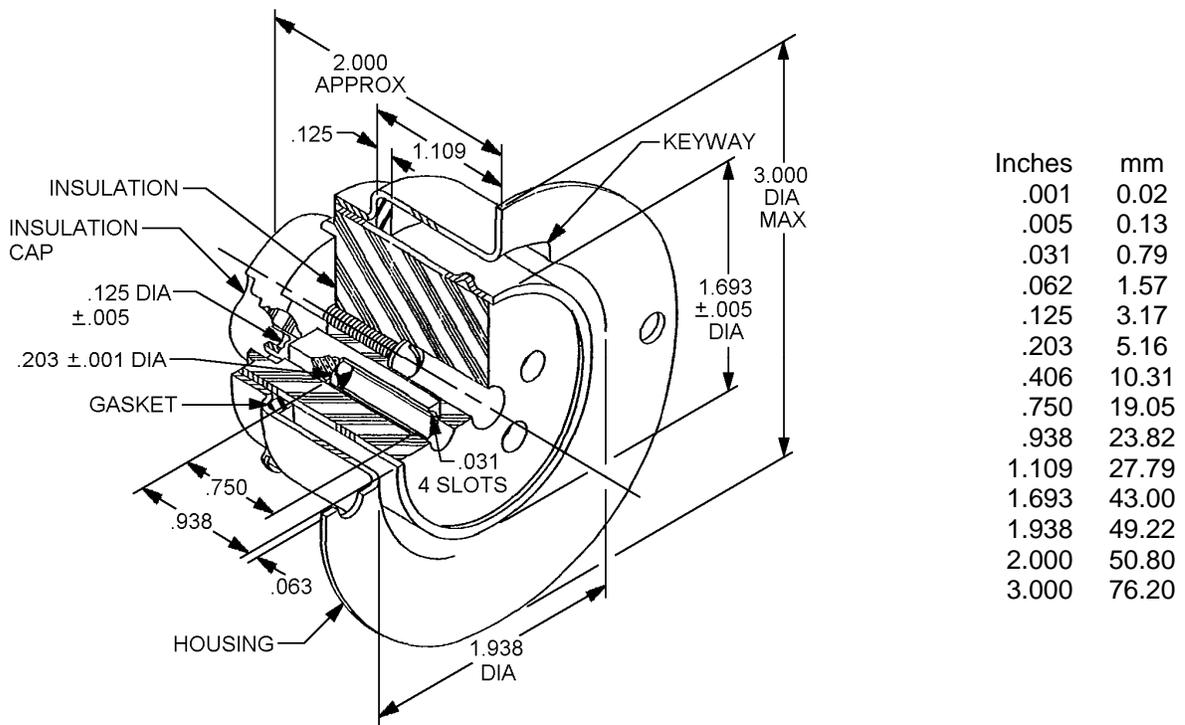

Symbol no. 1144.1

FIGURE 1. Receptacle (metal housing and shell).


MIL-DTL-2726/12B

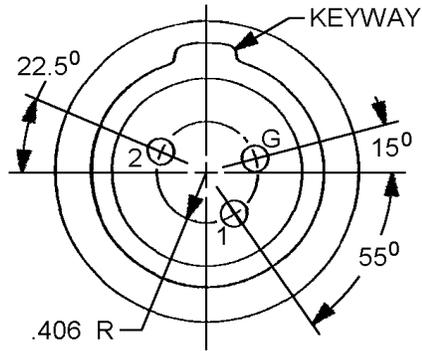

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are  $\pm .016$  (0.41mm) and  $\pm .5^\circ$  on angles.
4. Supersedes: Drawing 9000-S6202-73882, pc 65, symbol 1144.1.
5. Part or Identifying Number (PIN) M2726/12-001.


FIGURE 1. Receptacle (metal housing and shell) - Continued.

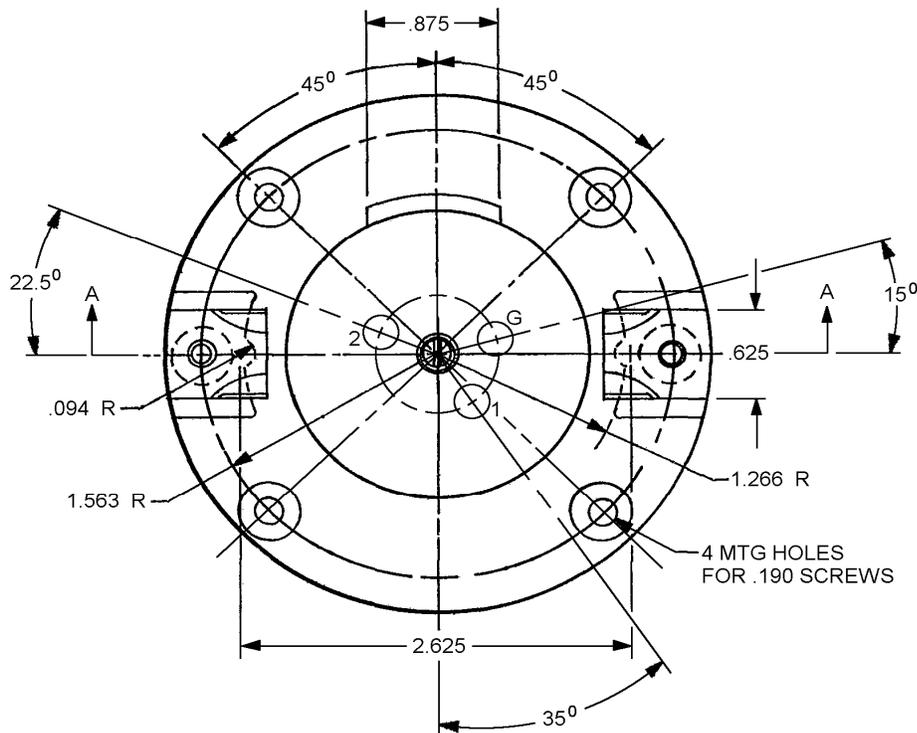

Symbol no. 1144.2

FIGURE 2. Receptacle (plastic body).

MIL-DTL-2726/12B

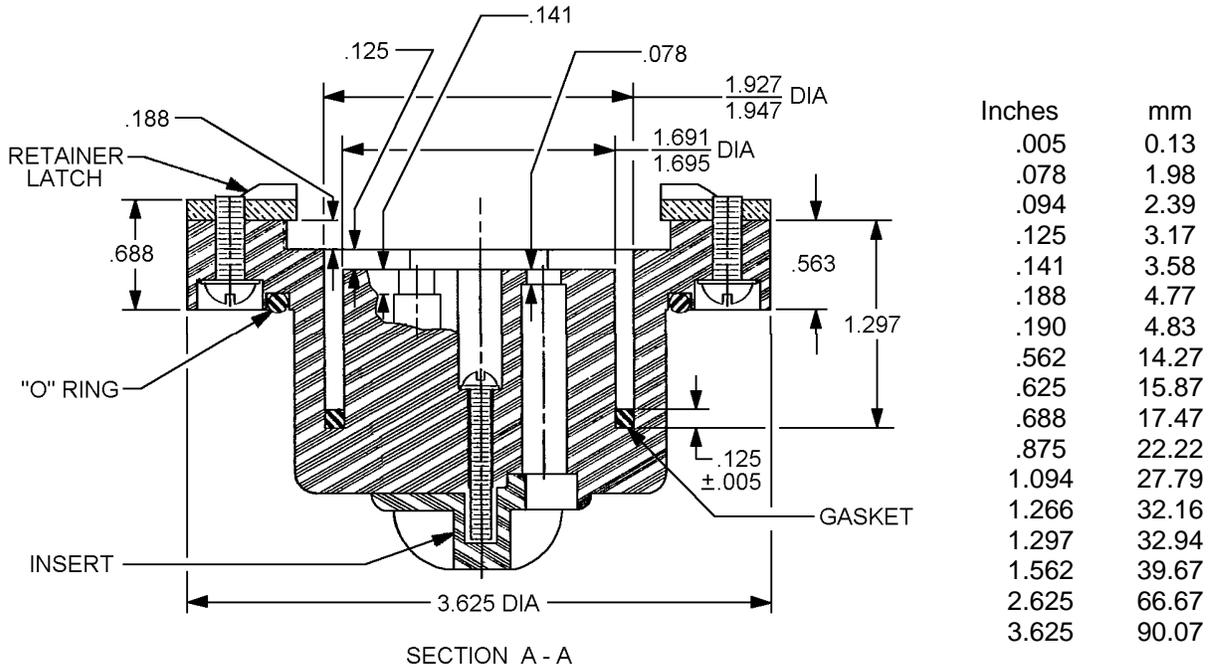

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are  $\pm .016$  (0.41mm) and  $\pm .5^\circ$  on angles.
4. PIN: M2726/12-002.

FIGURE 2. Receptacle (plastic body) - Continued.

REQUIREMENTS

Dimensions and configurations: See figures 1 and 2.

Effectiveness of enclosure: Watertight in accordance with MIL-STD-108 when mounted in a suitable enclosure.

Material: Housing optional polyamide (nylon) or metal.  
 Receptacle insulation and cap in accordance with ASTM-D5948 type MAI-60.  
 Contacts in accordance with ASTM-B441 copper alloy number 175, HT temper.

Contact hardness: Minimum of Rockwell 80F.

Mating plug: MIL-DTL-2726/5, PIN M2726/ 5-001.

Cap assembly: MIL-DTL-2726/13, PIN M2726/13-001.

MIL-DTL-2726/12B

Design: Housing and insulation may be a one-piece molded unit.

Gasket: Neoprene, commercial (COML), durometer number 20. Lubricate with silicon compound.

O-ring: as specified in SAE-AS28775.

Electrical rating: 40-ampere, 125-volt, alternating current, 60-hertz.

PIN: M2726/11-001 (metal housing and shell), MS2726/11-002 (plastic body).

Contact finish: Silver plate.

Verification

Verification shall be as specified in MIL-DTL-2726 and table I herein. The first article and conformance inspections shall consist of the inspections as specified in table I, in the order shown.

TABLE I. First article and quality conformance inspection.

Inspection	First article	Conformance
Examination	X	X
Insulation resistance	X	X
Dielectric withstanding Voltage	X	X
Contact resistance	X	X
Endurance	X	
Salt spray	X	
Contact resistance	X	
Current load	X	
Vibration	X	
Shock	X	
Effectiveness of enclosure	X	X
Dielectric withstanding voltage	X	
Mechanical abuse	X	
Ball drop impact	X	
Strain relief	X	
Rockwell hardness	X	

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

- ASTM-B441
- ASTM-D5948
- MIL-DTL-2726/6
- MIL-DTL-2726/13
- MIL-STD-108
- SAE-AS28775

MIL-DTL-2726/12B

CONCLUDING MATERIAL

Custodians:

Navy - SH

DLA - CC

Preparing activity

DLA - CC

(Project 5935-4617-010)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.