


DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK, ENVIRONMENTALLY SEALED,
 SCREW TERMINAL, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and MIL-DTL-8834.

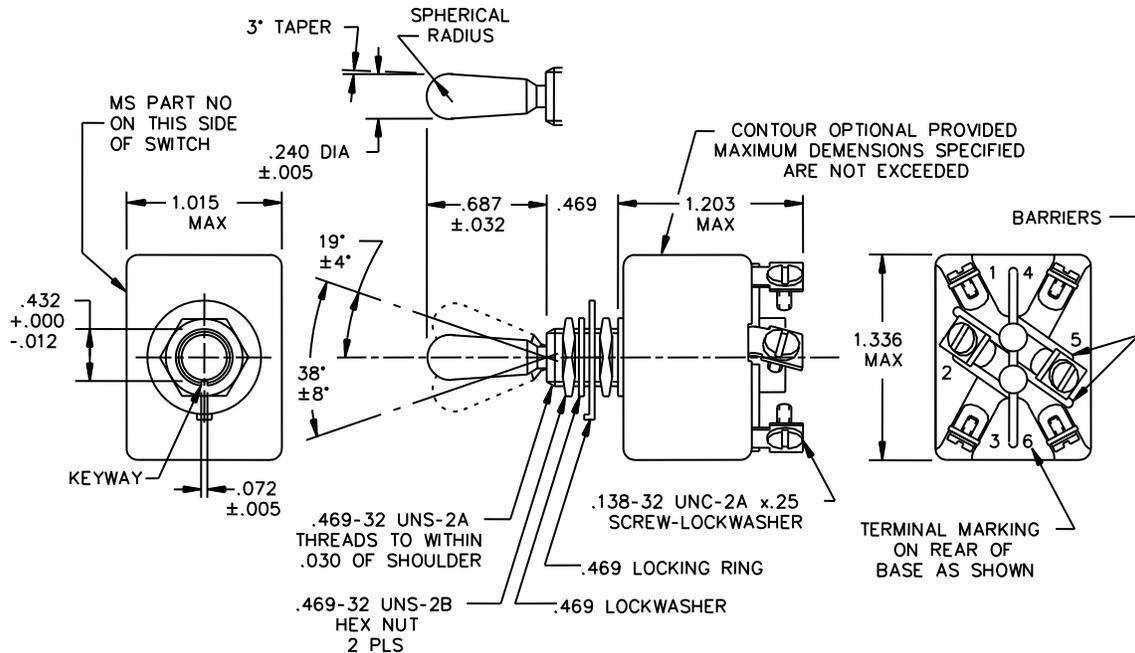

Inches	mm	Inches	mm
.005	0.13	.250	6.35
.012	0.30	.432	10.97
.030	0.76	.469	11.91
.032	0.81	.687	17.45
.072	1.83	1.015	25.78
.138	3.51	1.203	30.56
.240	6.10	1.336	33.93

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.010 (0.25 mm) on decimals and $\pm 5^\circ$ on angles.

FIGURE 1. Dimensions and configuration - Continued.



MS25307L
w/Amendment 1

REQUIREMENTS:

For hardware and terminal screw detail specifications, see appendix of MIL-DTL-8834.

In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

The MS dash numbers supersede and are completely interchangeable with the superseded dash numbers.

Example of Part or Identifying Numbers (PIN):

MS25307-212 = on-off-on environmentally sealed switch.

MS25307-272 = mom-on, off, mom-on environmentally sealed switch

Maximum weight: .1262 pound maximum (57.2 grams).

Altitude requirements: 80,000 feet.

115 V ac 60 hertz electrical endurance tests are to be performed at room temperature and pressure.

TABLE I. Detail requirements.

MS dash no.	Circuit made between terminals as indicated with the toggle lever in these positions			Current capacity amperes per pole 28 volts dc <u>1/</u>			Current capacity amperes per pole 115 volts 400 hertz <u>1/</u>			Circuit capacity amperes per pole 115 volts 60 hertz <u>1/</u>			Life low current level switching 30 mV	Super-seeded dash number Toggle sealed
	Environmentally sealed	Opposite keyway side	Center position	Keyway side	Lamp load circuit	Resis-tive circuit	Induc-tive circuit	Lamp load circuit	Resis-tive circuit	Induc-tive circuit	Lamp load circuit	Resis-tive circuit		
-212	on 2-3, 5-6	off	on 1-2, 4-5	7	25	15	7	25	15	7	20	15	10 mA	-211
-222		none	off on 1-2, 4-5											-221
-232		off	none											-231
-242		none	mom-on 1-2, 4-5											-241
-262		off	mom-off											-261
-272	on 2-3, 5-6	none	mom-on 1-2, 4-5											-271
-282	off	none	mom-off											-281
-292	on 2-3, 5-6	none	mom-on 1-2, 4-5											-291
-302	off	none	mom-on 1-2, 4-5											-301
-312	on 2-3, 5-6	off	mom-on 1-2, 4-5	-311										

See footnote at end of table.

MS25307L
w/Amendment 1

TABLE I. Detail requirements - Continued

MS dash no.	Current capacity amperes per pole 250 volts 60 hertz ac ^{1/}			Current capacity amperes per pole 125 volts dc ^{1/}			Circuit capacity amperes per pole 250 volts dc ^{1/}			Life low current level switching 30 mV	Super-seeded dash number Toggle sealed
	Environmental sealed	Lamp load circuit	Resis-tive circuit	Induc-tive circuit	Lamp load circuit	Resis-tive circuit	Induc-tive circuit	Lamp load circuit	Resis-tive circuit		
-212											-211
-222											-221
-232											-231
-242											-241
-262		10	7		750 mA	---		500 mA	---	10 mA	-261
-272											-271
-282											-281
-292											-291
-302											-301
-312											-311

^{1/} Application information ratings at room temperature.

Referenced documents:
MIL-DTL-8834

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA – CC
(Project 5930-2016-017)

Review activities:
Army - AV, MI
Navy - EC
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil/>.