


PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR129/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and [MIL-PRF-3098](#).

Pertinent characteristics: 9 MHz to 12 MHz; fundamental; noncontrolled; antiresonance.

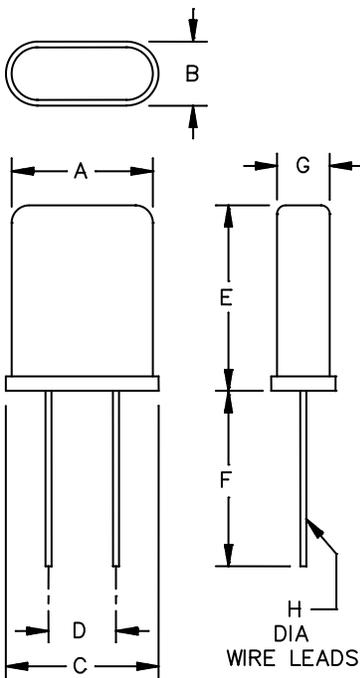

Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	.402	---	10.21
B	---	.183	---	4.65
C	---	.435	---	11.05
D	.184	.200	4.67	5.08
E	---	.530	---	13.46
F	.50	---	12.7	---
G	---	.150	---	3.81
H	.015	.019	0.38	0.48

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with [MIL-PRF-3098](#).

FIGURE 1. Crystal unit - CR129/U.

MIL-PRF-3098/110E

REQUIREMENTS:

- Dimensions, marking, and configuration: See figure 1.
- Frequency range: 9.0 MHz to 12.0 MHz, inclusive.
- Capacitance, shunt: 7.0 pF, maximum.
- Mode of oscillation: Fundamental.
- Rated drive level: 1.0 mW, maximum.
- Antiresonance, load capacitance: 32.0 pF \pm 0.5 pF.
- Operating temperature range (noncontrolled): -55°C to +90°C, inclusive.
- Frequency tolerance: \pm 35 ppm.

Equivalent resistance:	<u>MHz</u>	<u>Ohms, maximum</u>
	9.0 to 10.0	35
	10.0+ to 12.0	25

Shock (specified pulse): [Method 213, MIL-STD-202](#), test condition K; consisting of 18 impact shocks of 15 gravity units each having a duration of 11 milliseconds; 3 shocks along each direction in each of 3 mutually perpendicular planes.

- Frequency change permitted: \pm 5 ppm.
- Equivalent resistance: \pm 15 percent or 2 ohms, whichever is greater.

Vibration: [Method 204, MIL-STD-202](#); test condition A.

- Frequency change permitted: \pm 5 ppm.
- Equivalent resistance change permitted: \pm 15 percent or 2 ohms, whichever is greater.

Thermal shock:

- Frequency change permitted: \pm 5 ppm.
- Equivalent resistance change permitted: \pm 15 percent or 2 ohms, whichever is greater.

Aging:

- Frequency change permitted: \pm 5 ppm.

Part or Identifying Number (PIN): For Product Level B, PIN shall be CR129/U or CR129B/U (followed by specified frequency). For Product Level S, PIN shall be CR129S/U (followed by specified frequency), see 1.2 of [MIL-PRF-3098](#).

Reference documents. In addition to [MIL-PRF-3098](#), this document references the following:

[MIL-PRF-202](#)

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MIL-PRF-3098/110E

Custodians:

Army - CR
Navy - EC
Air Force - 99
DLA - CC

Review activities:

Air Force - 19, 84

Preparing activity:

Army - CR

Agent:

DLA - CC

(Project 5955-2011-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil>.