

INCH-POUND

MIL-PRF-55339/11A

25 August 2004

SUPERSEDING

MIL-PRF-55339/11


6 May 1975

PERFORMANCE SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY (WITHIN SERIES C), CLASS 2, "T" PLUG

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall
consist of this specification sheet and MIL-PRF-55339.

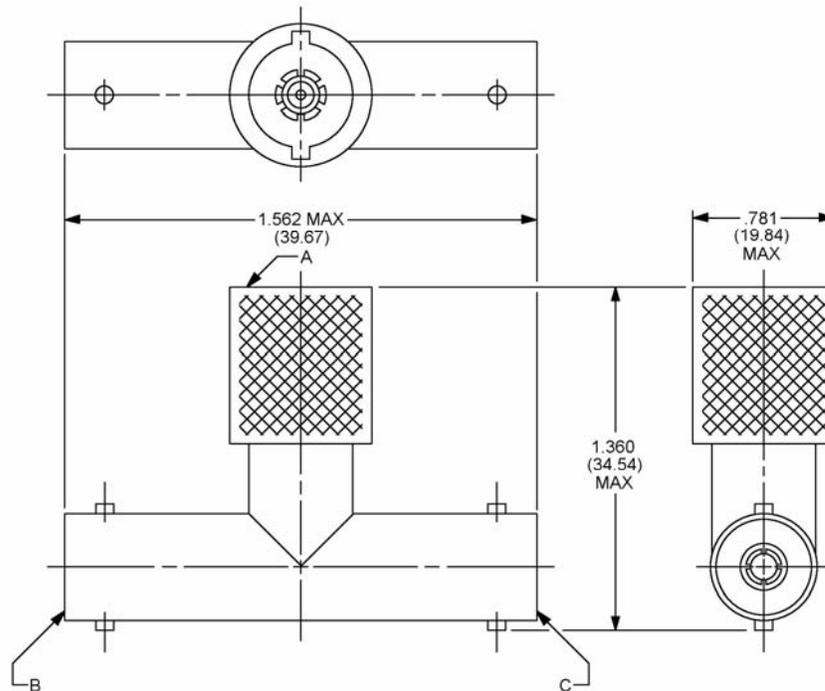

Reference	Series	Contact
A	C	Pin
B and C	C	Socket

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All undimensioned pictorial representations are for reference purposes only.
4. Interface dimensions to be in accordance with MIL-STD-348, series C pin contact and series C socket contact.

FIGURE 1. General configuration.

DESIGN AND CONSTRUCTION

General configuration: See figure 1.

Impedance: 50 ohms, nominal.

Working voltage: Sea level – 1,000 V rms.
70,000 feet (4.437 kPa) – 250 V rms.

Frequency range: 0 to 11 GHz.

Temperature range: -65° to +165°C.

PERFORMANCE (installation torque is not applicable)

Dimensions: See figure 1 and MIL-STD-348.

Center contact retention: Axial force – 6 lb. (26.69 N), min.
Torque – 4 in-oz. (0.03 Nm), min.

Force to engage and disengage: Longitudinal force – 4.5 lb. (20.02 N), max.
Torque – 4 in-lb. (0.45 Nm), max.

Coupling proof torque: Not applicable.

Mating characteristics:

Center contact (socket):

Oversize test pin dia. - .098 in. (2.49 mm), min.
Insertion depth - .125 in. (3.18 mm), min.
Number of insertions – 1.

Max test pin (insertion force test):

Steel test pin dia. - .092 in. (2.34 mm), min.
Pin finish – 16 microinches (0.41µm).
Insertion force – 2 lb. (8.89 N), max.
Number of insertions – 1.

Min test pin (withdrawal force):

Steel test pin dia. - .090 in. (2.29 mm), max.
Pin finish – 16 microinches (0.41µm).
Withdrawal force – 2 oz. (0.56 N), min.
Number of withdrawals – 1.

Outer contact:

Min test ring ID - .411 in. (10.44 mm), max.
Ring finish – 16 microinches (0.41µm).
Insertion force – 7 lb. (31.14 N), max.
Insertion depth - .125 in. (3.18 mm), min.
Number of insertions – Not applicable.

Max test ring ID - .419 in. (10.64 mm), min.
Test ring finish – Not applicable.
Insertion depth - .031 in. (0.79 mm), max.
Number of insertions – Not applicable.

MIL-PRF-55339/11A

Permeability: <2.0.

Seal: Hermetic – Not applicable.
Pressurized – Not applicable.
Weatherproof – Not applicable.

Insulation resistance: 5,000 megohms, min.

VSWR: Not applicable.

RF leakage (total): Not applicable.

RF insertion loss: Not applicable.

Durability: 500 cycles minimum at 12 cycles/min, maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Dielectric withstanding: Test voltage, 3,000 V rms, min (sea level).

Contact resistance (milliohms, max):

<u>Contact</u>	<u>Initial</u>	<u>After environmental</u>
Center	2.5	3.0
Outer	0.20	N/A
Outer (-70001)	0.4	N/A

Vibration, high frequency: Interruptions – 1 μ s, max.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, min.

Corona level: Voltage – 750 V, min.
Altitude - 70,000 feet (4.437 kPa), min.

RF high potential withstanding voltage: RF voltage – 2,500 V rms. min.
Frequency – 5 MHz, min.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: 100 lb (444.82), min.

Part or Identifying Number (PIN): M55339/11-00566 or M55339/11-70001.

PIN: M55339/11-70001. CAUTION: THIS PART HAS A NICKEL PLATED BODY AND IS NOT FOR USE IN APPLICATIONS WHERE PASSIVE INTERMODULATION GENERATION (PIM) MAY BE A CONCERN.

Cross reference: See table I.

TABLE I. Cross reference of PIN.

PIN	Superseded PIN or type designation <u>1/</u>
M55339/11-00566	MS35320 UG-566A/U

1/ The superseded PIN or the type designation is for cross reference only. Where a superseded PIN or type designation is not given, none was assigned or will be assigned. The PIN M55339/11-00566 shall be used in all cases for marking and identifying the adapter.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-PRF-55339, this document references the following:

MIL-STD-348

CONCLUDING MATERIAL

Custodians:

Army – CR
Navy – EC
Air Force – 11
DLA - CC

Preparing activity:

DLA - CC
(Project 5935-4657-010)

Review activities:

Army – AR, AT, EA, MI
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.