

INCH-POUND

MIL-PRF-83401/18C
w/ Amendment 2
18 August 2016
SUPERSEDING
MIL-PRF-83401/18C
w/ Amendment 1
3 February 2011

PERFORMANCE SPECIFICATION SHEET

RESISTOR NETWORK, FIXED, FILM
STYLE RZ180, 6 PIN SIP


This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and [MIL-PRF-83401](#).

1. SCOPE

1.1 Scope. This specification covers the associated requirements for style RZ180, 6 pin single in-line package (SIP) resistor network. This style is available in characteristic K and resistance tolerance G. This specification has two product levels, a high reliability, 100 percent burn-in screened "M" part number and a nonburn-in screened part number "C". Designers are CAUTIONED on using these resistors in high power pulses applications (see [6.4](#)).

1.2 Part or Identifying Number (PIN). Resistor networks covered by this specification are identified by a PIN which will consist of the basic number of this specification and a coded number. The PIN is in the following form:

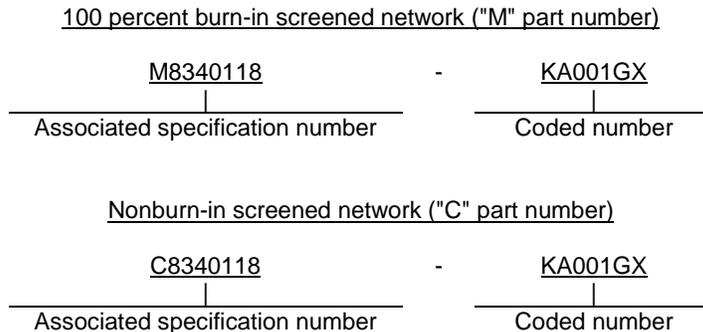


The coded number is derived in accordance with [MIL-PRF-83401](#).

Comments, suggestions, or questions on this document should be addressed to: DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990, or emailed to resistor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at <https://assist.dla.mil>.



MIL-PRF-83401/18C
w/ Amendment 2

1.2.1 Schematic. The schematics of the resistor networks are identified by the following part numbers in accordance with the drawings below.

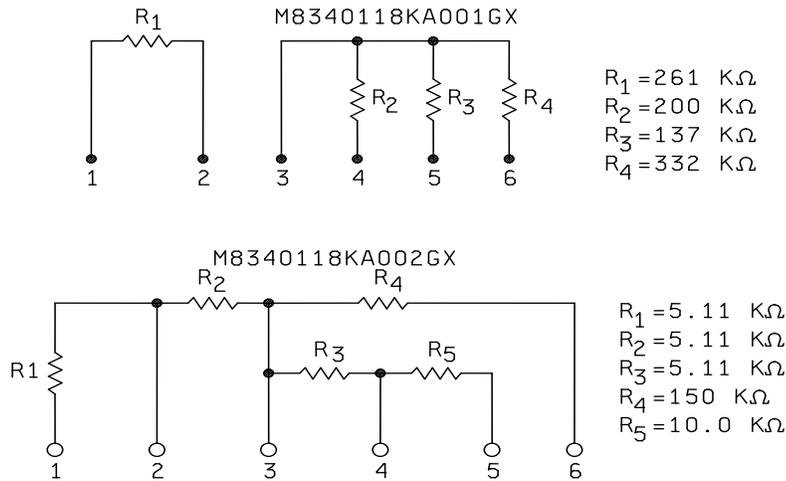

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-83401 - Resistor Network, Fixed, Film, and Capacitor-Resistor Network, Ceramic Capacitor and Fixed, Film, Resistor, General Specification for.

* (Copies of these documents are available online at <http://quicksearch.dla.mil/>.)

* 2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein (except for related, specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

MIL-PRF-83401/18C
w/ Amendment 2

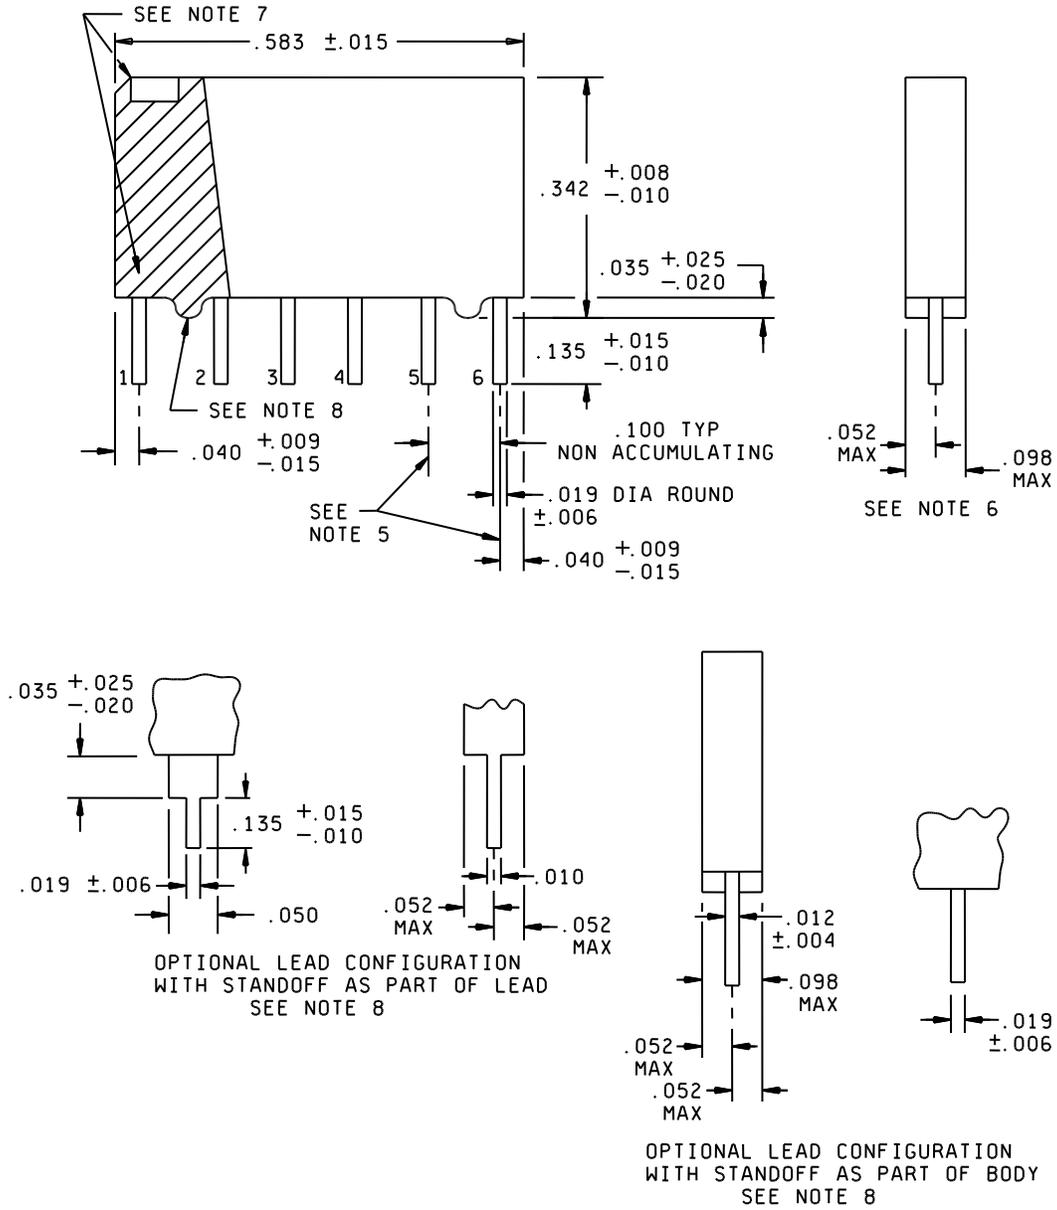


FIGURE 1. Style RZ180 resistors.

MIL-PRF-83401/18C
w/ Amendment 2

| Inches | mm | Inches | mm |
|--------|------|--------|-------|
| .004 | 0.10 | .025 | 0.64 |
| .006 | 0.15 | .035 | 0.89 |
| .009 | 0.23 | .040 | 1.02 |
| .010 | 0.25 | .050 | 1.27 |
| .012 | 0.30 | .052 | 1.32 |
| .015 | 0.38 | .098 | 2.49 |
| .019 | 0.48 | .100 | 2.54 |
| .020 | 0.51 | .135 | 3.43 |
| .023 | 0.58 | .187 | 4.75 |
| | | .583 | 14.81 |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.005 inch (0.13 mm).
4. The picturization of the styles above is given as representative of the envelope item. Slight deviations from the outline shown, which are contained within the envelope and do not alter the functional aspects of the device, are acceptable.
5. Terminal centerline to centerline measurements made at point of emergence of the lead from the body.
6. Measurements made at the point of emergence of the lead of the body.
7. Pin 1 locator shall be a dot, notch, stripe, or numeral 1 adjacent to pin no. 1, in the shaded area; also, additional marking may be placed on top edge where the bevel may be located.
8. If the standoffs are located on the body, a minimum of two standoffs are required as illustrated. As an option, additional standoffs may be located on the body of the resistor network. If leads with standoffs are used, standoffs on the body are not required.

FIGURE 1. Style RZ180 resistors - Continued.

3. REQUIREMENTS

3.1 Associated specifications. The individual item requirements shall be in accordance with [MIL-PRF-83401](#), as specified herein.

3.2 Interface and physical dimensions. The resistor shall meet the interface and physical dimensions specified on [figure 1](#).

3.3 Power rating (70°C). The power ratings shall be in accordance with [table I](#).

TABLE I. Power ratings.

| PIN | Element power rating (watts) | Network power rating (watts) |
|------------------------------------|------------------------------|------------------------------|
| M8340118KA001GX C8340118KA001GX | 0.10 | 0.40 |
| M8340118KA002GX C8340118KA002GX | 0.10 | 0.50 |

MIL-PRF-83401/18C
w/ Amendment 2

3.4 Power conditioning. The power applied for power conditioning shall be 1.5 times rated power.

3.5 Voltage rating. The maximum continuous working voltage for each resistor shall not exceed 50 volts dc or ac rms.

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with [MIL-PRF-83401](#).

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see [6.2](#)). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in [MIL-PRF-83401](#) are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

- a. Title, number, and date of this specification, and the complete PIN (see [1.2](#)).
- b. Unless otherwise specified (see [2.1](#)), the versions of the individual documents referenced will be those in effect on the date of release of the solicitation.
- c. Packaging requirements, such as electrostatic discharge (ESD) sensitivity) (see [5.1](#)).

6.3 Electrostatic charge. Under several combinations of conditions, these resistors can be electrically damaged, by electrostatic charges, and drift from specified value. Users should consider phenomena when ordering or shipping resistors. Direct shipment to the Government is controlled by [MIL-DTL-39032](#) which specifies a preventive packaging procedure.

6.4 Pulse applications. Designers are CAUTIONED on using these resistors in high power pulse applications. Since they have not been qualified nor tested for such applications, damage and premature failure are possible.

MIL-PRF-83401/18C
w/ Amendment 2

6.5 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5905-2016-037)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.