

INCH-POUND

MS14306D
1 November 2015
SUPERSEDING
MS14306C
15 December 2009

DETAIL SPECIFICATION SHEET

FITTINGS, PIPE, BRASS OR BRONZE, THREADED (REDUCERS, CLOSE AND OPEN RETURN BENDS, AND 45-DEGREE Y-BRANCHES), CLASS 125

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and WW-P-460.

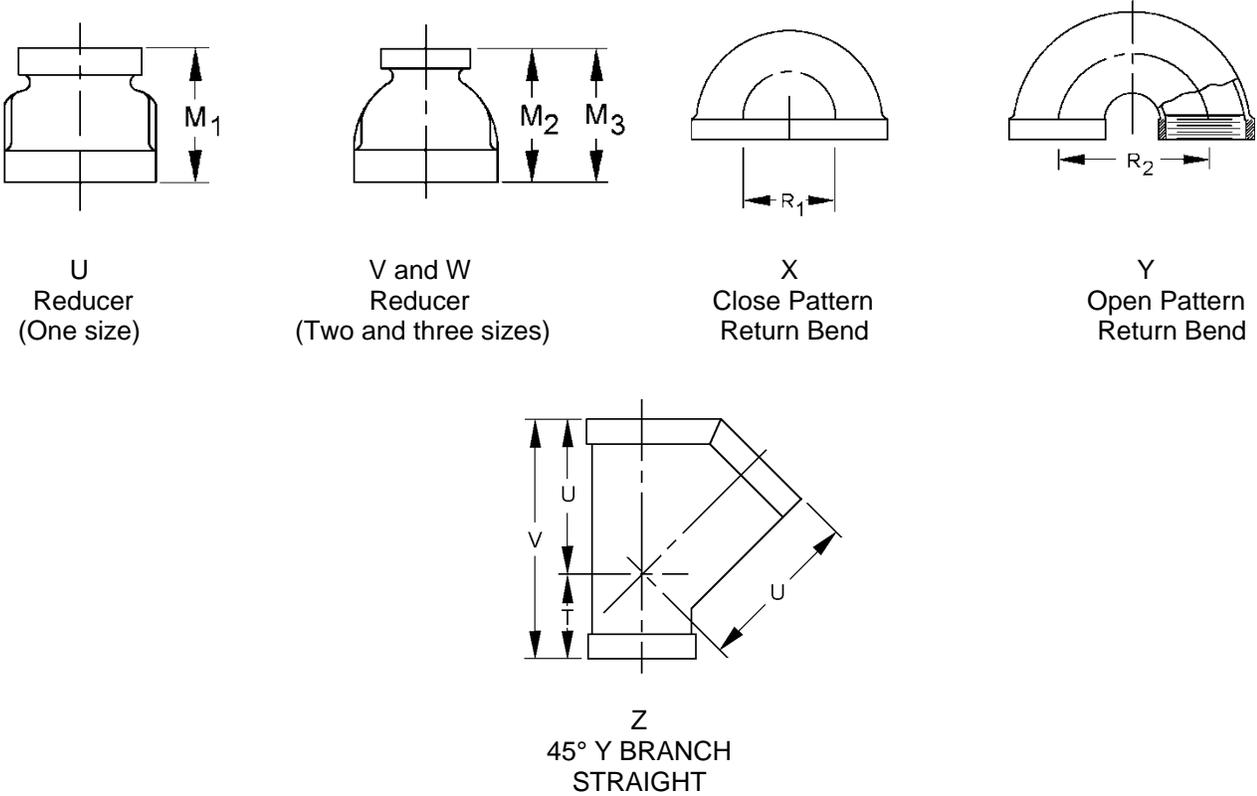


FIGURE 1. Reducers, bends and Y-branch fittings.



Dash size and fitting type designators.

Dash number	Pipe size inch (fraction)	mm	Reducers (see note 4)		
			M1 U	M2 V	M3 W
			one size	two sizes	three sizes
-1	1/4 (.250)	6.35	1/8
-2	3/8 (.375)	9.53	1/4	1/8
-3	1/2 (.500)	12.70	3/8	1/4
-4	3/4 (.750)	19.05	1/2	3/8
-5	1 (1.000)	25.40	3/4	1/2	3/8
-6	1-1/4 (1.250)	31.75	1	3/4
-7	1-1/2 (1.500)	38.10	1 1/4	1
-8	2 (2.000)	50.80	1 1/2	1 1/4	1
-9	2-1/2 (2.500)	63.50	2	1 1/4
-10	3 (3.000)	76.20	2 1/2	2
-11	4 (4.000)	101.60	3

Dash number	Pipe size inch (fraction)	mm	Close pattern return bend X	Open pattern return bend Y	45° Y- branch straight Z
-1	1/4 (.250)	6.35
-2	3/8 (.375)	9.53	Z
-3	1/2 (.500)	12.70	X	Y	Z
-4	3/4 (.750)	19.05	X	Y	Z
-5	1 (1.000)	25.40	X	Y	Z
-6	1-1/4 (1.250)	31.75	Y	Z
-7	1-1/2 (1.500)	38.10	Y	Z
-8	2 (2.000)	50.80	Y	Z

NOTES:

- Dimensions are in inches.
- Metric equivalents are given for information only.
- Dimensions: In accordance with ASME-B16.15, table titled "Dimensions of Reducers, Closed and Open Pattern Return Bends, and 45-degree Y Branches (Straight Sizes) - Class 125".
- The reduced sizes refer to the indicated nominal pipe size in column 2. Example: -3U refers to the 1/2 x 3/8 reducer size and -5W refers to the 1 inch to 3/8 reducer size.

FIGURE 1. Reducers, bends and Y-branch fittings – Continued.

Requirements

Material:

Non-potable water: Brass or bronze (lead) in accordance with ASME-B16.15.


Potable water: Brass alloys C89510 or C89520 in accordance with ASTM B584 or C89550 in accordance with Copper Development Association Inc.

Threads: In accordance with ASME-B16.15.

Protective coating: None.

MS14306D

PIN: The PIN consists of the MS prefix, specification number, dash number for size, Outside head, inside head, face designator, thread designator, a dash, non-potable water (Blank) or potable water dash letters (-PW). When left-hand threads are required, add the letter "L" to the PIN.

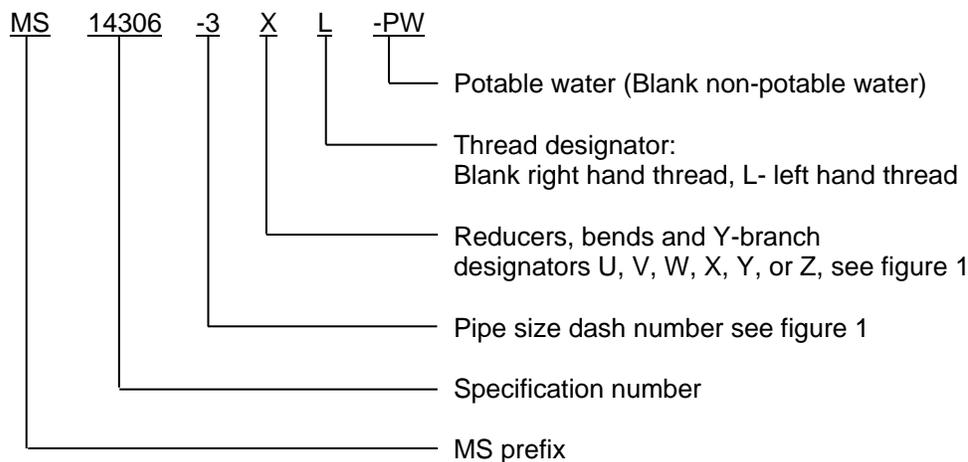

Examples:

MS14306-5Y represents a 1 inch Nominal Pipe Size (NPS) open pattern return bend non-potable water.

MS14306-5Y-PW represents a 1 inch NPS open pattern return bend potable water.

MS14306-8ZL represents a 2 inch NPS 45° Y-branch, left-hand threads non-potable water.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Brass fittings for potable water use may be substituted for non-potable water brass fittings. Non-potable brass fittings shall not be substituted for potable water fittings.

January 4, 2014, Federal Public Law 111-380 prohibits the sale of plumbing fixtures with a wetted surface area containing more than a weighted average of 0.25% lead.

Marking: In accordance with ASME-B16.15, additional marking for potable water fittings shall be as described below.

Potable water fittings. Brass reducers close and open return bends, and 45° Y-branches for potable water systems shall be certified and marked as specified:

Many State plumbing codes require the use of products that are in compliance with NSF/ANSI standards 61 and 372. NSF/ANSI Standard 372 is a certification process by which independent laboratories verify that the plumbing product is in compliance with the requirements of the 2011 Reduction of Lead in Drinking Water Act. Products will bear the mark of the laboratory that has independently certified that the product meets the standard. EPA published a brochure to assist the public with identifying the various marks that indicate a product has been certified as lead free to the new requirement of the Act: "How to Identify Lead-Free Certification Marks for Drinking Water System & Plumbing Materials." You can access the document at <http://nepis.epa.gov/Exe/ZyPDF.cgi?Dockkey=P100LVYK.txt>.

Non-potable water fittings. Brass reducers close and open return bends, and 45° Y-branches not for potable water systems shall be tagged:

NOT FOR USE IN POTABLE WATER SYSTEMS.

The tag shall be removable by the end item user.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to WW-P-460, this document references the following:

Reduction of Lead in Drinking Water Act
ASME-B16.15
ASTM B584
NSF/ANSI Standard 61
NSF/ANSI Standard 372

CONCLUDING MATERIAL

Custodians:

Army - AT
Navy - MC
Air Force - 99
DLA - CC

Preparing activity:

DLA - CC

(Project 4730-2015-061)

Review activities:

Army - AR, CE, EA
Navy - SA, SH, YD
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.