

REVISIONS

LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Corrections to t_{W2} , t_{W3} , and t_{W4} in paragraph 1.4. Corrections to t_{THU}/t_{TLH} , t_{PHL1}/t_{PLH1} , and t_{PHL2} in table I. Correction to table II. Editorial changes throughout.	93-09-29	Monica L. Poelking
B	Update boilerplate to MIL-PRF-38535 requirements. Editorial changes throughout. - LTG	03-08-22	Thomas M. Hess
C	Correct the condition I_O for V_{OH} and V_{OL} test in table I. Update boilerplate paragraphs to the latest MIL-PRF-38535 requirements. - jak	10-04-26	Thomas M. Hess
D	Update boilerplate paragraphs to MIL-PRF-38535 requirement. - LTG	16-05-25	Thomas M. Hess



REV																				
SHEET																				
REV																				
SHEET																				


REV STATUS OF SHEETS	REV	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
	SHEET	1	2	3	4	5	6	7	8	9	10	11	12	13		

PMIC N/A	PREPARED BY Marcia B. Kelleher	<p align="center">DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 http://www.landandmaritime.dla.mil</p>		
<p align="center">STANDARD MICROCIRCUIT DRAWING</p> <p>THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE</p> <p align="center">AMSC N/A</p>	CHECKED BY Monica L. Poelking			
	APPROVED BY Michael A. Frye	<p align="center">MICROCIRCUIT, DIGITAL, CMOS, DUAL PRECISION MONOSTABLE MULTIVIBRATOR MONOLITHIC SILICON</p>		
	DRAWING APPROVAL DATE 91-12-17			
	REVISION LEVEL D	<table border="1"> <tr> <td>SIZE A</td> <td>CAGE CODE 67268</td> <td>5962-90557</td> </tr> </table>	SIZE A	CAGE CODE 67268
SIZE A	CAGE CODE 67268	5962-90557		
		SHEET 1 OF 13		

1. SCOPE

1.1 Scope. This drawing describes device requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A.

1.2 Part or Identifying Number (PIN). The complete PIN is as shown in the following example:

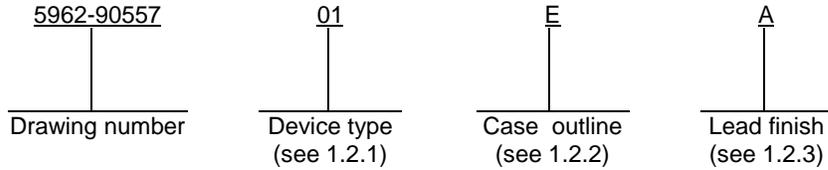

1.2.1 Device type(s). The device type(s) identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	14538B	Dual precision retriggerable/resettable monostable multivibrator
02	14538B	Dual precision retriggerable/resettable monostable multivibrator

1.2.2 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
E	GDIP1-T16 or CDIP2-T16	16	Dual-in-line

1.2.3 Lead finish. The lead finish is as specified in MIL-PRF-38535, appendix A.

1.3 Absolute maximum ratings. 1/ 2/

- Supply voltage range, device type 01 -0.5 V dc to +20 V dc
- Supply voltage range, device type 02 -0.5 V dc to +18 V dc
- Input voltage range -0.5 V dc to $V_{DD} + 0.5$ V dc
- DC input current ± 10 mA
- Storage temperature range -65°C to +150°C
- Maximum power dissipation (P_D) 500 mW 3/
- Lead temperature (soldering, 10 seconds) +300°C
- Thermal resistance, junction-to-case (θ_{JC}): See MIL-STD-1835
- Junction temperature (T_J) +175°C

1/ Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.

2/ Unless otherwise specified, all voltages are referenced to ground.

3/ For $T_C = +100^\circ\text{C}$ to $+125^\circ\text{C}$, derate linearly at 12 mW/°C to 200 mW.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90557
		REVISION LEVEL D	SHEET 2

1.4 Recommended operating conditions.

Supply voltage (V_{DD}):

Device type 01 +3.0 V dc to +18 V dc
 Device type 02..... +3.0 V dc to +15 V dc
 Input voltage range (V_{IN}) 0.0 V dc to V_{DD}
 Output voltage range (V_{OUT})..... 0.0 V dc to V_{DD}
 Case operating temperature range (T_C) -55°C to +125°C

Minimum input pulse width, +TR, -TR, or RESET (t_{W1}):

$T_C = +25^\circ\text{C}$, $V_{DD} = 5\text{ V dc}$:
 Device type 01 140 ns
 Device type 02 170 ns
 $T_C = +25^\circ\text{C}$, $V_{DD} = 10\text{ V dc}$:
 Device type 01 80 ns
 Device type 02 90 ns
 $T_C = +25^\circ\text{C}$, $V_{DD} = 15\text{ V dc}$:
 Device type 01 60 ns
 Device type 02 80 ns

Minimum output pulse width, Q or \bar{Q} (t_{W2}):

Device type 01:
 $C_X = 0.005\ \mu\text{F}$, $R_X = 10\ \text{k}\Omega$
 $T_C = +25^\circ\text{C}$, $V_{DD} = 5\text{ V dc}$ 64.5 μs
 $T_C = +25^\circ\text{C}$, $V_{DD} = 10\text{ V dc}$ 63.0 μs
 $T_C = +25^\circ\text{C}$, $V_{DD} = 15\text{ V dc}$ 63.5 μs
 Device type 02:
 $C_X = 0.002\ \mu\text{F}$, $R_X = 100\ \text{k}\Omega$
 $T_C = +25^\circ\text{C}$, $V_{DD} = 5\text{ V dc}$ 198 μs
 $T_C = +25^\circ\text{C}$, $V_{DD} = 10\text{ V dc}$ 200 μs
 $T_C = +25^\circ\text{C}$, $V_{DD} = 15\text{ V dc}$ 202 μs

Minimum output pulse width, Q or \bar{Q} (t_{W3}):

Device type 01:
 $C_X = 0.1\ \mu\text{F}$, $R_X = 100\ \text{k}\Omega$
 $T_C = +25^\circ\text{C}$, $V_{DD} = 5\text{ V dc}$ 10.5 ms
 $T_C = +25^\circ\text{C}$, $V_{DD} = 10\text{ V dc}$ 10.6 ms
 $T_C = +25^\circ\text{C}$, $V_{DD} = 15\text{ V dc}$ 10.6 ms
 Device type 02:
 $C_X = 0.1\ \mu\text{F}$, $R_X = 100\ \text{k}\Omega$
 $T_C = +25^\circ\text{C}$, $V_{DD} = 5\text{ V dc}$ 9.3 ms
 $T_C = +25^\circ\text{C}$, $V_{DD} = 10\text{ V dc}$ 9.4 ms
 $T_C = +25^\circ\text{C}$, $V_{DD} = 15\text{ V dc}$ 9.5 ms

Minimum output pulse width, Q or \bar{Q} (t_{W4}):

Device type 01:
 $C_X = 10\ \mu\text{F}$, $R_X = 100\ \text{k}\Omega$
 $T_C = +25^\circ\text{C}$, $V_{DD} = 5\text{ V dc}$ 1.06 s
 $T_C = +25^\circ\text{C}$, $V_{DD} = 10\text{ V dc}$ 1.06 s
 $T_C = +25^\circ\text{C}$, $V_{DD} = 15\text{ V dc}$ 1.07 s
 Device type 02:
 $C_X = 10\ \mu\text{F}$, $R_X = 100\ \text{k}\Omega$
 $T_C = +25^\circ\text{C}$, $V_{DD} = 5\text{ V dc}$ 0.91 s
 $T_C = +25^\circ\text{C}$, $V_{DD} = 10\text{ V dc}$ 0.92 s
 $T_C = +25^\circ\text{C}$, $V_{DD} = 15\text{ V dc}$ 0.93 s

Minimum retrigger time (t_{rr}):

Device types 01 and 02:
 $C_X = 0.1\ \mu\text{F}$, $R_X = 100\ \text{k}\Omega$
 $T_C = +25^\circ\text{C}$, $V_{DD} = 5\text{ V dc}$ 0 ns
 $T_C = +25^\circ\text{C}$, $V_{DD} = 10\text{ V dc}$ 0 ns
 $T_C = +25^\circ\text{C}$, $V_{DD} = 15\text{ V dc}$ 0 ns

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90557
		REVISION LEVEL D	SHEET 3

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.
 MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.
 MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at <http://quicksearch.dla.mil> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094).

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein. Product built to this drawing that is produced by a Qualified Manufacturer Listing (QML) certified and qualified manufacturer or a manufacturer who has been granted transitional certification to MIL-PRF-38535 may be processed as QML product in accordance with the manufacturers approved program plan and qualifying activity approval in accordance with MIL-PRF-38535. This QML flow as documented in the Quality Management (QM) plan may make modifications to the requirements herein. These modifications shall not affect form, fit, or function of the device. These modifications shall not affect the PIN as described herein. A "Q" or "QML" certification mark in accordance with MIL-PRF-38535 is required to identify when the QML flow option is used.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535, appendix A and herein.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.2 herein.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.3 Truth table. The truth table shall be as specified on figure 2.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90557
		REVISION LEVEL D	SHEET 4

3.2.4 Logic diagram. The logic diagram shall be as specified on figure 3.

3.2.5 Switching waveforms and test circuit. The switching waveforms and test circuit shall be as specified on figure 4.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full case operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-PRF-38535, appendix A. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device.

3.5.1 Certification/compliance mark. A compliance indicator "C" shall be marked on all non-JAN devices built in compliance to MIL-PRF-38535, appendix A. The compliance indicator "C" shall be replaced with a "Q" or "QML" certification mark in accordance with MIL-PRF-38535 to identify when the QML flow option is used.

3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6 herein). The certificate of compliance submitted to DLA Land and Maritime -VA prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-PRF-38535, appendix A and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change. Notification of change to DLA Land and Maritime -VA shall be required for any change that affects this drawing.

3.9 Verification and review. DLA Land and Maritime, DLA Land and Maritime's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90557
		REVISION LEVEL D	SHEET 5

TABLE I. Electrical performance characteristics.

Test	Symbol	Test conditions -55°C ≤ T _C ≤ +125°C unless otherwise specified	Device type	Group A subgroups	Limits		Unit	
					Min	Max		
Quiescent supply current	I _{DD}	V _{DD} = 5.0 V V _{IN} = 0.0 V or V _{DD} 1/	All	1, 3		5.0	μA	
				2		150		
		V _{DD} = 10 V V _{IN} = 0.0 V or V _{DD} 1/	All	1, 3		10		
				2		300		
		V _{DD} = 15 V V _{IN} = 0.0 V or V _{DD} 1/	All	1, 3		20		
				2		600		
		V _{DD} = 20 V V _{IN} = 0.0 V or V _{DD} 2/	01	1, 3		100		
				2		3000		
Low level output voltage	V _{OL}	V _{IN} = 0.0 V or V _{DD} I _{OL} < 1 μA	V _{DD} = 5.0 V 1/	All	1, 2, 3		0.05	V
			V _{DD} = 10 V 1/	All	1, 2, 3		0.05	
			V _{DD} = 15 V	All	1, 2, 3		0.05	
High level output voltage	V _{OH}	V _{IN} = 0.0 V or V _{DD} I _{OH} < 1 μA	V _{DD} = 5.0 V 1/	All	1, 2, 3	4.95		V
			V _{DD} = 10 V 1/	All	1, 2, 3	9.95		
			V _{DD} = 15 V	All	1, 2, 3	14.95		
Low level input voltage	V _{IL}	V _{DD} = 5.0 V V _{OUT} = 0.5 V or 4.5 V	All	1, 2, 3			1.5	V
		V _{DD} = 10 V V _{OUT} = 1.0 V or 9.0 V 1/	All	1, 2, 3			3.0	
		V _{DD} = 15 V V _{OUT} = 1.5 V or 13.5 V	All	1, 2, 3			4.0	
High level input voltage	V _{IH}	V _{DD} = 5.0 V V _{OUT} = 0.5 V or 4.5 V	All	1, 2, 3	3.5			V
		V _{DD} = 10 V V _{OUT} = 1.0 V or 9.0 V 1/	All	1, 2, 3	7.0			
		V _{DD} = 15 V V _{OUT} = 1.5 V or 13.5 V	All	1, 2, 3	11.0			
Low level output current	I _{OL}	V _{DD} = 5.0 V 3/ V _{OUT} = 0.4 V V _{IN} = 0.0 V or V _{DD}	All	1	0.51		mA	
				2	0.36			
				3	0.64			
		V _{DD} = 10 V 1/ V _{OUT} = 0.5 V V _{IN} = 0.0 V or V _{DD}	All	1	1.3			
				2	0.9			
				3	1.6			
		V _{DD} = 15 V 1/ V _{OUT} = 1.5 V V _{IN} = 0.0 V or V _{DD}	All	1	3.4			
				2	2.4			
				3	4.2			

See footnotes at end of table.

**STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

5962-90557

REVISION LEVEL
D

SHEET
6

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Test conditions -55°C ≤ T _C ≤ +125°C unless otherwise specified	Device type	Group A subgroups	Limits		Unit
					Min	Max	
High level output current	I _{OH}	V _{DD} = 5.0 V <u>3</u> / V _{OUT} = 4.6 V V _{IN} = 0.0 V or V _{DD}	01	1	-0.51		mA
				2	-0.36		
				3	-0.64		
		V _{DD} = 5.0 V V _{OUT} = 4.6 V V _{IN} = 0.0 V or V _{DD}	02	1	-0.51		mA
				2	-0.36		
				3	-0.64		
		V _{DD} = 5.0 V <u>3</u> / V _{OUT} = 2.5 V V _{IN} = 0.0 V or V _{DD}	01	1	-1.6		mA
				2	-1.15		
				3	-2.0		
		V _{DD} = 5.0 V V _{OUT} = 2.5 V V _{IN} = 0.0 V or V _{DD}	02	1	-2.4		mA
				2	-1.7		
				3	-3.0		
		V _{DD} = 10 V <u>1</u> / V _{OUT} = 9.5 V V _{IN} = 0.0 V or V _{DD}	All	1	-1.3		mA
				2	-0.9		
3	-1.60						
V _{DD} = 15 V <u>1</u> / V _{OUT} = 13.5 V V _{IN} = 0.0 V or V _{DD}	All	1	-3.4		mA		
		2	-2.4				
		3	-4.2				
Input current	I _{IN}	V _{DD} = 18 V	01	1, 3		±0.1	μA
				2		±1.0	
		V _{DD} = 15 V	02	1, 3		±0.1	
				2		±1.0	
Input capacitance	C _{IN}	V _{IN} = 0 V See 4.3.1c	All	4		7.5	pF
Functional test		See 4.3.1d	All	7, 8			

See footnotes at end of table.

**STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
D

5962-90557

SHEET
7

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Test conditions -55°C ≤ T _C ≤ +125°C unless otherwise specified	Device type	Group A subgroups	Limits		Unit	
					Min	Max		
Transition time	t _{THL} , t _{TLH}	R _L = 200 kΩ C _L = 50 pF minimum t _r , t _f = 20 ns See figure 4	V _{DD} = 5 V	All	9	1.5	200	ns
				01	10, 11	1.5	260	
				02	10, 11	1.5	300	
			V _{DD} = 10 V 4/	All	9	1.5	100	
				01	10, 11	1.5	130	
				02	10, 11	1.5	150	
			V _{DD} = 15 V 4/	All	9	1.5	80	
				01	10, 11	1.5	104	
				02	10, 11	1.5	120	
Propagation delay time, +TR to Q, -TR to Q, +TR to \bar{Q} -TR to \bar{Q}	t _{PHL1} , t _{PLH1}	R _L = 200 kΩ C _L = 50 pF minimum t _r , t _f = 20 ns See figure 4	V _{DD} = 5 V	All	9	1.5	600	ns
				01	10, 11	1.5	780	
				02	10, 11	1.5	900	
			V _{DD} = 10 V 4/	All	9	1.5	300	
				01	10, 11	1.5	390	
				02	10, 11	1.5	450	
			V _{DD} = 15 V 4/	All	9	1.5	220	
				01	10, 11	1.5	286	
				02	10, 11	1.5	330	
Propagation delay time, RESET to Q, RESET to \bar{Q}	t _{PHL2}	R _L = 200 kΩ C _L = 50 pF minimum t _r , t _f = 20 ns See figure 4	V _{DD} = 5 V	All	9	1.5	500	ns
				01	10, 11	1.5	650	
				02	10, 11	1.5	750	
			V _{DD} = 10 V 4/	All	9	1.5	250	
				01	10, 11	1.5	325	
				02	10, 11	1.5	375	
			V _{DD} = 15 V 4/	All	9	1.5	190	
				01	10, 11	1.5	247	
				02	10, 11	1.5	285	

1/ For device type 01, this parameter is guaranteed, if not tested, to the limits specified in table I.

2/ At -55°C, this test is performed with V_{DD} = 18 V dc.

3/ For device type 01, the I_{OL} and I_{OH} tests are tested 100 percent at T_C = +25°C, and are guaranteed, if not tested, for T_C = -55°C and T_C = +125°C.



4/ This parameter is guaranteed, if not tested, to the limits specified in table I.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90557
		REVISION LEVEL D	SHEET 8

Device types	01 and 02
Case outline	E
Terminal number	Terminal symbol
1	C _{X1}
2	R _X C _{X1}
3	RESET1
4	+TR1
5	-TR1
6	Q1
7	$\overline{Q1}$
8	V _{SS}
9	$\overline{Q2}$
10	Q2
11	-TR2
12	+TR2
13	RESET2
14	R _X C _{X2}
15	C _{X2}
16	V _{DD}

NOTE: C_{X1}, V_{SS}, and C_{X2} are electrically connected internally.

FIGURE 1. Terminal connections.

Device types 01 and 02				
Inputs			Outputs	
RESETn	+TRn	-TRn	Qn	\overline{Qn}
L	X	X	L	H
X	H	X	L	H
X	X	L	L	H
H	↑	H		
H	L	↓		

H = High level (steady-state)
L = Low level (steady-state)
X = Irrelevant (include transitions)

 = One high level pulse


 = One low level pulse

↓ = Transition, high to low
↑ = Transition, low to high

FIGURE 2. Truth table.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90557
		REVISION LEVEL D	SHEET 9

Device types 01 and 02

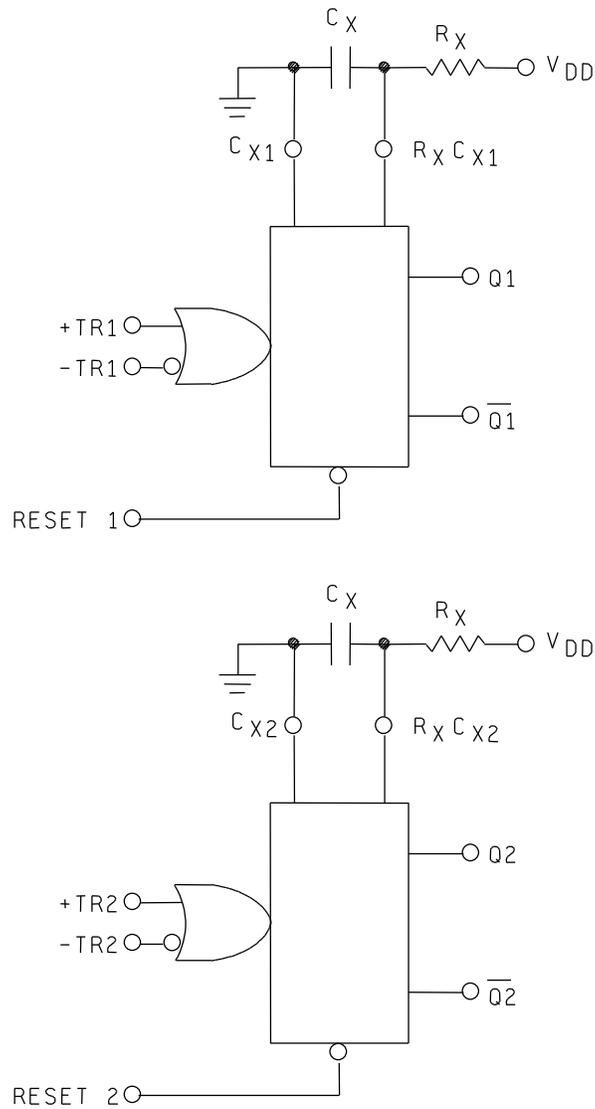

NOTES:

C_{X1} and C_{X2} are internally connected to V_{SS} .
 R_{Xn} and C_{Xn} are external components.

FIGURE 3. Logic diagram.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90557
		REVISION LEVEL D	SHEET 10

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

- a. Burn-in test, method 1015 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.
 - (2) $T_A = +125^{\circ}\text{C}$, minimum.
- b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)
Interim electrical parameters (method 5004)	----
Final electrical test parameters (method 5004)	1*, 2, 3, 9
Group A test requirements (method 5005)	1, 2, 3, 4, 7, 8, 9, 10**, 11**
Groups C and D end-point electrical parameters (method 5005)	1, 2, 3

* PDA applies to subgroup 1.

** Subgroups 10 and 11, if not tested, are guaranteed to the limits in table I.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. Subgroups 5 and 6 in table I, method 5005 of MIL-STD-883 shall be omitted.
- c. Subgroup 4 (C_{IN} measurement) shall be measured only for the initial test and after process or design changes which may affect input capacitance. Capacitance shall be measured between the designated terminal and GND at a frequency of 1 MHz. Test all applicable pins on five devices with zero failures.
- d. Subgroups 7 and 8 shall include verification of the truth table and as specified on table I.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90557
		REVISION LEVEL D	SHEET 12

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.
 - (2) $T_A = +125^{\circ}\text{C}$, minimum.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535, appendix A.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished using DD Form 1692, Engineering Change Proposal.

6.4 Record of users. Military and industrial users shall inform DLA Land and Maritime when a system application requires configuration control and the applicable SMD to that system. DLA Land and Maritime will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DLA Land and Maritime-VA, telephone (614) 692-8108.

6.5 Comments. Comments on this drawing should be directed to DLA Land and Maritime-VA, Columbus, Ohio 43218-3990, or telephone (614) 692-0540.

6.6 Approved sources of supply. Approved sources of supply are listed in MIL-HDBK-103 and QML-38535. The vendors listed in MIL-HDBK-103 and QML-38535 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DLA Land and Maritime-VA.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-90557
		REVISION LEVEL D	SHEET 13

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 16-05-25

Approved sources of supply for SMD 5962-90557 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DLA Land and Maritime-VA. This information bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535. DLA Land and Maritime maintains an online database of all current sources of supply at <http://www.landandmaritime.dla.mil/Programs/Smcr/>.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
5962-9055701EA	01295	CD14538BF3A
5962-9055702EA	<u>3/</u>	14538B/BEAJC

1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.

2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

3/ Not available from an approved source of supply.

Vendor CAGE
number

Vendor name
and address

01295

Texas Instruments Inc.
Semiconductor Group
8505 Forest Ln.
P.O. Box 660199
Dallas, TX 75243

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.