

REVISIONS			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Update boilerplate to MIL-PRF-38535 requirements. Editorial changes throughout. – LTG	03-01-24	Thomas M. Hess
B	Update test conditions for high level output voltage ( $V_{OH}$ ) and low level output voltage ( $V_{OL}$ ) in the table I. Correct input pin $\overline{OE}$ to $\overline{OE\bar{A}}$ or $\overline{OE\bar{B}}$ in the table I. Update boilerplate paragraphs to current MIL-PRF-38535 requirements. – MAA.	10-08-13	Thomas M. Hess
C	Update boilerplate paragraphs to the current MIL-PRF-38535 requirements. Delete class M requirement throughout. - LTG	16-10-25	Thomas M. Hess
D	Update boilerplate paragraphs to the current MIL-PRF-38535 requirements. – TTM	22-10-26	Muhammad A. Akbar



THE ORIGINAL FIRST SHEET OF THIS DRAWING HAS BEEN REPLACED.

Revision Status of Sheets

REV																																							
SHEET																																							
REV	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D																		
SHEET	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19																				


PMIC N/A

<b>STANDARD MICROCIRCUIT DRAWING</b>  THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE  AMSC N/A	PREPARED BY Thanh V. Nguyen		<b>DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990</b> <a href="https://www.dla.mil/LandandMaritime">https://www.dla.mil/LandandMaritime</a>			
	CHECKED BY Thanh V. Nguyen					
	APPROVED BY Monica L. Poelking		<b>MICROCIRCUIT, DI ADVANCED BIPOLAR CMOS, 8-BIT TO 9-BIT PARITY BUS TRANSCEIVER WITH THREE-STATE OUTPUTS, TTL COMPATIBLE INPUTS, GITAL, MONOLITHIC SILICON</b>			
	DRAWING APPROVAL DATE 96-01-30					
	REVISION LEVEL D		SIZE A	CAGE CODE <b>67268</b>	<b>5962-96746</b>	
SHEET 1 OF 19						

1. SCOPE

1.1 Scope. This drawing documents two product assurance class levels consisting of high reliability (device class Q) and space application (device class V). A choice of case outlines and lead finishes are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of Radiation Hardness Assurance (RHA) levels is reflected in the PIN.

1.2 PIN. The PIN is as shown in the following examples.

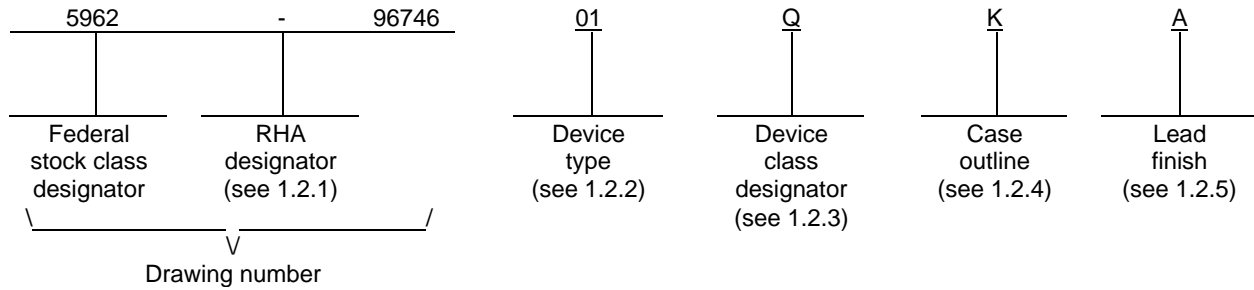

1.2.1 RHA designator. Device classes Q and V RHA marked devices meet the MIL-PRF-38535 specified RHA levels and are marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device type(s). The device type(s) identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	54ABT853	8-bit to 9-bit parity bus transceiver with three-state outputs, TTL compatible inputs

1.2.3 Device class designator. The device class designator is a single letter identifying the product assurance level as follows:

<u>Device class</u>	<u>Device requirements documentation</u>
Q or V	Certification and qualification to MIL-PRF-38535

1.2.4 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
K	GDFP2-F24 or CDFP3-F24	24	Flat pack
L	GDIP3-T24 or CDIP4-T24	24	Dual-in-line
3	CQCC1-N28	28	Square leadless chip carrier

1.2.5 Lead finish. The lead finish is as specified in MIL-PRF-38535 for device classes Q and V.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>2</b>

1.3 Absolute maximum ratings. 1/ 2/ 3/

Supply voltage range ( $V_{CC}$ ) .....	-0.5 V dc to +7.0 V dc
DC input voltage range ( $V_{IN}$ )(except I/O ports) .....	-0.5 V dc to +7.0 V dc 4/
DC output voltage range in high or power-off state ( $V_{OUT}$ ) .....	-0.5 V dc to +5.5 V dc 4/
DC output current ( $I_{OL}$ ) (per output) .....	+96 mA
DC input clamp current ( $I_{IK}$ ) ( $V_{IN} < 0.0$ V) .....	-18 mA
DC output clamp current ( $I_{OK}$ ) ( $V_{OUT} < 0.0$ V) .....	-50 mA
Maximum power dissipation ( $P_D$ ).....	500 mW
Storage temperature range ( $T_{STG}$ ).....	-65°C to +150°C
Lead temperature (soldering, 10 seconds).....	+300°C
Thermal resistance, junction-to-case ( $\theta_{JC}$ ) .....	See MIL-STD-1835
Junction temperature ( $T_J$ ).....	+175°C

1.4 Recommended operating conditions. 2/ 3/

Supply voltage range ( $V_{CC}$ ) .....	+4.5 V dc to +5.5 V dc
Minimum high level input voltage ( $V_{IH}$ ) .....	+2.0 V
Maximum low level input voltage ( $V_{IL}$ ) .....	+0.8 V
Input voltage range ( $V_{IN}$ ) .....	+0.0 V dc to $V_{CC}$
Output voltage range ( $V_{OUT}$ ) .....	+0.0 V dc to $V_{CC}$
Maximum high level output voltage, $\overline{ERR}$ ( $V_{OH}$ ) .....	+5.5 V dc
Maximum high level output current, except $\overline{ERR}$ ( $I_{OH}$ ).....	-24 mA
Maximum low level output current ( $I_{OL}$ ) .....	+48 mA
Maximum input rise or fall rate ( $\Delta t/\Delta V$ )(outputs enabled) .....	10 ns/V
Power-up ramp rate ( $\Delta t/\Delta V_{CC}$ ).....	200 $\mu$ s/V
Case operating temperature range ( $T_C$ ) .....	-55°C to +125°C

- 1/ Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.
- 2/ Unless otherwise noted, all voltages are referenced to GND.
- 3/ The limits for the parameters specified herein shall apply over the full specified  $V_{CC}$  range and case temperature range of -55°C to +125°C. Unused inputs must be held high or low.
- 4/ The input and output negative voltage ratings may be exceeded provided that the input and output clamp current ratings are observed.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>3</b>

## 2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

### DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

### DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.

MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

### DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.

MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at <https://quicksearch.dla.mil/>.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3. REQUIREMENTS

3.1 Item requirements. The individual item requirements for device classes Q and V shall be in accordance with MIL-PRF-38535 as specified herein, or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein for device classes Q and V.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.4 herein.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.3 Truth tables. The truth tables shall be as specified on figure 2.

3.2.4 Logic diagram. The logic diagram shall be as specified on figure 3.

3.2.5 Ground bounce test circuit and waveforms. The ground bounce test circuit and waveforms shall be as specified on figure 4.

3.2.6 Switching waveforms and test circuit. The switching waveforms and test circuit shall be as specified on figure 5.

3.3 Electrical performance characteristics and postirradiation parameter limits. Unless otherwise specified herein, the electrical performance characteristics and postirradiation parameter limits are as specified in table I and shall apply over the full case operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>4</b>

3.5 Marking. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device. For RHA product using this option, the RHA designator shall still be marked. Marking for device classes Q and V shall be in accordance with MIL-PRF-38535.

3.5.1 Certification/compliance mark. The certification mark for device classes Q and V shall be a "QML" or "Q" as required in MIL-PRF-38535.

3.6 Certificate of compliance. For device classes Q and V, a certificate of compliance shall be required from a QML-38535 listed manufacturer in order to supply to the requirements of this drawing (see 6.6.1 herein). The certificate of compliance submitted to DLA Land and Maritime-VA prior to listing as an approved source of supply for this drawing shall affirm that the manufacturer's product meets, for device classes Q and V, the requirements of MIL-PRF-38535 and herein.

3.7 Certificate of conformance. A certificate of conformance as required for device classes Q and V in MIL-PRF-38535 shall be provided with each lot of microcircuits delivered to this drawing.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>5</b>

TABLE I. Electrical performance characteristics.

Test and MIL-STD-883 test method <u>1/</u>	Symbol	Test conditions <u>2/</u> -55°C ≤ T <sub>C</sub> ≤ +125°C +4.5 V ≤ V <sub>CC</sub> ≤ +5.5 V unless otherwise specified		V <sub>CC</sub>	Group A subgroups	Limits <u>3/</u>		Unit
						Min	Max	
Negative input clamp voltage 3022	V <sub>IK</sub>	For input under test I <sub>IN</sub> = -18 mA		4.5 V	1, 2, 3		-1.2	V
High level output voltage (except $\overline{\text{ERR}}$ ) 3006	V <sub>OH</sub>	For all inputs affecting output under test V <sub>IN</sub> = V <sub>IH</sub> = 2.0 V or V <sub>IL</sub> = 0.8 V	I <sub>OH</sub> = -3.0 mA	4.5 V	1, 2, 3	2.5		V
				5.0 V	1, 2, 3	3.0		
			I <sub>OH</sub> = -24 mA	4.5 V	1, 2, 3	2.0		
Low level output voltage 3007	V <sub>OL</sub>	For all inputs affecting output under test, V <sub>IN</sub> = V <sub>IH</sub> = 2.0 V or V <sub>IL</sub> = 0.8 V I <sub>OL</sub> = +24 mA		4.5 V	1, 2, 3		0.55	V
Output current high (ERR)	I <sub>OH</sub>	V <sub>OH</sub> = 5.5 V		4.5 V	1, 2, 3		50	μA
Input current high 3010	I <sub>IH</sub>	For input under test V <sub>IN</sub> = V <sub>CC</sub>	Control inputs	5.5 V	1, 2, 3		+1.0	μA
			A or B ports				+100	
Input current low 3009	I <sub>IL</sub>	For input under test V <sub>IN</sub> = GND	Control inputs	5.5 V	1, 2, 3		-1.0	μA
			A or B ports				-100	
Three-state output current, power up	I <sub>OZPU</sub>	V <sub>OUT</sub> = 0.5 V to 2.7 V $\overline{\text{OE}}\text{A}$ or $\overline{\text{OE}}\text{B}$ = Don't care		0.0 V to 2.1 V	1		±50	μA
Three-state output current, power down	I <sub>OZPD</sub>			2.1 V to 0.0 V	1		±50	
Three-state output leakage current high 3021	I <sub>OZH</sub> <u>4/</u>	For control input affecting output under test, V <sub>IN</sub> = V <sub>IH</sub> = 2.0 V or V <sub>IL</sub> = 0.8 V V <sub>OUT</sub> = 2.7 V		5.5 V	1, 2, 3		10	μA
Three-state output leakage current low 3020	I <sub>OZL</sub> <u>4/</u>	For control input affecting output under test, V <sub>IN</sub> = V <sub>IH</sub> = 2.0 V or V <sub>IL</sub> = 0.8 V V <sub>OUT</sub> = 0.5 V		5.5 V	1, 2, 3		-10	μA
Off-state leakage current	I <sub>OFF</sub>	For input or output under test V <sub>IN</sub> or V <sub>OUT</sub> = 4.5 V All other pins at 0.0 V		0.0 V	1		±100	μA
High-state leakage current	I <sub>CEX</sub>	For output under test, V <sub>OUT</sub> = 5.5 V Outputs at high logic state		5.5 V	1, 2, 3		50	μA
Output current 3011	I <sub>O</sub> <u>5/</u>	V <sub>OUT</sub> = 2.5 V		5.5 V	1, 2, 3	-50	-200	mA

See footnotes at end of table.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>6</b>

TABLE I. Electrical performance characteristics - Continued.

Test and MIL-STD-883 test method <u>1/</u>	Symbol	Test conditions <u>2/</u> -55°C ≤ T <sub>C</sub> ≤ +125°C +4.5 V ≤ V <sub>CC</sub> ≤ +5.5 V unless otherwise specified			V <sub>CC</sub>	Group A subgroups	Limits <u>3/</u>		Unit
							Min	Max	
Quiescent supply current, outputs high 3005	I <sub>CCH</sub>	For all inputs, V <sub>IN</sub> = V <sub>CC</sub> or GND I <sub>OUT</sub> = 0 A, A or B ports			5.5 V	1		250	μA
								450	
Quiescent supply current, outputs low 3005	I <sub>CCL</sub>				5.5 V	1		38	mA
								38	
Quiescent supply current, outputs disabled 3005	I <sub>CCZ</sub>				5.5 V	1		250	μA
								450	
Quiescent supply current delta, TTL input level 3005	ΔI <sub>CC</sub> <u>6/</u>	For input under test, V <sub>IN</sub> = 3.4 V For all other inputs V <sub>IN</sub> = V <sub>CC</sub> or GND	Data Inputs	Outputs enabled	5.5 V	1, 2, 3		1.5	mA
				Outputs disabled				50	
		Control inputs		5.5 V	1, 2, 3		1.5	mA	
Input capacitance 3012	C <sub>IN</sub>	T <sub>A</sub> = +25°C See 4.4.1c V <sub>IN</sub> = 2.5 V or 0.5 V	Control inputs		5.0 V	4		16	pF
Output capacitance 3012	C <sub>I/O</sub>	T <sub>A</sub> = +25°C See 4.4.1c V <sub>OUT</sub> = 2.5 V or 0.5 V	A or B ports		5.0 V	4		20	pF
Low level ground bounce noise	V <sub>OLP</sub> <u>7/</u>	V <sub>IH</sub> = 3.0 V, V <sub>IL</sub> = 0.0 V T <sub>A</sub> = +25°C See figure 4 See 4.4.1d			5.0 V	4		900	mV
Low level ground bounce noise	V <sub>OLV</sub> <u>7/</u>				5.0 V	4		-1300	mV
High level V <sub>CC</sub> bounce noise	V <sub>OHP</sub> <u>7/</u>				5.0 V	4		1700	mV
High level V <sub>CC</sub> bounce noise	V <sub>OHV</sub> <u>7/</u>				5.0 V	4		-500	mV
Functional test 3014	<u>8/</u>		V <sub>IH</sub> = 2.0 V, V <sub>IL</sub> = 0.8 V Verify output V <sub>O</sub> See 4.4.1b		4.5 V	7, 8	L	H	
Pulse duration	t <sub>w</sub>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	LE high or low		5.0 V	9	3.5		ns
					4.5 V and 5.5 V	10, 11	3.5		
			CLR low		5.0 V	9	4.0		
					4.5 V and 5.5 V	10, 11	4.0		

See footnotes at end of table.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>7</b>

TABLE I. Electrical performance characteristics - Continued.

Test and MIL-STD-883 test method <u>1/</u>	Symbol	Test conditions <u>2/</u> -55°C ≤ T <sub>c</sub> ≤ +125°C +4.5 V ≤ V <sub>cc</sub> ≤ +5.5 V unless otherwise specified	V <sub>cc</sub>	Group A subgroups	Limits <u>3/</u>		Unit
					Min	Max	
Setup time, high or low	t <sub>s</sub>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	B or PARITY before $\overline{LE}\downarrow$	5.0 V	9	9.4	ns
				4.5 V and 5.5 V	10, 11	10.2	
			$\overline{CLR}$ before $\overline{LE}\uparrow$	5.0 V	9	2.0	
				4.5 V and 5.5 V	10, 11	2.0	
Hold time, high or low	t <sub>h</sub>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	B or PARITY after $\overline{LE}\downarrow$	5.0 V	9	0.0	ns
				4.5 V and 5.5 V	10, 11	0.0	
			$\overline{CLR}$ after $\overline{LE}\uparrow$	5.0 V	9	3.0	
				4.5 V and 5.5 V	10, 11	3.0	
Propagation delay time, A <sub>n</sub> or B <sub>n</sub> to B <sub>n</sub> or A <sub>n</sub> 3003	t <sub>PLH1</sub> <u>9/</u>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	5.0 V	9	1.2	4.8	ns
			4.5 V and 5.5 V	10, 11	1.2	6.4	
	t <sub>PHL1</sub> <u>9/</u>		5.0 V	9	1.0	4.8	
			4.5 V and 5.5 V	10, 11	1.0	5.4	
Propagation delay time, A <sub>n</sub> to PARITY 3003	t <sub>PLH2</sub> <u>9/</u>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	5.0 V	9	2.1	9.5	ns
			4.5 V and 5.5 V	10, 11	2.1	13.3	
	t <sub>PHL2</sub> <u>9/</u>		5.0 V	9	2.5	9.7	
			4.5 V and 5.5 V	10, 11	2.5	11.0	
Propagation delay time, $\overline{OE}A$ or $\overline{OE}B$ to PARITY 3003	t <sub>PLH3</sub> <u>9/</u>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	5.0 V	9	1.8	8.5	ns
			4.5 V and 5.5 V	10, 11	1.8	13.6	
	t <sub>PHL3</sub> <u>9/</u>		5.0 V	9	2.3	8.6	
			4.5 V and 5.5 V	10, 11	2.3	11.7	

See footnotes at end of table.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>8</b>



TABLE I. Electrical performance characteristics – Continued.

Test and MIL-STD-883 test method <u>1/</u>	Symbol	Test conditions <u>2/</u> -55°C ≤ T <sub>c</sub> ≤ +125°C +4.5 V ≤ V <sub>cc</sub> ≤ +5.5 V unless otherwise specified	V <sub>cc</sub>	Group A subgroups	Limits <u>3/</u>		Unit
					Min	Max	
Propagation delay time, $\overline{CLR}$ to $\overline{ERR}$ 3003	t <sub>PLH4</sub> <u>9/</u>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	5.0 V	9	1.0	5.5	ns
			4.5 V and 5.5 V	10, 11	1.0	6.3	
Propagation delay time, $\overline{LE}$ to $\overline{ERR}$ 3003	t <sub>PLH5</sub> <u>9/</u>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	5.0 V	9	1.8	5.1	ns
			4.5 V and 5.5 V	10, 11	1.8	6.1	
	5.0 V		9	1.0	5.8		
	4.5 V and 5.5 V		10, 11	1.0	6.7		
Propagation delay time, B <sub>n</sub> or PARITY to $\overline{ERR}$ 3003	t <sub>PLH6</sub> <u>9/</u>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	5.0 V	9	2.0	10.1	ns
			4.5 V and 5.5 V	10, 11	2.0	11.8	
	t <sub>PHL6</sub> <u>9/</u>		5.0 V	9	2.2	11.5	
	4.5 V and 5.5 V		10, 11	2.2	12.9		
Propagation delay time, output enable, $\overline{OE}A$ or $\overline{OE}B$ to A <sub>n</sub> , B <sub>n</sub> , or PARITY 3003	t <sub>PZH</sub> <u>9/</u>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	5.0 V	9	1.0	5.8	ns
			4.5 V and 5.5 V	10, 11	1.0	8.8	
	t <sub>PZL</sub> <u>9/</u>		5.0 V	9	1.5	5.8	
	4.5 V and 5.5 V		10, 11	1.5	9.8		
Propagation delay time, output disable, $\overline{OE}A$ or $\overline{OE}B$ to A <sub>n</sub> , B <sub>n</sub> , or PARITY 3003	t <sub>PHZ</sub> <u>9/</u>	C <sub>L</sub> = 50 pF minimum R <sub>L</sub> = 500Ω See figure 5	5.0 V	9	1.8	7.3	ns
			4.5 V and 5.5 V	10, 11	1.8	9.5	
	t <sub>PLZ</sub> <u>9/</u>		5.0 V	9	2.1	7.2	
	4.5 V and 5.5 V		10, 11	2.1	8.2		

See footnotes at end of table.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>9</b>

TABLE I. Electrical performance characteristics – Continued.

- 1/ For tests not listed in the referenced MIL-STD-883 (e.g.  $\Delta I_{CC}$ ), utilize the general test procedure of 883 under the conditions listed herein.
- 2/ Each input/output, as applicable, shall be tested at the specified temperature, for the specified limits, to the tests in table I herein. Output terminals not designated shall be high level logic, low level logic, or open, except for all  $I_{CC}$  and  $\Delta I_{CC}$  tests, where the output terminals shall be open. When performing these tests, the current meter shall be placed in the circuit such that all current flows through the meter. For input terminals not designated,  $V_{IN} = GND$  or  $V_{IN} \geq 3.0 V$ .
- 3/ For negative and positive voltage and current values, the sign designates the potential difference in reference to GND and the direction of current flow, respectively, and the absolute value of the magnitude, not the sign, is relative to the minimum and maximum limits, as applicable, listed herein. All devices shall meet or exceed the limits specified in table I at  $4.5 V \leq V_{CC} \leq 5.5 V$ .
- 4/ The parameters  $I_{OZH}$  and  $I_{OZL}$  include the input leakage current. This test shall be guaranteed, if not tested, to the limits specified in table I herein, when performed with control inputs that affect the state of the output under test at  $V_{IH} = 2.0 V$  or  $V_{IL} = 0.8 V$ .
- 5/ Not more than one output should be tested at one time, and the duration of the test condition should not exceed one second.
- 6/ This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than 0 V or  $V_{CC}$ . This test may be performed either one input at a time (preferred method) or with all input pins simultaneously at  $V_{IN} = V_{CC} - 2.1 V$  (alternate method). When the test is performed using the alternate test method, the maximum limit is equal to the number of inputs at a high TTL input level times  $\Delta I_{CC}$  maximum limits, and the preferred method and limits are guaranteed.
- 7/ This test is for qualification only. Ground and  $V_{CC}$  bounce tests are performed on a non-switching (quiescent) output and are used to measure the magnitude of induced noise caused by other simultaneously switching outputs. The test is performed on a low noise bench test fixture. For the device under test, all outputs shall be loaded with 500 $\Omega$  of load resistance and a minimum of 50 pF of load capacitance (see figure 4). Only chip capacitors and resistors shall be used. The output load components shall be located as close as possible to the device outputs. It is suggested, that whenever possible, this distance be kept to less than 0.25 inches. Decoupling capacitors shall be placed in parallel from  $V_{CC}$  to ground. The values of these decoupling capacitors shall be determined by the device manufacturer. The low and high level ground and  $V_{CC}$  bounce noise is measured at the quiet output using a 1 GHz minimum bandwidth oscilloscope with a 50 $\Omega$  input impedance.  
  
The device inputs shall be conditioned such that all outputs are at a high nominal  $V_{OH}$  level. The device inputs shall then be conditioned such that they switch simultaneously and the output under test remains at  $V_{OH}$  as all other outputs possible are switched from  $V_{OH}$  to  $V_{OL}$ .  $V_{OHV}$  and  $V_{OHP}$  are then measured from the nominal  $V_{OH}$  level to the largest negative and positive peaks, respectively (see figure 4). This is then repeated with the same outputs not under test switching from  $V_{OL}$  to  $V_{OH}$ .  
  
The device inputs shall be conditioned such that all outputs are at a low nominal  $V_{OL}$  level. The device inputs shall then be conditioned such that they switch simultaneously and the output under test remains at  $V_{OL}$  as all other outputs possible are switched from  $V_{OL}$  to  $V_{OH}$ .  $V_{OLP}$  and  $V_{OLV}$  are then measured from the nominal  $V_{OL}$  level to the largest positive and negative peaks, respectively (see figure 4). This is then repeated with the same outputs not under test switching from  $V_{OH}$  to  $V_{OL}$ .
- 8/ Tests shall be performed in sequence, attributes data only. Functional tests shall include the truth tables and other logic patterns used for fault detection. The test vectors used to verify the truth tables shall, at a minimum, test all functions of each input and output. All possible input to output logic patterns per function shall be guaranteed, if not tested, to the truth tables in figure 2 herein. Functional tests shall be performed in sequence as approved by the qualifying activity on qualified devices. After incorporating allowable tolerances per MIL-STD-883,  $V_{IL} = 0.4 V$  and  $V_{IH} = 2.4 V$ . For outputs,  $L \leq 0.8 V$ ,  $H \geq 2.0 V$ .
- 9/ For propagation delay tests, test all functions of each input and output.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>10</b>

Device type	01	
Case outlines	K, L	3
Terminal number	Terminal symbol	
1	$\overline{OE}A$	NC
2	A1	$\overline{OE}A$
3	A2	A1
4	A3	A2
5	A4	A3
6	A5	A4
7	A6	A5
8	A7	NC
9	A8	A6
10	$\overline{ERR}$	A7
11	$\overline{CLR}$	A8
12	GND	$\overline{ERR}$
13	$\overline{LE}$	$\overline{CLR}$
14	$\overline{OEB}$	GND
15	PARITY	NC
16	B8	$\overline{LE}$
17	B7	$\overline{OEB}$
18	B6	PARITY
19	B5	B8
20	B4	B7
21	B3	B6
22	B2	NC
23	B1	B5
24	V <sub>cc</sub>	B4
25		B3
26		B2
27		B1
28		V <sub>cc</sub>

NC = No internal connection

Pin description	
Terminal symbol	Description
An (n = 1 to 8)	Data inputs/outputs, A port
Bn (n = 1 to 8)	Data inputs/outputs, B port
$\overline{OE}A/\overline{OEB}$	Output enable control inputs
$\overline{ERR}$	Parity error output (open collector)
$\overline{CLR}$	Clear control input
$\overline{LE}$	Latch enable control input
PARITY	Parity odd output

FIGURE 1. Terminal connections.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>11</b>

Function table

Inputs						Outputs and I/Os				Function
$\overline{OEB}$	$\overline{OEA}$	$\overline{CLR}$	$\overline{LE}$	An $\Sigma$ OF H	Bn 1/ $\Sigma$ OF H	An	Bn	PARITY	ERR 2/	
L	H	X	X	Odd	NA	NA	A	L	NA	A data to B bus and generate parity
				Even				H		
H	L	X	L	NA	Odd	B	NA	NA	H	B data to A bus and check parity
					Even				L	
H	L	H	H	NA	X	X	NA	NA	NC	Store error flag
X	X	L	H	X	X	X	NA	NA	H	Clear error flag register
H	H	H	H	X	X	Z	Z	Z	NC	Isolation 3/ (parity check)
		L	H	X					H	
		X	L	L Odd					H	
		X	L	H Even					L	
L	L	X	X	Odd	NA	NA	A	H	NA	A data to B bus and generate inverted parity
				Even				L		

H = High voltage level

L = Low voltage level

X = Irrelevant

Z = Disabled

NA = Not applicable

NC = No change

1/ Summation of high-level inputs includes PARITY along with Bn inputs.

2/ Output states shown assume the ERR output was previously high.

3/ In this mode, the ERR output (when clocked) shows inverted parity of the A bus.

Error-flag function table

Inputs		Internal to device	Output Pre-state	Output	Function
$\overline{CLR}$	$\overline{LE}$	Point P	$\overline{ERR}_{n-1}$ 4/	$\overline{ERR}$	
L	L	L	X	L	Pass
		H		H	
H	L	L	X	L	Sample
		X	L	L	
		H	H	H	
L	H	X	X	H	Clear
H	H	X	L	L	Store
			H	H	

4/ The state of the ERR output before any changes at CLR, LE, or point P.

FIGURE 2. Truth tables.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>12</b>


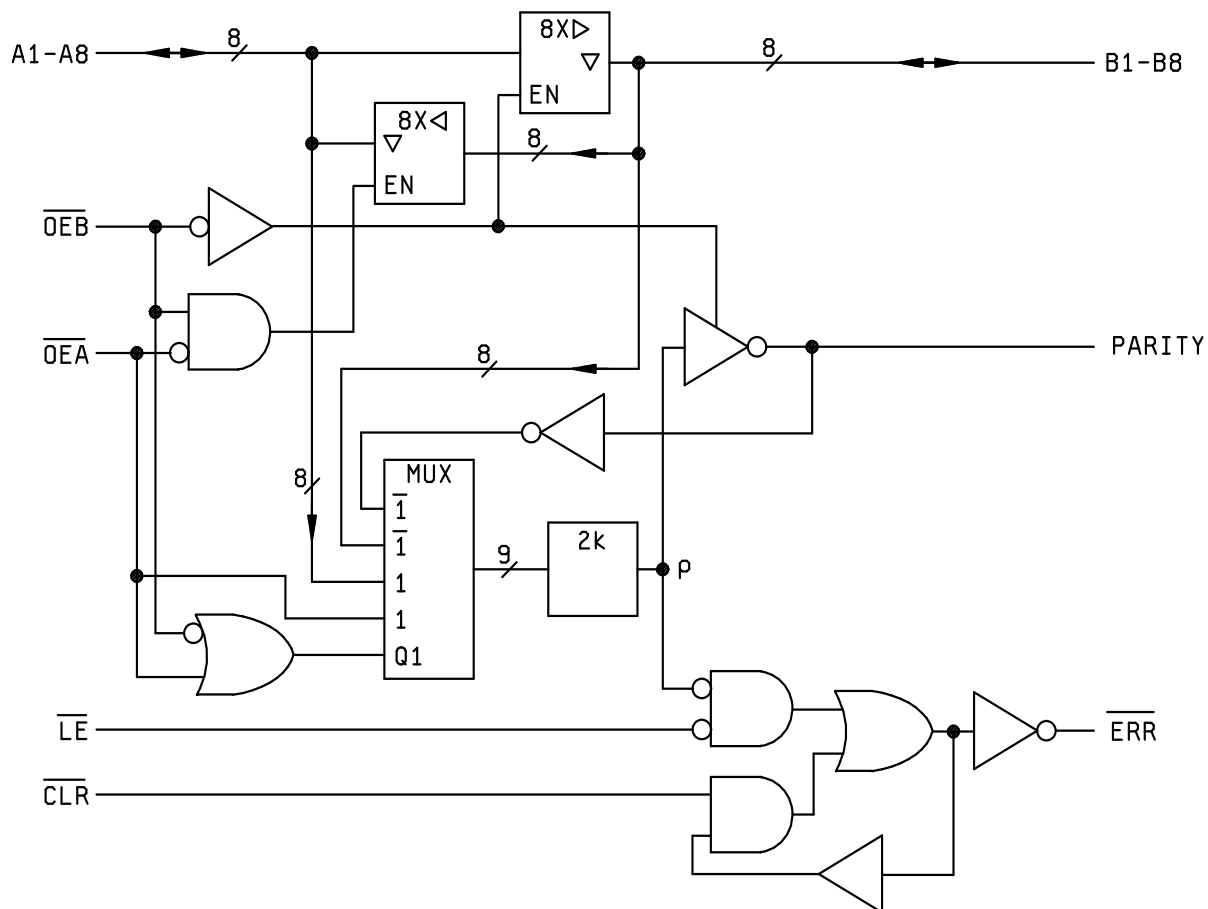


FIGURE 3. Logic diagram.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>13</b>

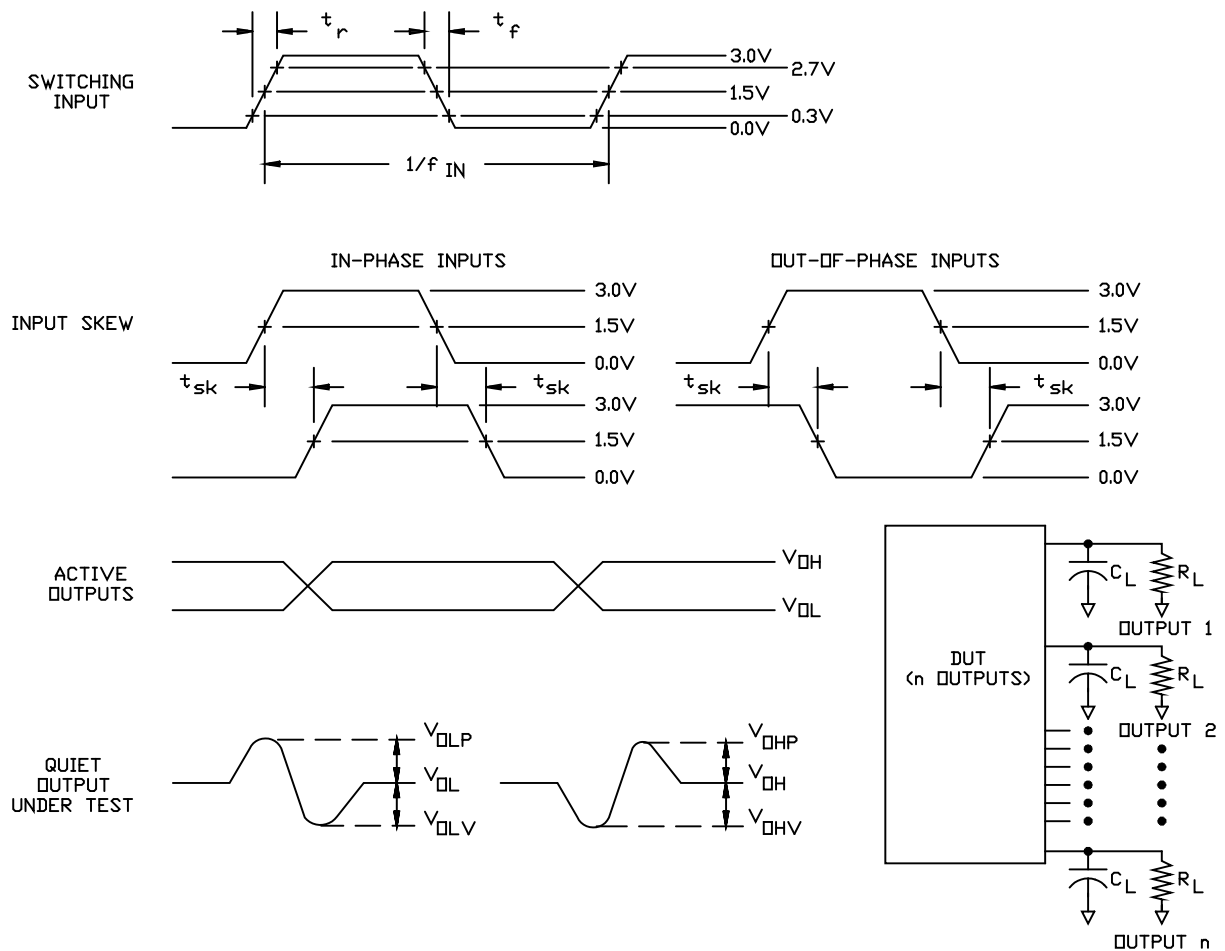

**NOTES:**

1.  $C_L$  includes a 47 pF chip capacitor (-0 percent, +20 percent) and at least 3 pF of equivalent capacitance from the test jig and probe.
2.  $R_L = 450\Omega \pm 1$  percent, chip resistor in series with a 50 $\Omega$  termination. For monitored outputs, the 50 $\Omega$  termination shall be the 50 $\Omega$  characteristic impedance of the coaxial connector to the oscilloscope.
3. Input signal to the device under test:
  - a.  $V_{IN} = 0.0$  V to 3.0 V; duty cycle = 50 percent;  $f_{IN} \geq 1$  MHz.
  - b.  $t_r, t_f = 3$  ns  $\pm 1.0$  ns. For input signal generators incapable of maintaining these values of  $t_r$  and  $t_f$ , the 3.0 ns limit may be increased up to 10 ns, as needed, maintaining the  $\pm 1.0$  ns tolerance and guaranteeing the results at 3.0 ns  $\pm 1.0$  ns; skew between any two switching inputs signals ( $t_{sk}$ ):  $\leq 250$  ps.

FIGURE 4. Ground bounce load circuit and waveforms.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>14</b>




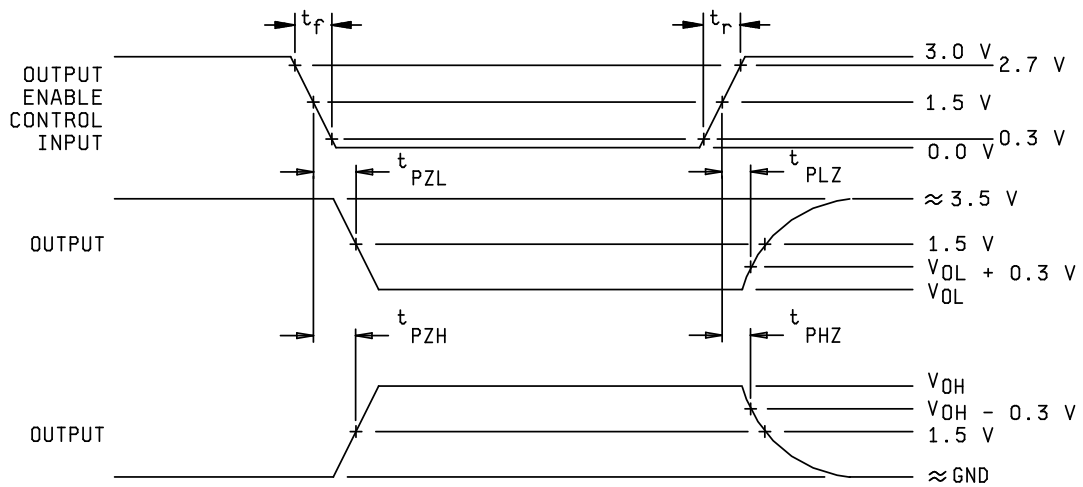


FIGURE 5. Switching waveforms and test circuit.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>15</b>

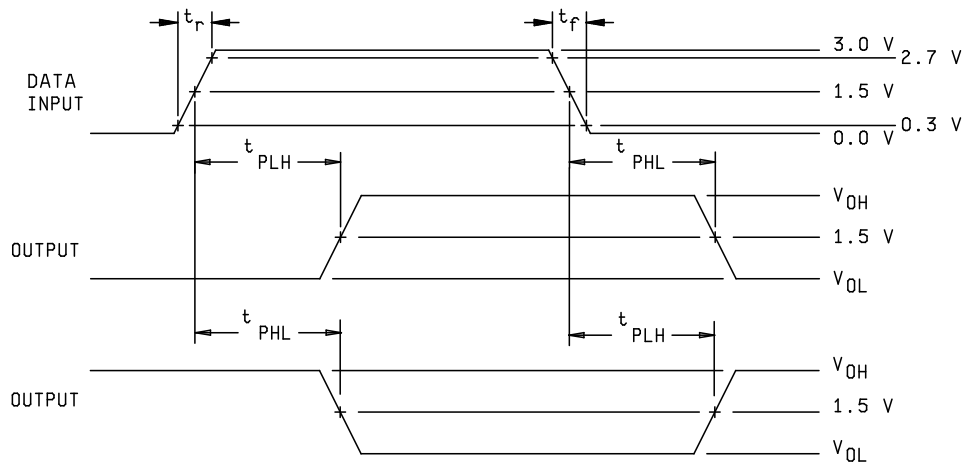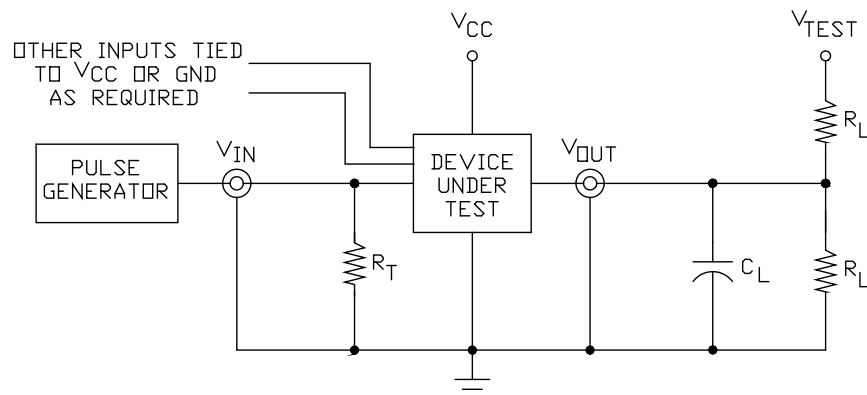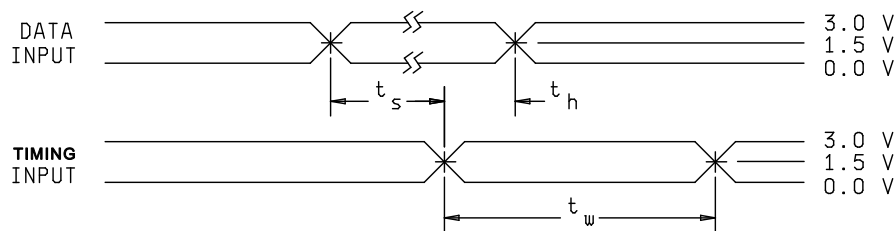

**NOTES:**

1. When measuring  $t_{PLZ}$  and  $t_{PZL}$ :  $V_{TEST} = 7.0\text{ V}$ .
2. When measuring  $t_{PHZ}$ ,  $t_{PZH}$ ,  $t_{PLH}$ , and  $t_{PHL}$ :  $V_{TEST} = \text{open}$ .
3. The  $t_{PZL}$  and  $t_{PLZ}$  reference waveform is for the output under test with internal conditions such that the output is low at  $V_{OL}$  except when disabled by the output enable control. The  $t_{PZH}$  and  $t_{PHZ}$  reference waveform is for the output under test with internal conditions such that the output is high at  $V_{OH}$  except when disabled by the output enable control.
4.  $C_L = 50\text{ pF}$  minimum or equivalent (includes test jig and probe capacitance).
5.  $R_L = 500\Omega$  or equivalent.
6.  $R_T = 50\Omega$  or equivalent.
7. Input signal from pulse generator:  $V_{IN} = 0.0\text{ V}$  to  $3.0\text{ V}$ ;  $PRR \leq 10\text{ MHz}$ ;  $t_r \leq 2.5\text{ ns}$ ;  $t_f \leq 2.5\text{ ns}$ ;  $t_r$  and  $t_f$  shall be measured from  $0.3\text{ V}$  to  $2.7\text{ V}$  and from  $2.7\text{ V}$  to  $0.3\text{ V}$ , respectively; duty cycle = 50 percent.
8. Timing parameters shall be tested at a minimum input frequency of  $1\text{ MHz}$ .
9. The outputs are measured one at a time with one transition per measurement.

FIGURE 5. Switching waveforms and test circuit – Continued.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>16</b>



4. VERIFICATION

4.1 Sampling and inspection. For device classes Q and V, sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

4.2 Screening. For device classes Q and V, screening shall be in accordance with MIL-PRF-38535, and shall be conducted on all devices prior to qualification and technology conformance inspection.

4.2.1 Additional criteria for device classes Q and V.

- a. The burn-in test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document revision level control of the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.
- b. Interim and final electrical test parameters shall be as specified in table II herein.
- c. Additional screening for device class V beyond the requirements of device class Q shall be as specified in MIL-PRF-38535, appendix B.

4.3 Qualification inspection for device classes Q and V. Qualification inspection for device classes Q and V shall be in accordance with MIL-PRF-38535. Inspections to be performed shall be those specified in MIL-PRF-38535 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4 Conformance inspection. Technology conformance inspection for classes Q and V shall be in accordance with MIL-PRF-38535 including groups A, B, C, D, and E inspections, and as specified herein.

4.4.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. For device classes Q and V, subgroups 7 and 8 shall include verifying the functionality of the device.
- c.  $C_{IN}$  and  $C_{I/O}$  shall be measured only for initial qualification and after process or design changes which may affect capacitance.  $C_{IN}$  and  $C_{I/O}$  shall be measured between the designated terminal and GND at a frequency of 1 MHz. This test may be performed at 10 MHz and guaranteed, if not tested, at 1 MHz. The DC bias for the pin under test ( $V_{BIAS}$ ) = 2.5 V or 3.0 V. For  $C_{IN}$  and  $C_{I/O}$ , test all applicable pins on five devices with zero failures.

For  $C_{IN}$  and  $C_{I/O}$ , a device manufacturer may qualify devices by functional groups. A specific functional group shall be composed of function types, that by design, will yield the same capacitance values when tested in accordance with table I, herein. The device manufacturer shall set a function group limit for the  $C_{IN}$  and  $C_{I/O}$  tests. The device manufacturer may then test one device functional group, to the limits and conditions specified herein. All other device functions in that particular functional group shall be guaranteed, if not tested, to the limits and test conditions specified in table I, herein. The device manufacturers shall submit to DLA Land and Maritime-VA the device functions listed in each functional group and the test results for each device tested.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>17</b>

d. Ground and  $V_{CC}$  bounce tests are required for all device classes. These tests shall be performed only for initial qualification, after process or design changes which may affect the performance of the device, and any changes to the test fixture.  $V_{OLP}$ ,  $V_{OLV}$ ,  $V_{OHP}$ , and  $V_{OHV}$  shall be measured for the worst case outputs of the device. All other outputs shall be guaranteed, if not tested, to the limits established for the worst case outputs. The worst case outputs tested are to be determined by the manufacturer. Test 5 devices assembled in the worst case package type supplied to this document. All other package types shall be guaranteed, if not tested, to the limits established for the worst case package. The 5 devices to be tested shall be the worst case device type supplied to this drawing. All other device types shall be guaranteed, if not tested, to the limits established for the worst case device type. The package type and device type to be tested shall be determined by the manufacturer. The device manufacturer will submit to DLA Land and Maritime-VA data that shall include all measured peak values for each device tested and detailed oscilloscope plots for each  $V_{OLP}$ ,  $V_{OLV}$ ,  $V_{OHP}$ , and  $V_{OHV}$  from one sample part per function. The plot shall contain the waveforms of both a switching output and the output under test.

Each device manufacturer shall test product on the fixtures they currently use. When a new fixture is used, the device manufacturer shall inform DLA Land and Maritime-VA of this change and test the 5 devices on both the new and old test fixtures. The device manufacturer shall then submit to DLA Land and Maritime-VA data from testing on both fixtures, that shall include all measured peak values for each device tested and detailed oscilloscope plots for each  $V_{OLP}$ ,  $V_{OLV}$ ,  $V_{OHP}$ , and  $V_{OHV}$  from one sample part per function. The plot shall contain the waveforms of both a switching output and the output under test.

For  $V_{OHP}$ ,  $V_{OHV}$ ,  $V_{OLP}$ , and  $V_{OLV}$ , a device manufacturer may qualify devices by functional groups. A specific functional group shall be composed of function types, that by design, will yield the same test values when tested in accordance with table I, herein. The device manufacturer shall set a functional group limit for the  $V_{OHP}$ ,  $V_{OHV}$ ,  $V_{OLP}$ , and  $V_{OLV}$  tests. The device manufacturer may then test one device function from a functional group, to the limits and conditions specified herein. All other device functions in that particular functional group shall be guaranteed, if not tested, to the limits and conditions specified in table I, herein. The device manufacturers shall submit to DLA Land and Maritime-VA the device functions listed in each functional group and test results, along with the oscilloscope plots, for each device tested.

TABLE II. Electrical test requirements.

Test requirements	Subgroups (in accordance with MIL-PRF-38535, table III)	
	Device class Q	Device class V
Interim electrical parameters (see 4.2)	---	1
Final electrical parameters (see 4.2)	<u>1/</u> 1, 2, 3, 7, 8, 9, 10, 11	<u>2/</u> 1, 2, 3, 7, 8, 9, 10, 11
Group A test requirements (see 4.4)	1, 2, 3, 4, 7, 8, 9, 10, 11	1, 2, 3, 4, 7, 8, 9, 10, 11
Group C end-point electrical parameters (see 4.4)	1, 2, 3, 7, 8	1, 2, 3, 7, 8, 9, 10, 11
Group D end-point electrical parameters (see 4.4)	1, 2, 3, 7, 8	1, 2, 3, 7, 8
Group E end-point electrical parameters (see 4.4)	1, 7, 9	1, 7, 9

1/ PDA applies to subgroup 1.

2/ PDA applies to subgroups 1 and 7.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>18</b>

4.4.2 Group C inspection. The group C inspection end-point electrical parameters shall be as specified in table II herein.

4.4.2.1 Additional criteria for device classes Q and V. The steady-state life test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The test circuit shall be maintained under document revision level control by the device manufacturer's TRB in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.

4.4.3 Group D inspection. The group D inspection end-point electrical parameters shall be as specified in table II herein.

4.4.4 Group E inspection. Group E inspection is required only for parts intended to be marked as radiation hardness assured (see 3.5 herein).

- a. End-point electrical parameters shall be as specified in table II herein.
- b. For device classes Q and V, the devices or test vehicle shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535 for the RHA level being tested. All device classes must meet the postirradiation end-point electrical parameter limits as defined in table I at  $T_A = +25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , after exposure, to the subgroups specified in table II herein.

## 5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535 for device classes Q and V.

## 6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.1.1 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor prepared specification or drawing.

6.2 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished using DD Form 1692, Engineering Change Proposal, or email communication.

6.3 Record of users. Military and industrial users should inform DLA Land and Maritime when a system application requires configuration control and which SMD's are applicable to that system. DLA Land and Maritime will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DLA Land and Maritime-VA, telephone (614) 692-8108.

6.4 Comments. Comments on this drawing should be directed to DLA Land and Maritime-VA, Columbus, Ohio 43218-3990, or telephone (614) 692-0591.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535 and MIL-HDBK-1331.

6.6 Sources of supply.

6.6.1 Sources of supply for device classes Q and V. Sources of supply for device classes Q and V are listed in MIL-HDBK-103 and QML-38535. The vendors listed in MIL-HDBK-103 and QML-38535 have submitted a certificate of compliance (see 3.6 herein) to DLA Land and Maritime-VA and have agreed to this drawing.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-96746</b>
		REVISION LEVEL <b>D</b>	SHEET <b>19</b>

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 22-10-26

Approved sources of supply for SMD 5962-96746 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DLA Land and Maritime-VA. This information bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535. DLA Land and Maritime maintains an online database of all current sources of supply a <https://landandmaritimeapps.dla.mil/programs/smcr/>.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
5962-9674601QKA	<u>3/</u>	SNJ54ABT853W
5962-9674601QLA	<u>3/</u>	SNJ54ABT853JT
5962-9674601Q3A	01295	SNJ54ABT853FK

1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.

2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

3/ Not available from an approved source of supply.

Vendor CAGE  
number

01295

Vendor name  
and address

Texas Instruments, Inc.  
Semiconductor Group  
8505 Forest Ln.  
P.O. Box 660199  
Dallas, TX 75243

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.